



THE HALLICRAFTERS CO.

MODEL S-39, Skyranger

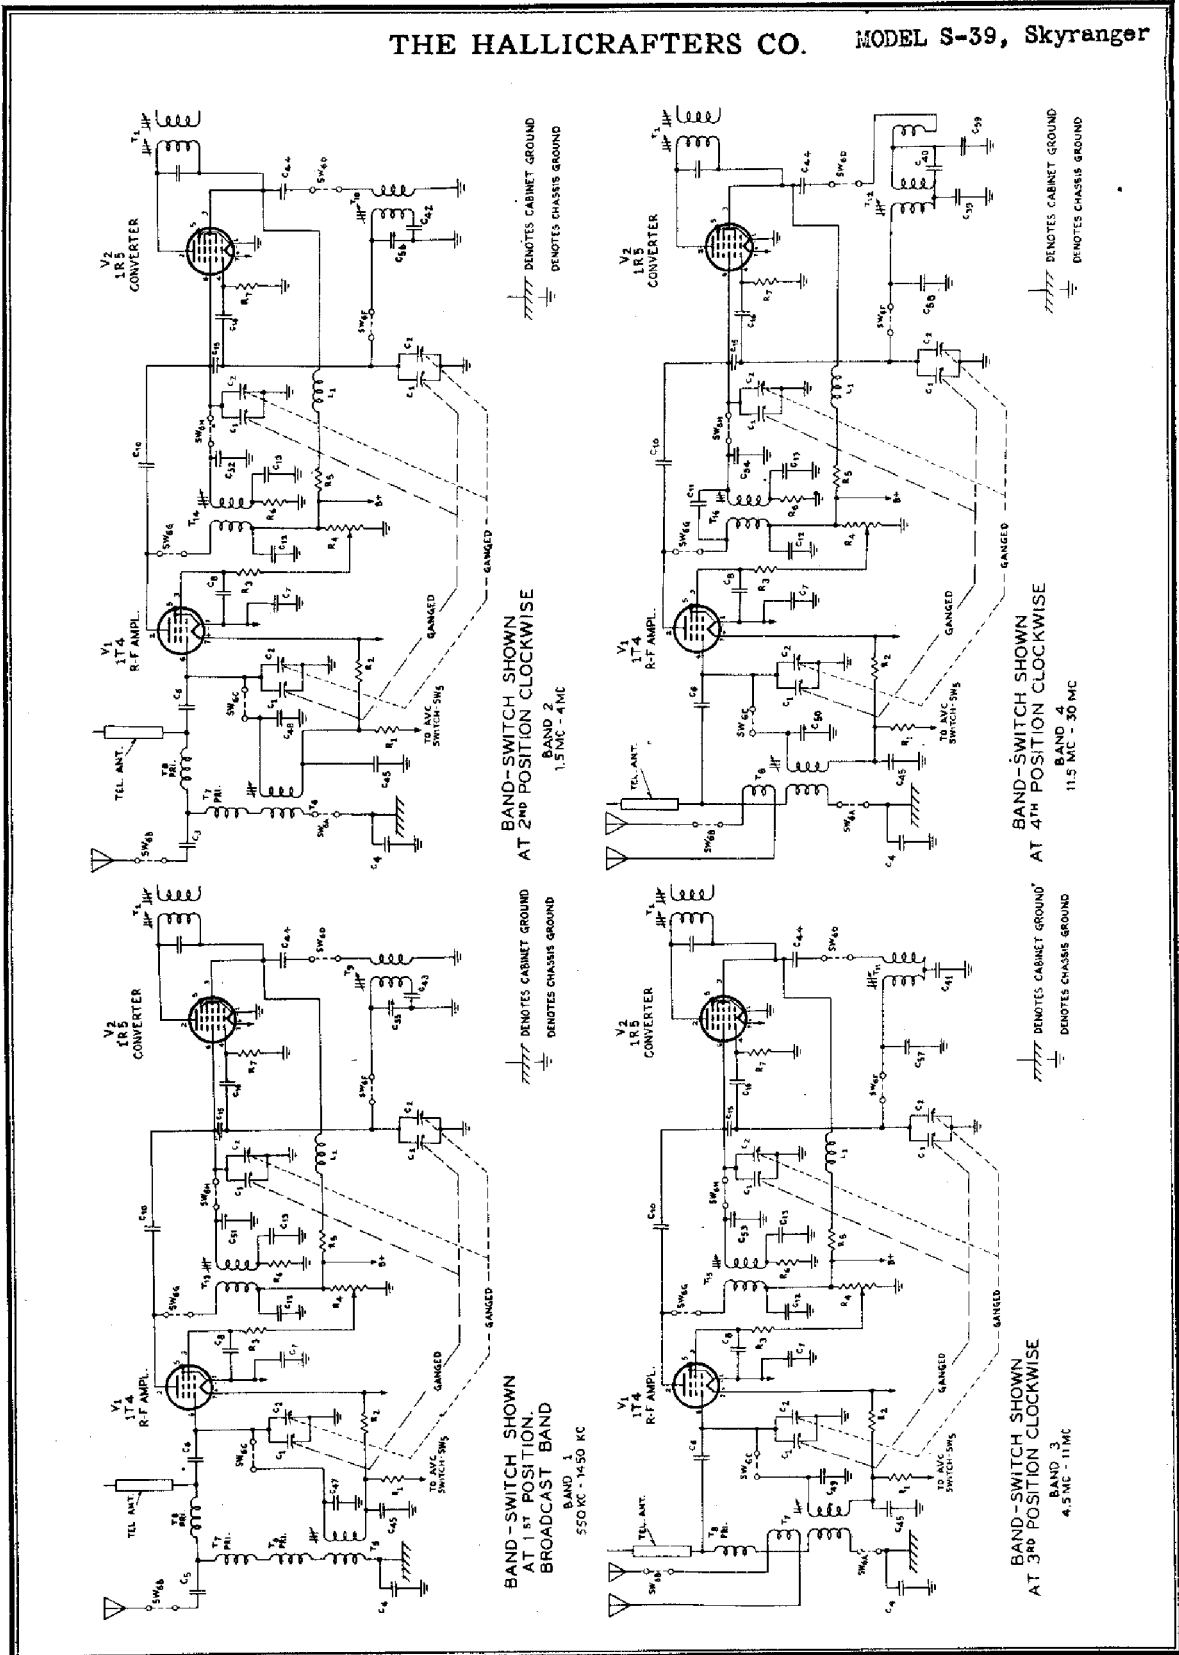

MODEL S-39, Skyranger THE HALLICRAFTERS CO.

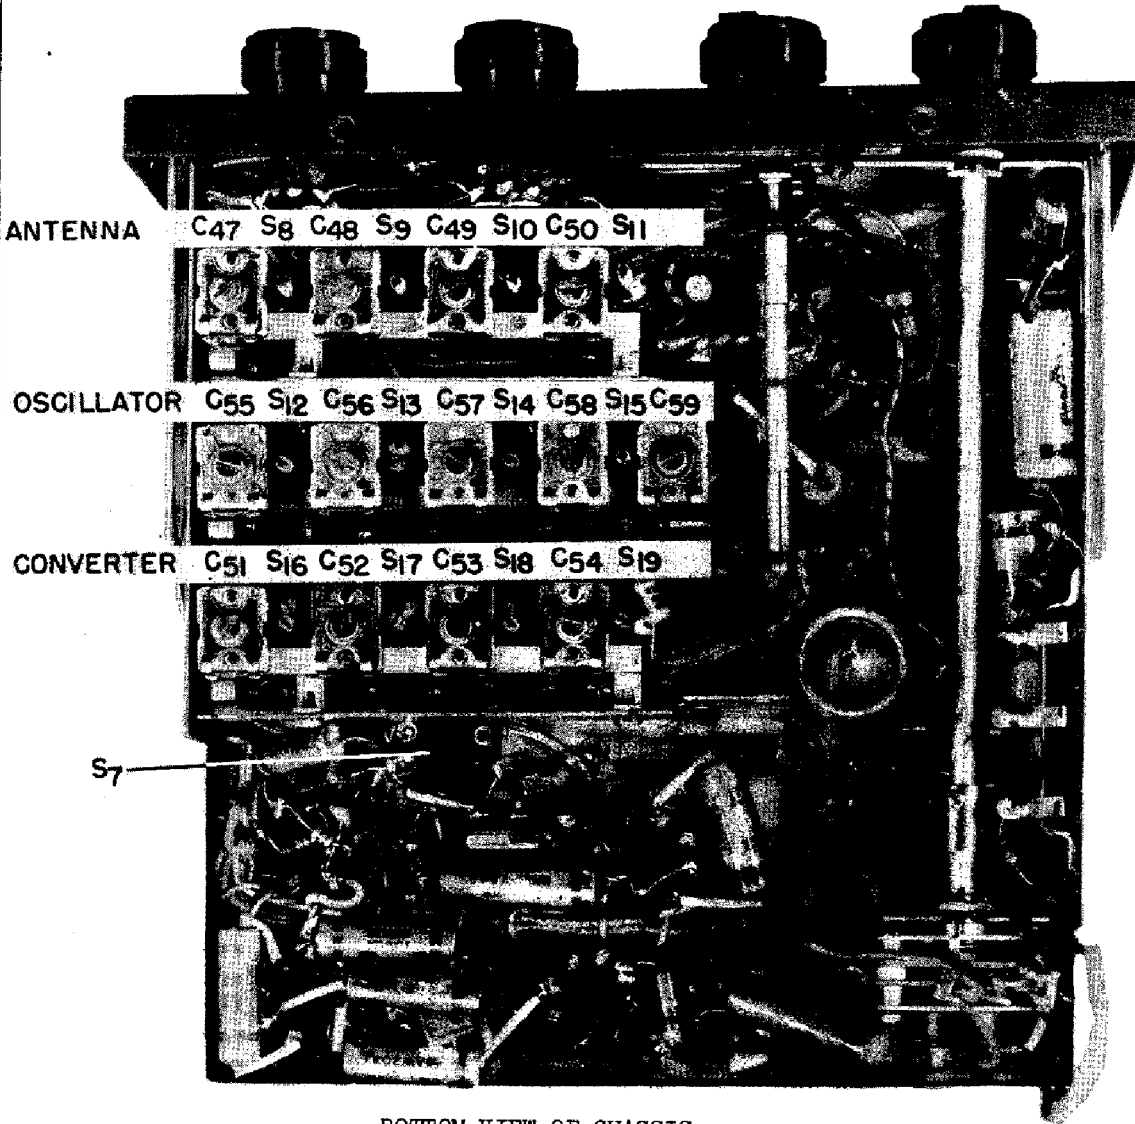

BOTTOM VIEW OF CHASSIS

TUBE	TYPE	PURPOSE
V ₁	1T4	R-F amplifier
V ₂	1R5	Converter and oscillator
V ₃	1P5GT	First i-f amplifier
V ₄	1P5GT	Second i-f amplifier
V ₅	1H5GT	Detector, A-V-C and first audio amplifier
V ₆	3Q5GT	Audio amplifier
V ₇	35Z5GT	Rectifier
V ₈	1H5GT	Beat frequency oscillator and automatic noise limiter
V ₉	35Z5GT	Rectifier

©John F. Rider

THE HALLICRAFTERS CO.

MODEL S-39, Skyranger

Connect "Hot" lead of signal generator to extended section of telescoping antenna through the 6.5 mfd dummy antenna condenser.

Connect ground side of generator to chassis Without disconnecting the signal generator, after completing the I-F transformer alignment, adjust the BFO transformer as follows:

Set BFO switch at ON Remove modulation from the signal generator. Adjust trimmer (C₄₇ to C₅₀) and slug S₁ to S₁₀ in the order shown on the alignment chart. Adjust tuning slug S₁ to desired pitch (approx. 1000 cycles). Slug S₁ is located under the shield plate.

Note: When aligning bands 3 and 4 "rock" the MAIN TUNING control slightly to peak the adjustment. When aligning the low frequency end of band 4 by adjusting slug S₁₅, the oscillator may function. A slight adjustment of condenser C₅₉ will bring it back into oscillation.

Note: Only one section of the telescoping antenna shall extend above the top cover of the receiver. (This procedure is necessary to obtain an accurate calibration for the receiver when aligning with the dummy antenna of 6.5 mfd.) The receiver's top cover must be fastened down for the following adjustments.

Repeat adjustments of slugs S₁ generator to extended section of telescoping antenna through the 6.5 mfd dummy antenna condenser for maximum output.

Connect ground side of generator to chassis Without disconnecting the signal generator, after completing the I-F transformer alignment, adjust the BFO transformer as follows:

Set BFO switch at ON Remove modulation from the signal generator. Adjust trimmer (C₄₇ to C₅₀) and slug S₁ to S₁₀ in the order shown on the alignment chart. Adjust tuning slug S₁ to desired pitch (approx. 1000 cycles). Slug S₁ is located under the shield plate.

Note: When aligning bands 3 and 4 "rock" the MAIN TUNING control slightly to peak the adjustment. When aligning the low frequency end of band 4 by adjusting slug S₁₅, the oscillator may function. A slight adjustment of condenser C₅₉ will bring it back into oscillation.

Note: Only one section of the telescoping antenna shall extend above the top cover of the receiver. (This procedure is necessary to obtain an accurate calibration for the receiver when aligning with the dummy antenna of 6.5 mfd.) The receiver's top cover must be fastened down for the following adjustments.

Equipment needed to align the receiver - Signal generator to cover 455 KC to 30 MC

Non-metallic screwdriver Output meter with a phone plug .1 mfd. condenser 6.5 mfd. condenser. (Dummy antenna)

Setting of controls for I-F alignment - A.M.C. AVC and BFO switches at OFF STAYD BY switch at ON A.F. and R.F. GAIN controls set at maximum gain BAND SWITCH at #1 Band POWER SWITCH at BAT. (power cord removed from wall socket) BANDSPREAD TUNING at "0" Telescoping antenna completely collapsed.

I-F alignment (455 KC) - Remove top and bottom cover for access to internal components Have external antenna plug P₂ out of socket S₀ Connect "hot" lead of signal generator through the .1 mfd condenser to the lug on rear stator section of main tuning condenser (C₁)


Connect "ground" lead of signal generator to chassis Plug output meter plug in the phone jack (J₁) Set MAIN TUNING dial at 1500 KC - Band #1 Tune signal generator to 455 KC. Adjust slugs S₁ to S₆ inclusive for maximum output. Refer to figure 4 for location of the adjusting screws on transformers T₁, T₂ and T₃.

Setting of controls for R-F alignment - A.M.C. and BFO switches at OFF STAYD BY switch at ON A.F. and R.F. GAIN controls set at maximum gain BAND SWITCH at Band to be aligned (See alignment chart) POWER SWITCH at BAT. (power cord removed from wall socket) BANDSPREAD TUNING at "0" Telescoping antenna is collapsed except for bottom section R-F alignment - Leave output meter plug in phone jack (J₁)


F-4. TABLE OF TUBE SOCKET VOLTAGES Measured from socket pin to ground with 1000 ohm-per-volt meter All voltages are D-C unless otherwise specified.

Tube	Pin Number								
	1	2	3	4	5	6	7	8	
Battery Supply									
V ₁ 1T4	2.62	87	84	NC	2.82	0	4-1	X	X
V ₂ 1R5	0	65	85	0	0	0	1-5	X	X
V ₃ 1P6GT	0	2-7	87	60	NC	11-5	1-5	NC	0
V ₄ 1P6GT	0	2-8	88	88	NC	X	1-4	NC	0
V ₅ 1H5GT	0	1-45	62	NC	0	X	0	NC	0
V ₆ 3Q5GT	NC	7-4	84	98	0	X	4-4	5-9	X
V ₇ 3Z5GT	NC	0	NC	X	0	X	0	0	X
V ₈ 1H6GT	0	4-4	*70	NC	0	X	2-8	NC	3-5
V ₉ 3Z5GT	NC	0	NC	X	0	X	0	0	X
117 Volts AC									
V ₁ 1T4	2.8	103	92	NC	2-7	0	4-2	X	X
V ₂ 1R5	0	75	75	0	0	0	1-5	X	X
V ₃ 1P6GT	0	2-5	105	75	NC	11-40	1-45	NC	0
V ₄ 1P6GT	0	2-95	102	105	NC	X	1-65	NC	0
V ₅ 1H5GT	0	1-5	70	NC	0	X	0	NC	0
V ₆ 3Q5GT	NC	7-6	100	110	0	X	4-6	6-1	X
V ₇ 3Z5GT	NC	0	7-8 A-C	X	114 A-C	X	31-5 A-C	110	X
V ₈ 1H6GT	0	4-3	*92-5	NC	0	X	2-95	NC	3-5
V ₉ 3Z5GT	115 A-C	33-5 A-C	43 A-C	X	114 A-C	115 A-C	65 A-C	110	X
120 Volts DC									
V ₁ 1T4	2.8	103	92	NC	2-6	0	4-2	X	X
V ₂ 1R5	0	72	72	0	0	0	1-5	X	X
V ₃ 1P6GT	0	2-8	103	72	NC	11-5	1-5	NC	0
V ₄ 1P6GT	0	3-2	102	102	NC	X	1-6	NC	0
V ₅ 1H5GT	0	1-6	87	NC	0	X	0	NC	0
V ₆ 3Q5GT	NC	7-7	100	103	0	X	4-8	6-3	X
V ₇ 3Z5GT	NC	0	7-3	X	119	X	36	110	X
V ₈ 1H6GT	0	4-8	*85	NC	0	X	3-2	NC	4
V ₉ 3Z5GT	1120	35	43	X	118	120	70	110	X

NC - No Connection.
X - No Pin.
* - With BFO switch at OFF.
† - Tie In.

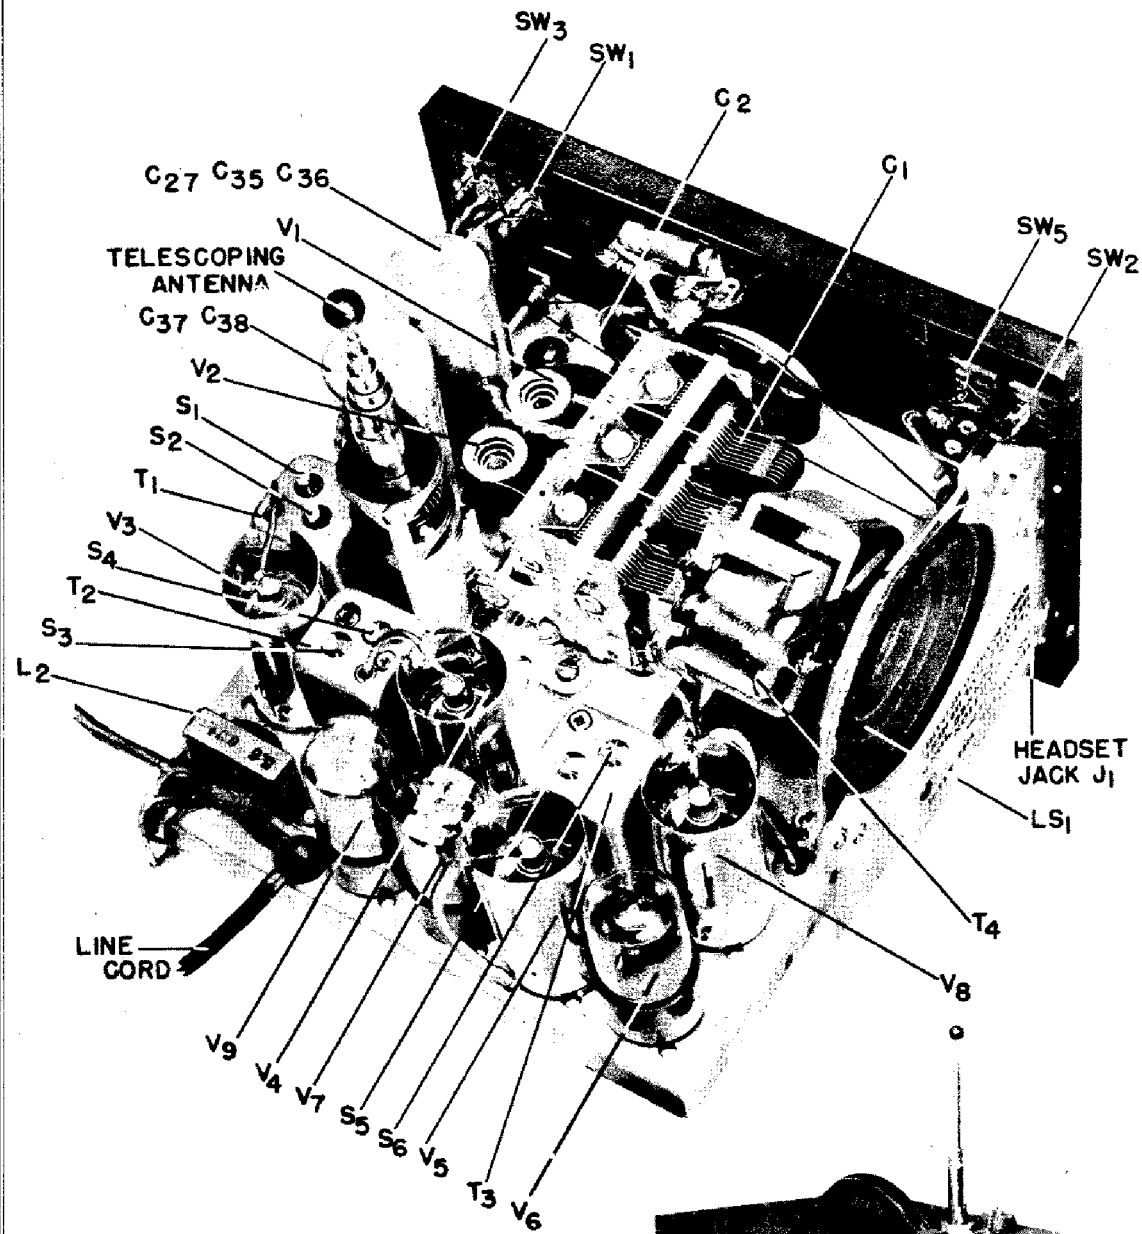


TOP VIEW.

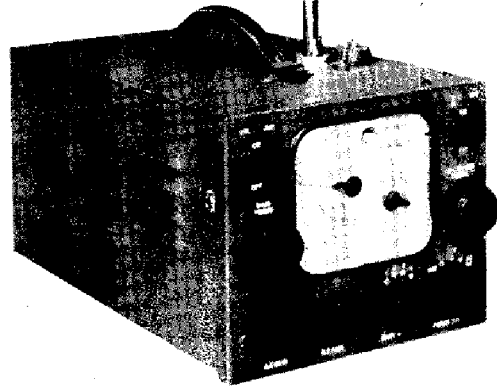

©John F. Rider

THE HALLICRAFTERS CO. MODEL S-39, Skyranger

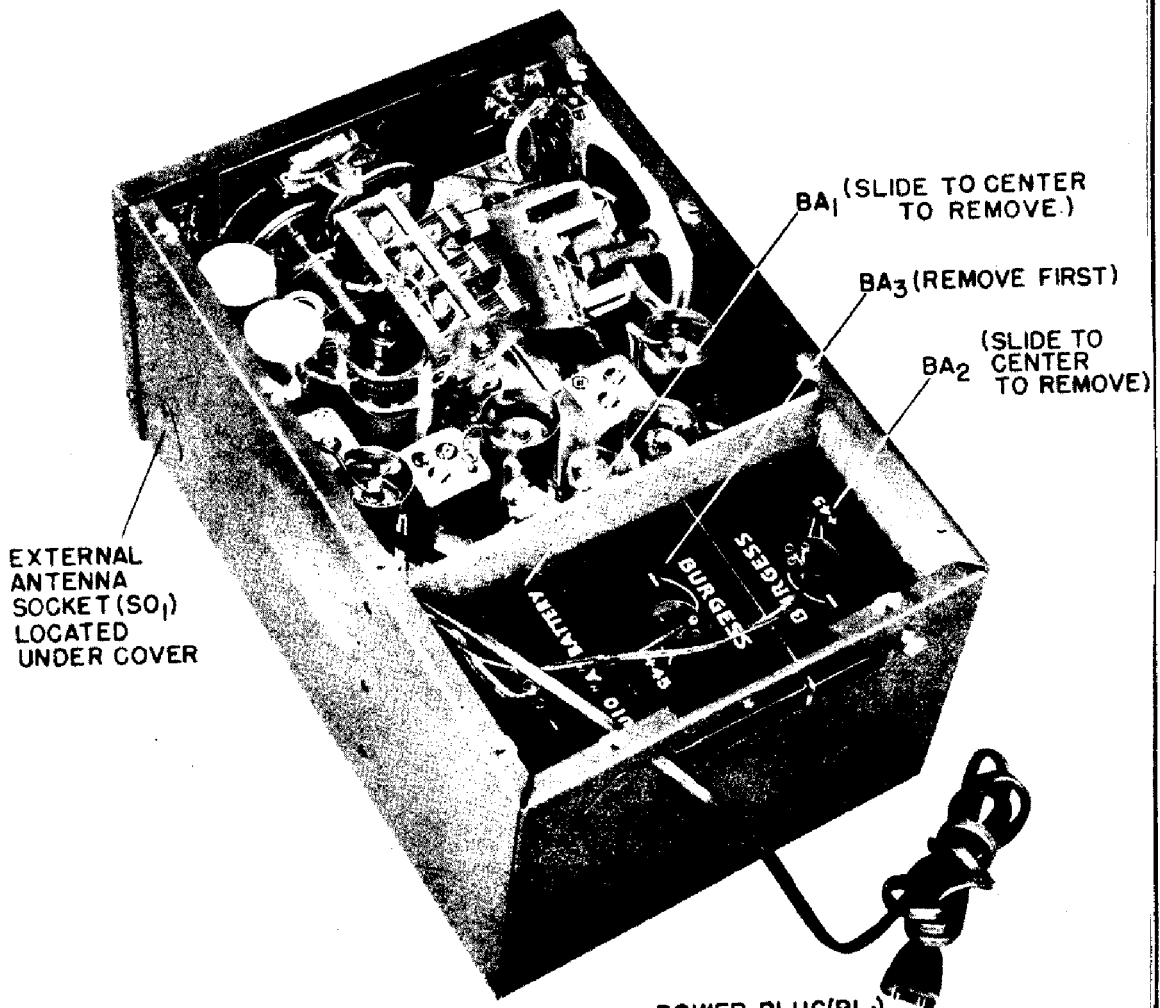

MODEL S-39 RECEIVER, REAR VIEW, COVER REMOVED, SHOWING POWER CORD COMPARTMENT AND BATTERY COMPARTMENT.

A-3. POWER SUPPLIES - Two separate and independent power supplies are incorporated in the receiver, namely an internal battery supply and a rectifier-filter type of supply for use with an external a-c/d-c source.

The battery supply consists of two 45-volt "B" batteries (BA₂ and BA₃) connected in series, and one 6-volt "A" battery (BA₁) all of which are located in the back section of the carrying-case cabinet. See figure 6.

The a-c/d-c supply consists of two type 35Z5GT rectifier tubes (V₇ and V₉) and the associated filter (L₂, C₃₅ and C₂₇) and filament voltage dropping resistors (R₃₂, R₃₃, R₃₄ and R₃₅). This supply may be used whenever commercial power lines, delivering 110-to 117-volts A-C or D-C are accessible. Refer to Section D for operating instructions.

The supply to be used is selected from the front panel by POWER SWITCH, SW₇. Refer to figure 2 for circuit details.

MODEL S-39, Skyranger THE HALLICRAFTERS CO.

REF. SYMBOL	NAME OF PART AND DESCRIPTION	MFR. CODE	CONTR. S. PART NO.	REF. SYMBOL	NAME OF PART AND DESCRIPTION	MFR. CODE	CONTR.'S. PART NO.
R ₁	Resistor, 2.2 megohm ± 10%, 1/4 watt, carbon	ASA	RC10AB225K	C ₈	Capacitor, 0.01 mfd. -10 + 40%, 400 V. D-C working, paper dielectric, type AB	SP	46AW103J
R ₂	Same as R ₁						
R ₃	Resistor, 8,200 ohm ± 10%, 1/2 watt, carbon	ASA	RC2LAB22K				
R ₄	Resistor, variable, 1/2 megohm ± 20%, carbon	CT	25C071	C ₉	Same as C ₈		
R ₅	Resistor, 4700 ohm ± 10%, 1/4 watt, carbon	ASA	RC10AB472K				
R ₆	Same as R ₁			C ₁₀	Capacitor, adjustable, min. cap. 5 mmfd., max. cap. 6.5 mmfd., 500 V. D-C working, temp. coeff. -.00075 mmfd./mmfd./degree Cent., ceramic dielectric, type 307-004	CRL	47A005
R ₇	Resistor, 100,000 ohm ± 10%, 1/2 watt, carbon	ASA	RC10AE104K				
R ₈	Resistor, 1.0 megohm ± 10%, 1/2 watt, carbon	ASA	RC10AE105K	C ₁₁	Same as C ₁₀		
R ₉	Same as R ₁			C ₁₂	Same as C ₇		
R ₁₀	Resistor, 51,000 ohm ± 5%, 1/2 watt, carbon	ASA	RC21AE513J	C ₁₃	Same as C ₇		
R ₁₁	Same as R ₁			C ₁₄	Capacitor, 3 mmfd., twisted wire leads		
R ₁₂	Same as R ₈						
R ₁₃	Same as R ₇			C ₁₅	Capacitor, 2 mmfd., twisted wire leads		
R ₁₄	Resistor, variable, 1/2 megohm ± 20%, carbon	CT	25C070				
R ₁₅	Resistor, 10 megohm ± 20%, 1/2 watt, carbon	ASA	RC10AE106M	C ₁₆	Same as C ₃		
R ₁₆	Same as R ₇			C ₁₇	Same as C ₇		
R ₁₇	Resistor, 470,000 ohm ± 20%, 1/2 watt, carbon	ASA	RC10AE474M	C ₁₈	Same as C ₈		
R ₁₈	Same as R ₁₇			C ₁₉	Not used		
R ₁₉	Same as R ₁₇			C ₂₀	Same as C ₇		
R ₂₀	Resistor, 47,000 ohm ± 20%, 1/2 watt, carbon	ASA	RC10AE473M	C ₂₁	Capacitor, 100 mmfd. ± 20%, 500 V. D-C working, mica dielectric	ASA	CM20A101M
R ₂₁	Same as R ₂₀						
R ₂₂	Not used			C ₂₂	Capacitor, 0.004 mfd. -10 + 40%, 600 V. D-C working, paper dielectric, type 684	A	46A2402J
R ₂₃	Not used						
R ₂₄	Resistor, 24 ohm ± 5%, 1 watt, carbon	ASA	RC31AE240J	C ₂₃	Capacitor, 0.1 mfd. -10 + 40%, 200 V. D-C working, paper dielectric, type 284	A	46AU104J
R ₂₅	Resistor, 330 ohm ± 5%, 9 watt, wire wound, candohm, type FH	MT	24A829				
R ₂₆	Not used			C ₂₄	Same as C ₈		
R ₂₇	Resistor, 1000 ohm ± 10%, 1/2 watt, carbon	ASA	RC10AE102K	C ₂₅	Capacitor, 0.005 mfd. -10 + 40%, 400 V. D-C working, paper dielectric, type 484	A	46AW502J
R ₂₈	Not used						
R ₂₉	Resistor, 560 ohm ± 10%, 1/2 watt, carbon	ASA	RC10AE561K	C ₂₆	Capacitor, 0.02 mfd. -10 + 40%, 400 V. D-C working, paper dielectric, type AB	SP	46AW203J
R ₃₀	Same as R ₂₉			C ₂₇	Capacitor, 60 mfd. -10 + 50%, 150 V. D-C working, electrolytic, one section of 3 section unit, 6 prong plug-in assembly, type 10B336	IC	45A065
R ₃₁	Not used			C ₂₈	Capacitor, 0.02 mfd. -10 + 40%, 400 V. D-C working, paper dielectric, type AB	SP	46AW203J
R ₃₂	Same as R ₂₇			C ₂₉	Same as C ₂₈		
R ₃₃	Resistor, 820 ohm ± 10%, 1 watt, carbon	ASA	RC31AE821K	C ₃₀	Capacitor, 3 turn twisted wire leads		
R ₃₄	Resistor, 1645 ohm ± 10%, tapped at 800 ohm, 7.4 watt, 2 unit, wire wound, unit #1 800 ohm (R ₃₄), unit #2 845 ohm (R ₃₅), candohm, type MW-2			C ₃₁	Same as C ₂₁		
R ₃₅		IRC	24A044	C ₃₂	Capacitor, 510 mmfd. ± 5%, 500 V. D-C working, mica dielectric	ASA	CM20A511J
R ₃₆	Resistor, 820 ohm ± 10%, 1/2 watt, carbon	ASA	RC10AB821K	C ₃₃	Same as C ₇		
R ₃₇	Not used			C ₃₄	Capacitor, 0.05 mfd. -10 + 40%, 400 V. D-C working, paper dielectric, type 484	A	46AW503J
R ₃₈	Same as R ₃₄			C ₃₅	Capacitor, 30 mfd. -10 + 50%, 150 V. D-C working, electrolytic, one part of triple unit - refer to C ₂₇		
R ₃₉	Resistor, 1.5 megohm ± 20%, 1/2 watt, carbon	ASA	RC10AE155M	C ₃₆	Capacitor, 100 mfd. -10 + 65%, 5 V. D-C working, electrolytic, one part of triple unit - refer to C ₂₇		
R ₄₀	Resistor, 450 ohm tapped at 87 ohm, 7 watt, 2 unit, wire wound, unit #1 363 ohm (R ₄₀), unit #2 87 ohm (R ₄₁) candohm, special			C ₃₇	Capacitor, dual, 120 mfd. -10 + 50%, 150 V. D-C working (C ₃₆), 60 mfd. -10 ± 85%, 5 V. D-C working (C ₃₇), unit hermetically sealed	IC	45A066
R ₄₁		MT	24A819	C ₃₈	4 prong plug-in assembly, type 10B335		
R ₄₂	Same as R ₇			C ₃₉	Capacitor, 4500 mmfd. ± 5%, 500 V. D-C working, mica dielectric	ASA	CM35A452J
C ₁	Capacitor, variable, 3 section, 2 unit, unit #1-(C ₁), max. cap. per section 352 mmfd., air dielectric, unit #2-(C ₂) max. cap. per OM section 22 mmfd. air dielectric, each unit has separate drive shaft to which pulleys are fixed, type 945-3-20			C ₄₀	Capacitor, 240 mmfd. ± 5%, 500 V. D-C working, mica dielectric	ASA	CM20A241J
C ₂		48B055	C ₃₉	Capacitor, 15 mmfd. ± 20%, 500 V. D-C working, temp. coeff. -.00075 mmfd./mmfd./degree Cent., ceramic dielectric, type 809-047			
C ₃	Capacitor, 51 mmfd. ± 5%, 500 V. D-C working, low loss mica dielectric	ASA	CM20C510J				
C ₄	Capacitor, 0.1 mfd. -10 + 40%, 400 V. D-C working, paper dielectric, type 464	A	46AV104J				
C ₅	Capacitor, 15 mmfd. ± 20%, 500 V. D-C working, temp. coeff. -.00075 mmfd./mmfd./degree Cent., ceramic dielectric, type 809-047	CRL	47A027				
C ₆	Capacitor, 10 mmfd. ± 20%, 500 V. D-C working, temp. coeff. -.00075 mmfd./mmfd./degree Cent., ceramic dielectric, type 811-013.	CRL	47A028				
C ₇	Capacitor, 0.05 mfd. -10 + 40%, 200 V. D-C working, paper dielectric, type AB	SP	46AU503J				

©John F. Rider

THE HALLICRAFTERS CO. MODEL S-39, Skyranger

REF. SYMBOL	NAME OF PART AND DESCRIPTION	MFR. CODE	CONTR.'S. PART NO.	REF. SYMBOL	NAME OF PART AND DESCRIPTION	MFR. CODE	CONTR.'S. PART NO.
C ₄₁	Capacitor, 2000 mmfd. ± 5%, 500 V. D-C working, mica dielectric	ASA	CM30A202J	SW ₇	Switch, rotary selector, 3 position, single section, non-shorting type contacts, has a type 8030-K1 toggle action, SPST A-C switch ganged on rear of assembly "ON" position full clockwise, type H	OM	60A182
C ₄₂	Capacitor, 910 mmfd. ± 5%, 500 V. D-C working, mica dielectric	ASA	CM30A911J	SO ₁	Socket, female, 4 contacts, bakelite insulation, wafer type, brass contacts, 2 mtg. holes with 1/4" mtg. centers, type 2642	CN	10A080
C ₄₃	Capacitor, 390 mmfd. ± 5%, 500 V. D-C working, mica dielectric	ASA	CM20A391J	PL ₁	Plug with line cord, 2 conductor, rubber insulation, #18 ga. stranded copper wire, length 6 feet, 2 prong spring type molded on plug, special	E	87A078
C ₄₄	Same as C ₆			BA ₁	Battery, 6 V. D-C, 2 hole socket, 3-7/8" x 2-15/16" x 5 1/2", type P698A	ROV	27A010
C ₄₅	Same as C ₇			BA ₂	Battery, 45 V. D-C, combination "B" socket, 4-1/8" x 2-9/16" x 5-5/16", type P6303	ROV	27A009
C ₄₆	Capacitor, 0.5 mfd. -10 + 40%, 200 V. D-C working, paper dielectric		46AT504J	BA ₃	Same as BA ₂		
C ₄₇	Capacitor, 4 unit assembly, mica dielectric, compression type adjustment, trimmers mounted on a single metal strip, 3 units with min. cap. 2.7 mmfd., max. cap. 35 mmfd. (C ₄₇ , C ₄₈ , C ₅₀) 1 unit with min. cap. 1.5 mfd., max. cap. 10 mmfd. (C ₄₈ special	UE	44A064	J ₁	Jack, single circuit, normally closed, brass mechanism, bakelite insulation, type 11102	U	36A002
C ₄₈				LS ₁	Loudspeaker; 4 inch O.D. permanent magnet dynamic, includes transformer T ₄ in the assembly, type 4-OM-11A	OT	85B009
C ₄₉				LM ₁	Lamp, indicator, 1-1/8" leads, clear glass bulb type 4 1/2, type NE-7	GE	39A007
C ₅₀				V ₁	Tube, pentode, type 174	RCA	90XL14
C ₅₁	Same as C ₄₇ , C ₄₈ , C ₄₉ , C ₅₀ assembly. C ₅₁ , C ₅₂ , C ₅₃ , C ₅₄ same as C ₄₇ , C ₄₈ , C ₅₀ ; and C ₅₂ same as C ₄₈			V ₂	Tube, pentagrid converter, type 1R5	RCA	90XLR5
C ₅₂				V ₃	Tube, type, 1P5GT	RCA	90X1P5GT
C ₅₃				V ₄	Same as V ₁		
C ₅₄				V ₅	Tube, diode triode, type 1H5GT	RCA	90X1H5GT
C ₅₅	Capacitor, 5 unit assembly, mica dielectric, compression type adjustment, trimmers mounted on a single metal strip, 2 units with min. cap. 1.5 mmfd., max. cap. 10 mfd. (C ₅₅ and C ₅₈), 2 units with min. cap. 2.7 mmfd., max. cap. 35 mmfd. (C ₅₆ and C ₅₉), 1 unit with min. cap. 25 mmfd., MAX. 140 mmfd. (C ₅₉), special	UE	44A092	V ₆	Tube, beam power amplifier, type 3Q6GT	RCA	90X3Q6GT
C ₅₆				V ₇	Tube, half-wave high-vacuum rectifier, type 3Z5GT	RCA	90X3Z5GT
C ₅₇				V ₈	Same as V ₅		
C ₅₈				V ₉	Same as V ₇		
C ₅₉							
C ₆₀	Not used						
C ₆₁	Same as C ₄₀						
C ₆₂	Same as C ₂₁						
T ₁	Transformer, I-F, 455 KC., fixed primary trimmer 155 mmfd., fixed secondary trimmer 80 mmfd., primary and secondary are tuned by adjustable iron cores, special	SI	50A086	T ₁	FOR TROPICAL RECEIVERS USE THE ABOVE PARTS Transformer, I-F, 455 KC., fixed primary trimmer 155 mmfd., fixed secondary trimmer 85 mmfd., primary and secondary are tuned by adjustable iron cores, vacuum impregnated with zophar #1340 and flash dipped in Hollowax #2012, special (Note: T ₁ differs from T ₂ and T ₃ in the length of the wire leads)	SI	50A160
T ₂	Same as T ₁ except for length of leads	SI	50B157	T ₂	Transformer, I-F, 455 KC., fixed primary trimmer 155 mmfd., fixed secondary trimmer 85 mmfd., primary and secondary are tuned by adjustable iron cores, vacuum impregnated with zophar #1340 and flash dipped in Hollowax #2012, special (Note: T ₂ differs from T ₁ and T ₃ in the length of the wire leads)	SI	50A159
T ₃	Same as T ₁ except for length of leads	SI	50B158				
T ₄	Transformer, A-F, primary to match the output of the type 3Q6GT tube, part of speaker assembly LS ₁ . Shown for reference only						
T ₅	Transformer, R-F, 4 unit assembly, tunes from .55 MC. to 30 MC. in 4 bands with condenser C ₁ and C ₂ , inductance adjusted by moveable iron cores.	SWI	51B301				
T ₆							
T ₇							
T ₈							
T ₉	Transformer, R-F, 4 unit assembly, tunes from .55 MC. to 30 MC. in 4 bands with condensers C ₁ and C ₂ , inductance adjusted by moveable iron cores	SWI	51B303				
T ₁₀							
T ₁₁							
T ₁₂							
SW ₂	Switch, DPST, slide action, bakelite insulation, steel mtg. plate with 2 holes having 1-1/8" mtg. centers, type 71	OM	60A061	L ₁	Reactor, R-F, inductance 170 microhenries, air core, vacuum impregnated with zophar #1340 and flash dipped in Hollowax #2012, type 3485	SWI	53A057
SW ₃	Same as SW ₂			L ₂	Reactor, filter, d-c resistance 250 ohms ± 20%, max. load current 30 milliamperes, inductance 3.6 henrys at 30 milliamperes, vacuum wax impregnated and flash dipped in Hollowax #2012, type 1A12B1 modified	GT	56B051
SW ₄	Switch, SPST, toggle action, refer to SW ₇			SW ₆	Switch, rotary selector, 4 position, 3 section, shorting type contacts, bushing 1/4" long, terminal 6 of section 2 front and rear are electrically connected, type RM	MA	60B179
SW ₅	Switch, SPDT, slide, bakelite insulation, brass solder lugs, steel mtg. plate with 2 holes having 1-1/8" mtg. centers, type 77	OM	60A130				
SW ₆	Switch, rotary selector, 4 position, 3 section, shorting type contacts, bushing 1/4" long, type RM	MA	60B160				

©John F. Rider

THE HALLICRAFTERS CO.

MODEL S-39, Skyranger

RECOMMENDED ANTENNA INSTALLATIONS

MFR. CONTR.'S.
CODE PART NO.

NAME OF PART AND DESCRIPTION

REF. SYMBOL

SI 50A151

Transformer, I-F, 455 KC., fixed primary trimmer 155 mmfd., fixed secondary trimmer 85 mmfd., primary and secondary are tuned by adjustable iron cores, vacuum impregnated with zophar #1340 and flash dipped in Hallowax #2012, special, (Note T₃ differs from T₁ and T₂ in the length of the wire leads)

T₃

SWI 51B648

Transformer, R-F, 4 unit assembly, tunes from 0.55 MC. to 30 MC. in 4 bands with condenser C₁ and C₂, inductance adjusted by movable iron cores, wax impregnated with Hallowax #2012

T₅
T₆
T₇
T₈

SWI 51B650


Transformer, R-F, 4 unit assembly, tunes from 0.55 MC. to 30 MC. in 4 bands with condenser C₁ and C₂, inductance adjusted by movable iron cores, wax impregnated with Hallowax #2012

T₉
T₁₀
T₁₁
T₁₂

SWI 51B649

Transformer, R-F, 4 unit assembly, tunes from 0.55 MC. to 30 MC. in 4 bands with condenser C₁ and C₂, inductance adjusted by movable iron cores, wax impregnated with Hallowax #2012

T₁₃
T₁₄
T₁₅
T₁₆

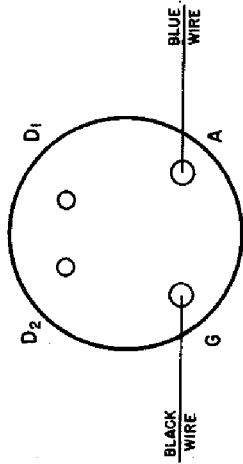

PL2
PIN VIEW

NOTE: PL2 IS SUPPLIED WIRED AS ABOVE

