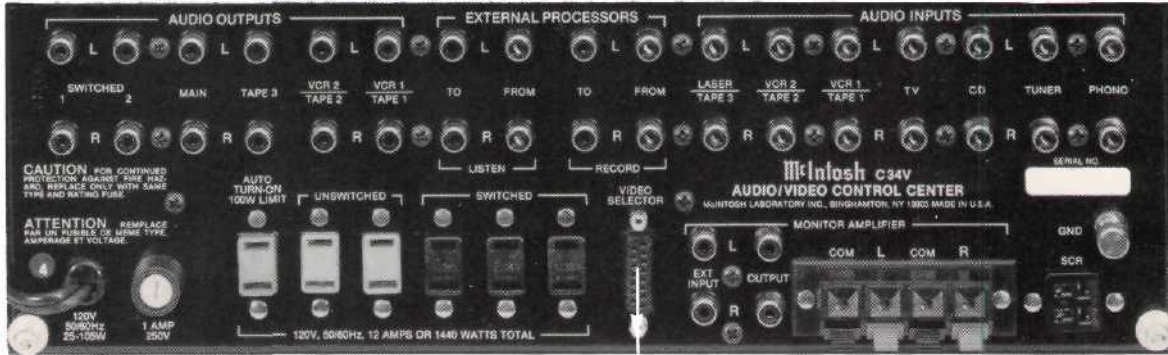# MVS-1 VIDEO SELECTOR

The McIntosh VIDEO SELECTOR, MVS-1, is designed to enable the McIntosh electronic units equipped with the proper connections to control video programs as well as audio. The MVS-1 connects to the computer-type connector on the rear panel, Example:

AUDIO OUTPUTS — EXTERNAL PROCESSORS — AUDIO INPUTS

L L L L L L L L L L

SWITCHED
1 2 MAIN TAPE 3 VCR 2 VCR 1 TO FROM TO FROM LASER VCR 2 VCR 1 TV CD TUNER PHONO
TAPE 2 TAPE 1 TAPE 3 TAPE 2 TAPE 1

R R R R R R R R R R

LISTEN RECORD

CAUTION FOR CONTINUED
PROTECTION AGAINST FIRE HAZ-
ARD, REPLACE ONLY WITH SAME
TYPE AND RATING FUSE.

ATTENTION REMPLACE
PAR UN FUSIBLE DE MÊME TYPE,
AMPERAGE ET VOLTAGE.

McIntosh C34V
AUDIO/VIDEO CONTROL CENTER
McINTOSH LABORATORY INC., BINGHAMTON, NY 13903 MADE IN U.S.A.

SERIAL NO.

AUTO
TURN-ON
100W LIMIT UNSWITCHED SWITCHED VIDEO
SELECTOR

MONITOR AMPLIFIER

COM L COM R

EXT
INPUT OUTPUT

L L

R R

GND

SCR

120V
50/60Hz
25-105W 1 AMP
250V — 120V, 50/60Hz, 12 AMPS OR 1440 WATTS TOTAL —

INTERCONNECTING CONTROL CABLE

CONTROL CENTER

VIDEO INPUTS VIDEO OUTPUTS CHANNEL

TV LASER CD VCR 1 VCR 2 VCR 1 VCR 2. MON 4 3

VHF

TV OUT

ANTENNA AUDIO
IN

McIntosh MVS-1 VIDEO SELECTOR

TV MONITOR

TV SET

VCR 1

TV TUNER

VCR 2

RF ONLY

LASER DISC PLAYER

RF ONLY OUT OUT

RF ONLY

3 SET
COUPLER IN RF ONLY

RF ONLY OUT CONNECTS
CABLE
SYSTEM OR
TV ANTENNA

RF ONLY