

MCINTOSH MR78


The following are the instruction to convert a tuner from American Standard to European Standard.

Note: Only for tuner with serial number from AD5165


To change de-emphasis from 75 μ s to 50 μ s it is need to replace two capacitors, called C406 and C407 from 1500pF to 1000pf or 1100pF.

Use a film capacitor, such as polystyrene or polypropolene type.

The capacitors are located on Output Amp Section accessible from the low cover.

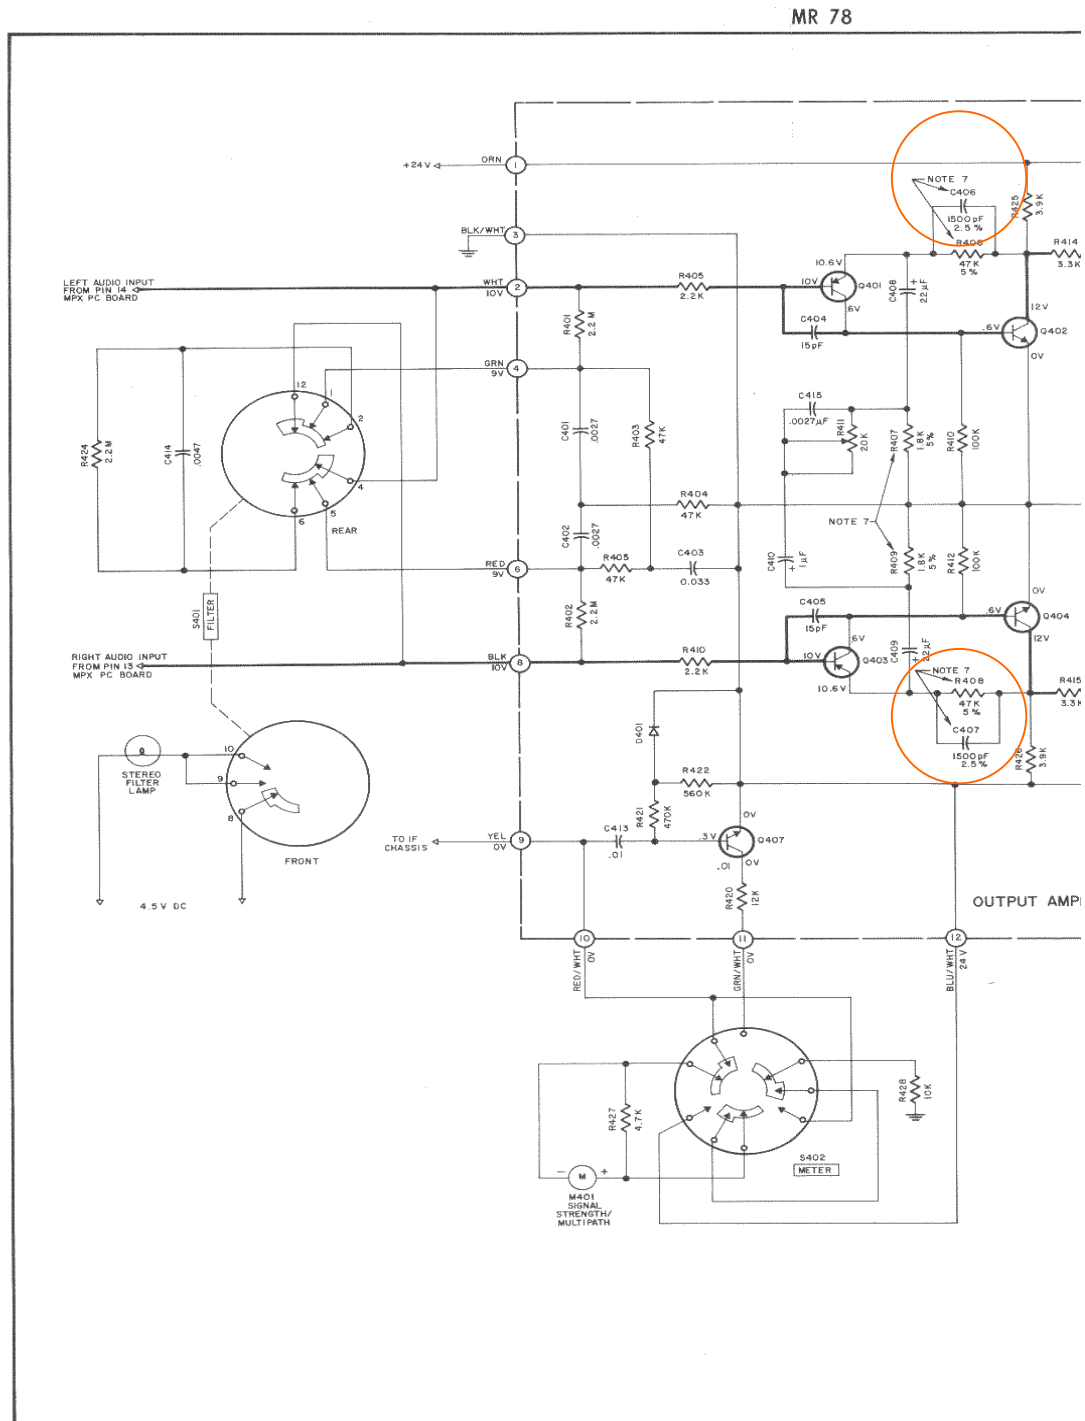

OUTPUT AMP PC BOARD 044-794

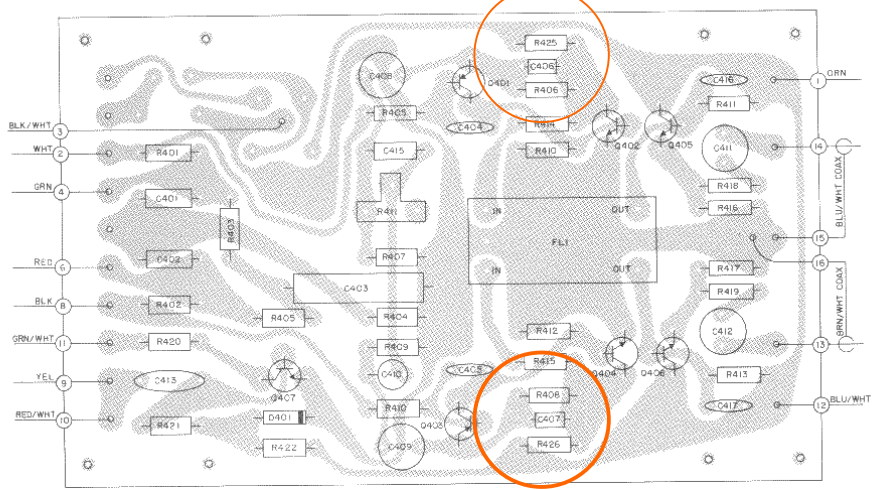

POWER SUPPLY PRINTED CIRCUIT BOARD 044-453

