

TECHNICAL MANUAL
ORGANIZATIONAL, DIRECT SUPPORT,
AND GENERAL SUPPORT
MAINTENANCE REPAIR PARTS
AND SPECIAL TOOLS LISTS
(INCLUDING DEPOT MAINTENANCE REPAIR
PARTS AND SPECIAL TOOLS)

FOR
SIGNAL GENERATOR TEST SETS
AN/USM-44 (NSN 6625-00-669-4031)
AND
AN/USM-44A (NSN 6625-00-176-5708)

HEADQUARTERS, DEPARTMENT OF THE ARMY

JANUARY 1978

TECHNICAL MANUAL

No. 11-6625-508-24P

{

HEADQUARTERS
 DEPARTMENT OF THE ARMY
 WASHINGTON, DC, 3 January 1978

**ORGANIZATIONAL, DIRECT SUPPORT, AND GENERAL
 SUPPORT MAINTENANCE REPAIR PARTS
 AND SPECIAL TOOLS LISTS
 (INCLUDING DEPOT MAINTENANCE REPAIR PARTS
 AND SPECIAL TOOLS)
 FOR
 SIGNAL GENERATOR TEST SETS
 AN/USM-44 (NSN 6625-00-669-4031)
 AND
 AN/USM-44A (NSN 6625-00-176-5708)**

*Current as of 17 August 1977***REPORTING OF ERRORS**

You can improve this manual by recommending improvements using DA Form 20282 (Test) located in the back of the manual. Simply tear out the self-addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Forms 2028-2 (Test) in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Electronics Command, ATTN: DR-SELMA-Q, Fort Monmouth, New Jersey 07703.

In either case a reply will be furnished direct to you.

Table of Contents

SECTION	Page	Illus Figure
I.	1	
II.	5	
Group 00	Signal Generator Test Sets ANIUSM-44, AN/USM-44A.....	5
01	Transit Case Assemblies CY-2105AIUSM-44A, CY-1605/USM-44	9
02	Signal Generators TS-10U, TS- 10A/U.....	11
	0201 Panel assembly 608D-E- 110	15
	0202 Sub-chassis assembly 608D-L-113	19
	0203 Chassis assembly 608D-E-112.....	23
	020301 Terminal board assembly 608D-755-1-PM	27
	020302 Terminal board assembly 608D-75S-2-PM	29
	020303 Terminal board assembly 608D-75S-3-PM	31
	020304 Terminal board assembly 608D-75S-4-PM	33
	0204 Chassis assembly 608D-E-111.....	37
	020401 Terminal board assembly 608D-75R-3-PM	41
	020402 Terminal board assembly 608D-75R-2-PM	48
	020403 Terminal board assembly 608D-75R-1-PM	45
	0205 Generator assembly 608D-59(N)-PL	47
	020501 Generator chassis assembly 608D-59(N)-1-PL.....	49

*This manual supersedes TM 11-6625-5024P, 29 June 1973.

Table of Contents-Continued

SECTION		Page	Illus
		Figure	
	020502 Crystal calibrator assembly 608D-M- 117.....	53	17
	020503 Generator tube compartment.....	57	18
	020504 Generator tuner compartment	61	19
	02050401 Amplifier coil assembly 608D-60A-PM.....	65	20
	02050402 Oscillator coil assembly 608D-60B(IN-PM).....	67	21
	020505 Generator housing assembly 608D-E- 116.....	69	22
	02050501 Output attenuator assembly 608D-341(N)-PL	73	23
	0206 Bottom plate assembly.....	76	24
03	Cable Assembly, Power, Electrical CX-3136U6FT	77	26
04	Cable assembly, radio frequency 2279.....	79	26
05	Fuseholder MX-1730/U.....	81	27
III.	Special tool list (Not applicable)		
IV.	National stock number number and part number index.....	82	

SECTION I

INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of organizational, direct support and general support maintenance of the AN/USM-44 and ANIUSM-44A. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence. Bulk materials are listed at end of Section II.

b. Section III. Special Tools List. Not applicable.

c. Section IV. National Stock Number and Part Number Index. A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphabetic sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. Illustration This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. Source, Maintenance, and Recoverability (SMR) Codes.

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

Code	Definition
PA	- Item procured and stocked for anticipated or known usage

Code	Definition
XD	- A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

Code	Application/Explanation
O	- Support item is removed, replaced, used at the organizational level.
H	- Support item is removed, replaced, used at the general support level.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code	Application/Explanation
H	-The lowest maintenance level capable of complete repair of the support item is the general support level.
Z	- Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

Recoverability	Code	Definition
Z	- Nonreparable item.	When unserviceable, condemn and dispose at the level indicated in position 3.

Recoverability

	Code	Definition
H	-Reparable item.	When uneconomically repairable, condemn and dispose at the general support level.

c *National Stock Number.* Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d *Part Number.* Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. *Federal Supply Code for Manufacturer (FSCM).* The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f *Description* Indicates the Federal item name and, if required, a minimum description to identify the item.

g. *Unit of Measure (U/M).* Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. *Quantity Incorporated in Unit:* Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.

4. Special Information

a. Usable on codes are shown in the description column. Uncoded items are applicable to all models.

Identification of the usable on codes used in this publication are:

Code	Used on
AM5	AN/USM-44
AM6	AN/USM-44A

b. The following publications pertain to the AN/USM-44 and AN/USM-44A and its components:

- TM 11-6625-508-10, Signal Generators AN/USM-44 and AN/USM-44A
- TM 11-6625-508-25, Signal Generators AN/USM-44 and AN/USM-44A

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second* Find the illustration covering the functional group to which the item belongs.

(3) *Third* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.


(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphanumeric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second* After finding the figure and item number; locate the figure and item number in the repair parts list.


6. Abbreviations

Not applicable.

(Next printed page is 4.1)

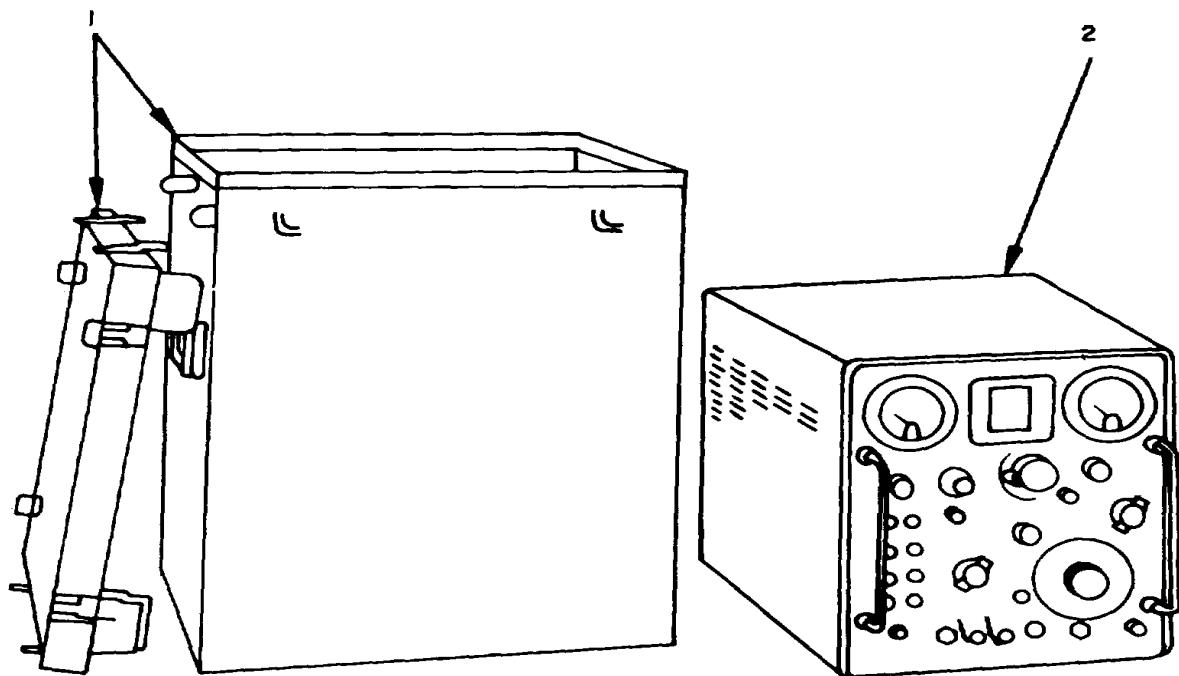


GENERATOR TEST SET AN/USM-44

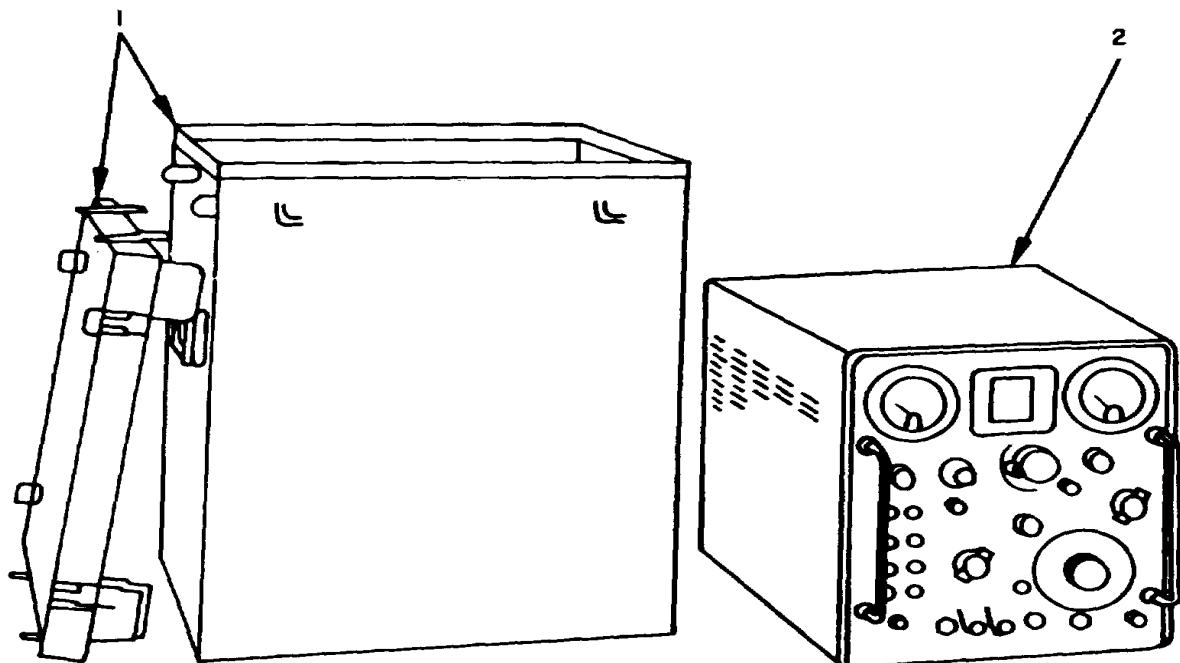

GENERATOR TEST SET AN/USM-44A

EL2CH001

Figure 1. Signal Generator Test Sets AN/USM-44, AN/USM-44A (Sheet 1 of 2).

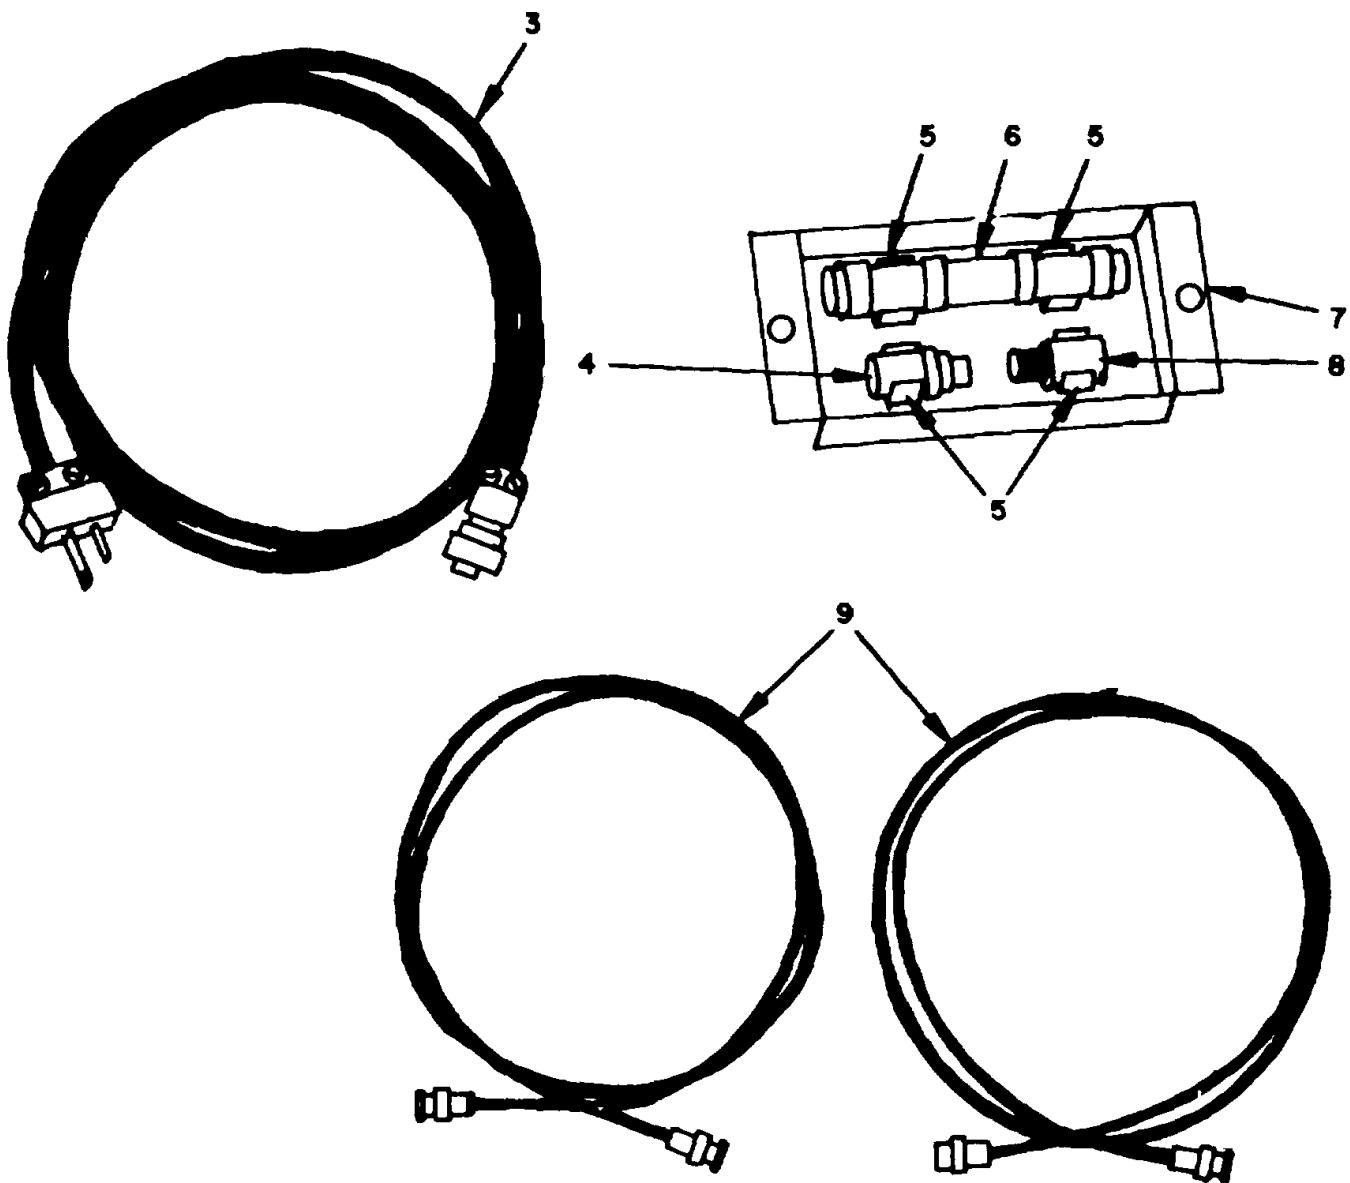**ACCESSORY KIT**


EL2CH002

Figure 1. Signal Generator Test Sets AN/USM-44, AN/USM-44A (Sheet 2 of 2).

SECTION II

TM 11-6625-508-24P


(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE		QTY INC IN UNIT	
						GROUP 00 SIGNAL GENERATOR TEST SETS AN/UMSM-44, AN/USM-44A			
1	1	PAHHH	6625-00-669-3758	CY-1605/USM-44	80058	TRANSIT CASE ASSEMBLY		AM5	EA 1
1	1	PAHHH	6625-00-542-0991	CY-2105/USM-44A	80058	TRANSIT CASE ASSEMBLY		AM6	EA 1
1	2	PAHHH	6625-00-519-1645	TS-510/U	80058	SIGNAL GENERATOR		AM5	EA 1
1	2	XDHHH		TS-S10A/U	80058	SIGNAL GENERATOR		AM6	EA 1
1	3	XDHHH		CX3135/U (6 ft)	80058	CABLE ASSEMBLY,POWER,ELECTRICAL		AM5	EA 1
1	3	XDOHH		2273	02764	CABLE ASSEMBLY, POWER,ELECTRICAL		AM6	EA 1
1	4	PAOZZ	5935-00-732-1919	U34U9BU	80058	ADAPTER, ELECTRICAL CONNECTOR			EA 1
1	5	XDHZZ		21368-1	14655	CLIP, ELECTRICAL		AM5	EA 4
1	5	XDHZZ		2051-2	02764	CLIP,,ELECTRICAL		AM6	EA 4
1	6	PAHZZ	5920-00-732-1919	MX1730U	80058	FUSEHOLDER		AM5	EA 1
1	6	PAHZZ	5920-00-636-0679	2152	66150	FUSEHOLDER		AM6	EA 1
1	7	XDHZZ		608045RNPS	09182	COVER ASSEMBLY		AM5	EA 1
1	7	XDHZZ		2245	02764	COVER ASSEMBLY		AM6	EA 1
1	8	PAHZZ	5935-00-259-0205	UG201AU	80058	ADAPTER.ELECTRICAL CONNECTOR			EA 1
1	9	PAOHH	6660-00-504-2437	CG409/U (4 ft)	80058	CABLE ASSEMBLY, RADIO FREQUENCY		AM5	EA 2
1	9	XDOHH		2429	02764	CABLE ASSEMBLY.RADIO,FREQUENCY		AM6	EA 2

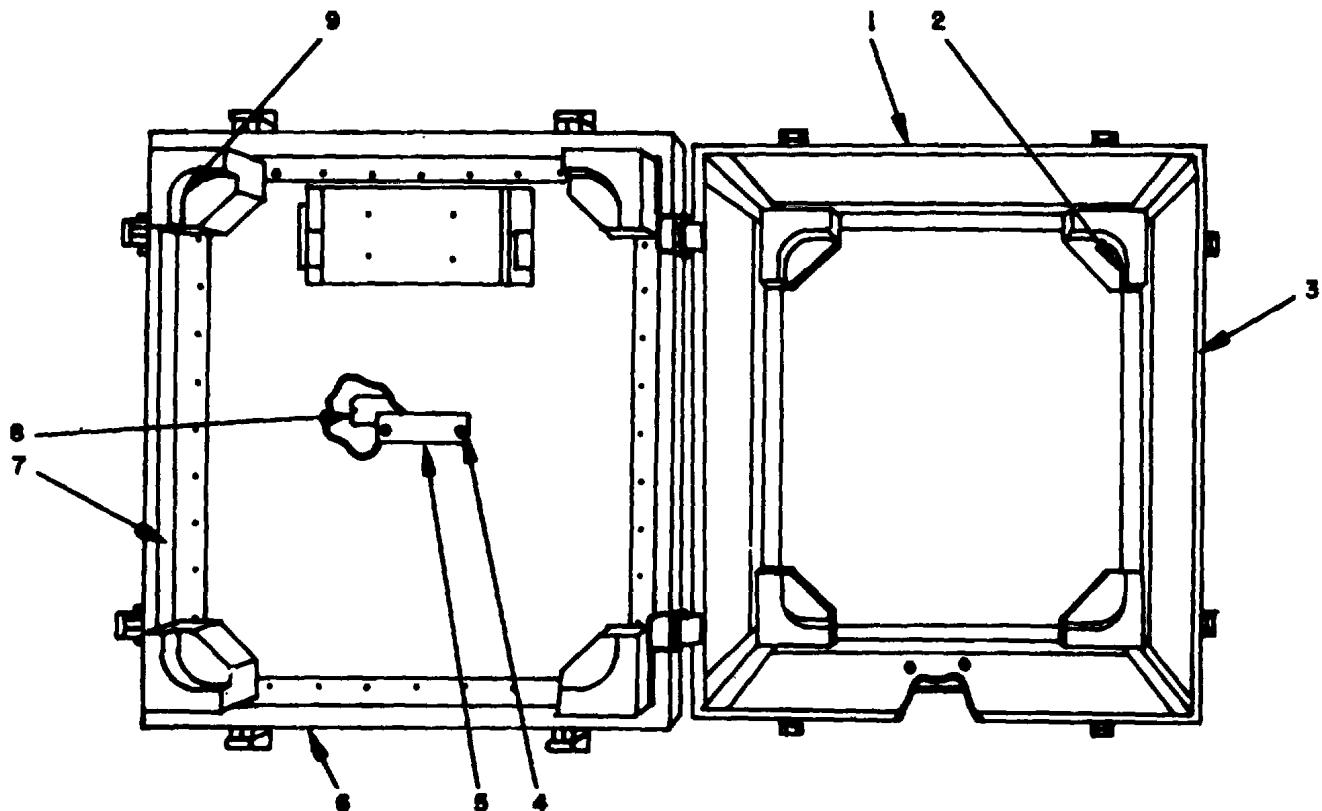

TRANSIT CASE ASSEMBLY AN/USM-44

EL2CH003

Figure 2. Transit Case Assemblies CY-2105A/USM-44A,
CY-1605/USM-44 (Sheet 1 of 2).

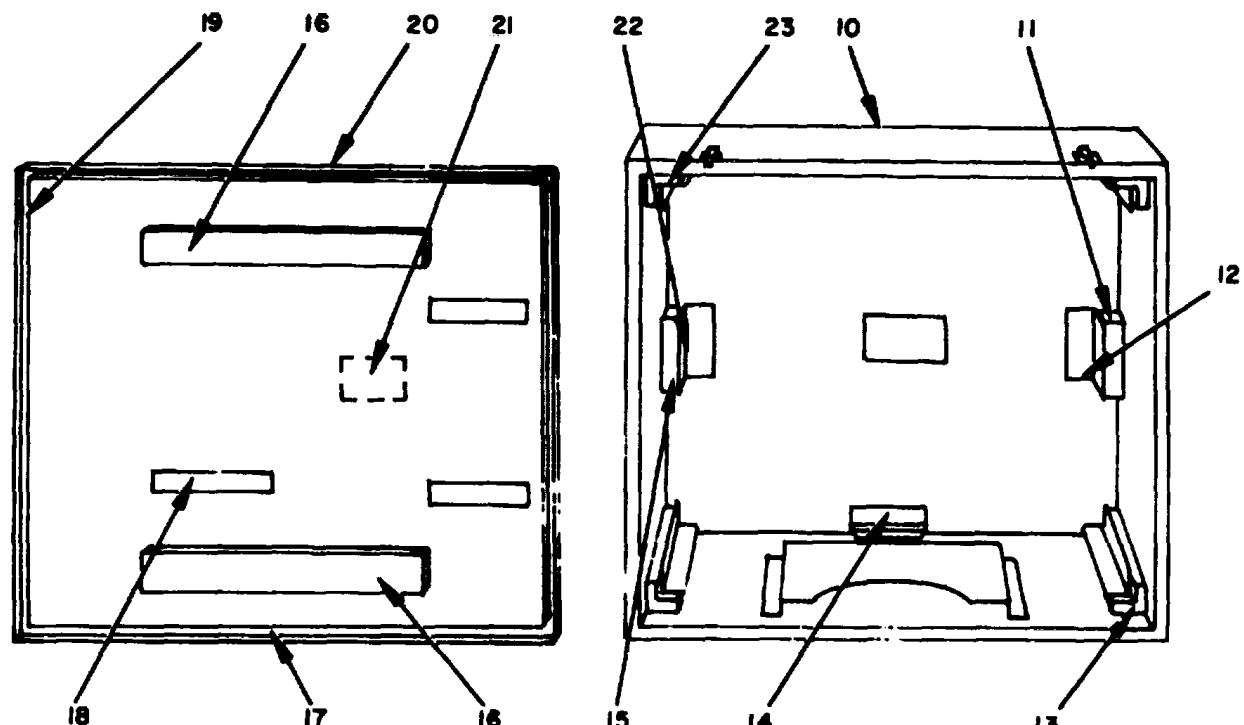


TRANSIT CASE ASSEMBLY AN/USM-44 A

EL2CH004

Figure 2. Transit Case Assemblies CY-2105A/USM-44A, CY-1605/USM-44
(Sheet 2 of 2).

(1) ILLUSTRATION		(2) SMR ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 01 TRANSIT CASE ASSEMBLIES CY-2105A/USM-44A, CY-1605/USM-44		
2	1	XDHZZ	606DE103	09182	TRANSIT CASE, BOTTOM	AM5	EA	1
2	2	XDHZZ	432-35PS	09182	BUMPER, RUBBER BOTTOM	AM5	EA	4
2	3	XDHZZ	432-33PS	09185	GASKET	AM5	EA	1
2	4	XDHZZ	AN545-6-3	88044	SCREW, WOOD	AM5	EA	2
2	5	XDHZZ	712-112NPS	09182	PLATE, IDENTIFICATION	AM5	EA	1
2	6	XDHZZ	608DE104	09182	TRANSIT CASE, TOP	AM5	EA	1
2	7	XDHZZ	432-34PS	09187	GASKET, COVER	AM5	EA	1
2	8	XDHZZ	712-113NPS	09182	PLATE, IDENTIFICATION	AM5	EA	1
2	9	XDHZZ	432-36PS	09182	BUMPER, RUBBER, TOP	AM5	EA	4
2	10	XDHZZ	2188	02764	TRANSIT CASE, BOTTOM	AM5	EA	1
2	11	XDHZZ	2023	02764	BUMPER RUBBER, BOTTOM	AM6	EA	1
2	12	XDHZZ	2474	02764	BLOCK, RUBBER MOUNTING	AM6	EA	1
2	13	XDHZZ	2476	02764	BUMPER, RUBBER SIDE	AM6	EA	2
2	14	XDHZZ	2477	02764	BUMPER, RUBBER, BOTTOM	AM6	EA	2
2	15	XDHZZ	2475	02764	BUMPER, RUBBER, BOTTOM	AM6	EA	1
2	16	XDHZZ	2024	02764	BUMPER, RUBBER,	AM6	EA	2
2	17	XDHZZ	2056-1	09182	GASKET, COVER	AM6	EA	1
2	18	XDHZZ	2159	02764	PLATE.IDENTIFCATION	AM6	EA	1
2	19	XDHZZ	2056-2	09182	GASKET ,COVER	AM6	EA	1
2	20	XDHZZ	2189	02764	TRANSIT CASE, TOP	AM6	EA	1
2	21	XDHZZ	2160	02764	PLATE.IDENTIFCATION	AM6	EA	1
2	22	XDHZZ	2021	02764	BLOCK, RUBBER MOUNTING	AM6	EA	1
2	23	XDHZZ	2043	02764	BUMPER, RUBBER, SIDE	AM6	EA	2

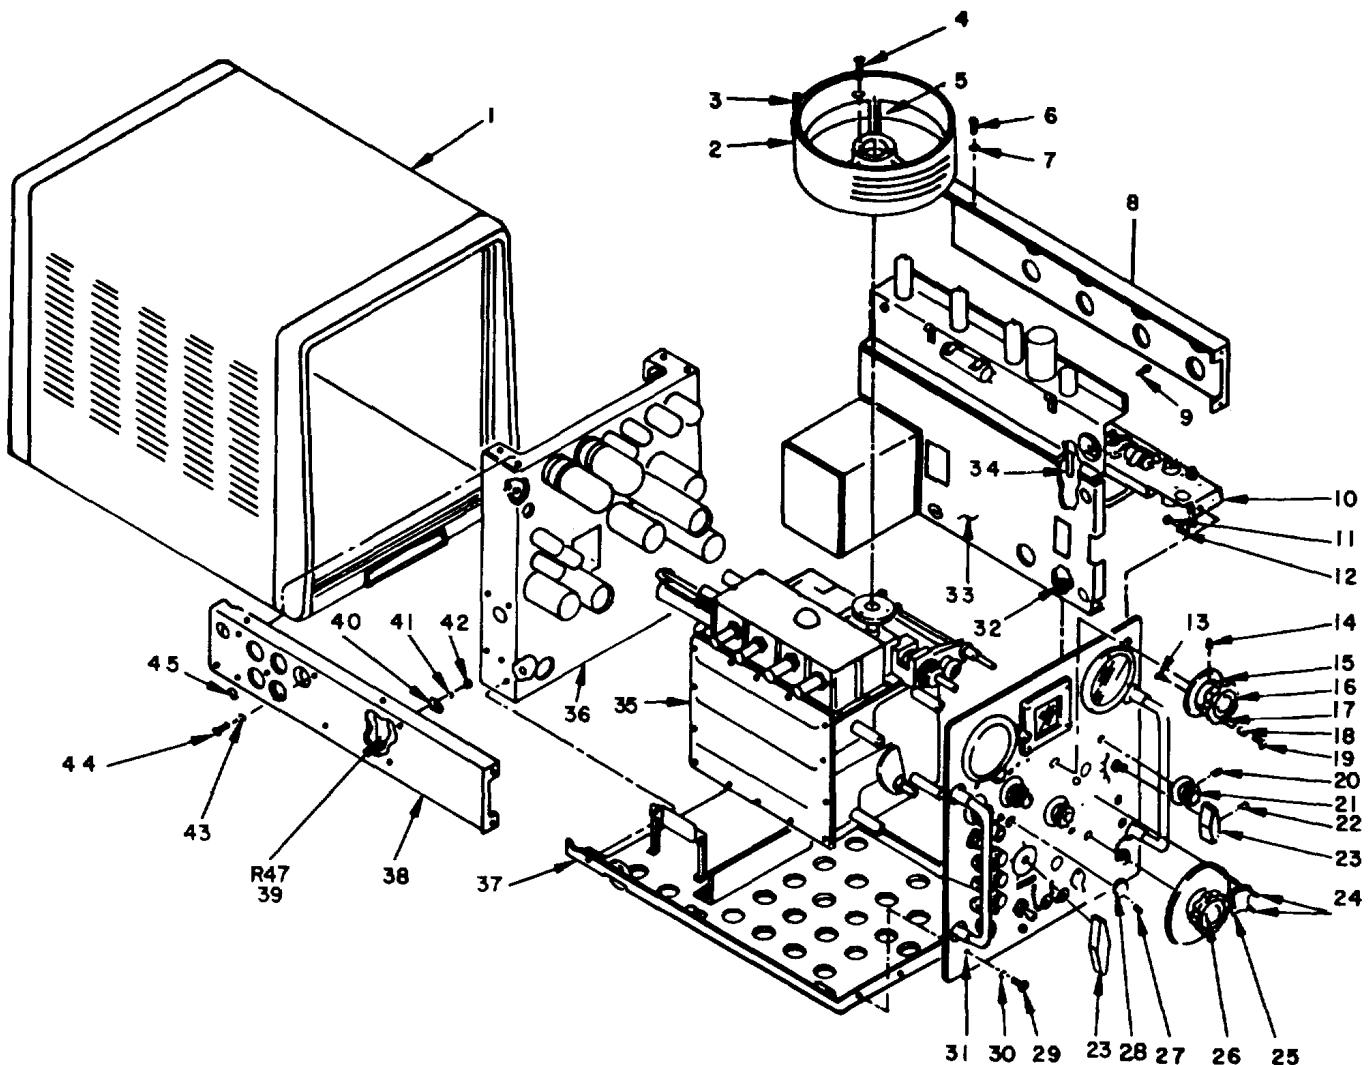


EL2CH005

Figure 3. Signal Generator TS-510/U, TS-510A/U.

(1) ILLUSTRATION		(2) SMR ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE					U/M	
						GROUP 02 SIGNAL GENERATOR TS-510/U TS-510A/U		
3	1	XDHZZ		608D44NPL	09182	CABINET ASSEMBLY	AM5	EA 1
3	1	XDHZZ		2191	09182	CABINET ASSEMBLY	AM6	EA 1
3	2	XDHZZ		608A40APS	09182	BAND, FREQUENCY DIAL	AMS	EA 1
3	2	XDHZZ		2175	09182	BAND, FREQUENCY DIAL	AM6	EA 1
3	3	XDHZZ		608A408PS	09182	CLAMP.DIAL	AMS	EA 1
3	3	XDHZZ		2443	09182	CLAP, DIAL	AM6	EA 1
3	4	XDHZZ		AN515C8-12	88044	SCREW		EA 3
3	S	XDHZZ		608A20CPS	09182	DRUM, DIAL	AM5	EA 1
3	5	XDHZZ		2237	09182	DRUM, DIAL	AM6	EA 1
3	6	XDHZZ		AN15SC8-8	88044	SCREW		EA 12
3	7	XDHZZ		MS3533-89	96906	WASHER		EA 23
3	8	XDHZZ		608D5BPS	09182	SUPPORT, LEFT HAND	AM5	EA 1
3	8	XDHZZ		2234	09182	SUPPORT, LEFT HAND	AM6	EA 1
3	9	XDHZZ		AN515C8-6	88044	SCREW		EA 1
3	10	XDHHH		608DL113	09182	SUB-CHASSIS ASSEMBLY	AM5	EA 1
3	10	XDHHH		2118	09182	SUB-CHASSIS ASSEMBLY	AM6	EA 1
3	11	XDHZZ		MS35649-82	96906	NUT		EA 2
3	12	XDHZZ		M535335-74	96906	WASHER		EA 2
3	13	XDHZZ		AN510-6-4	88044	SCRE		EA 3
3	14	XDOZZ	5355-00-616-7824	AN565A1032H6	88044	SETSCREW		EA 2
3	15	XDHZZ		608D40BPS	09182	DIAL.SCALE	AM5	EA 1
3	15	XDHZZ		2317	09182	DIAL, SCALE	AM6	EA 1
3	16	XDOZZ		G74XPS	09182	KNOB	AM5	EA 1
3	16	XDOZZ		SCH-309-70-BB-EE-X	09182	KNOB N46	AM6	EA 1
3	17	XDHZZ		G74AEPS	09182	CRANK, KNOB	AM5	EA 1
3	18	XDHZZ		608A47CPS	09182	SPACER	AM5	EA 2
3	19	XDHZZ		AN515C8-16	88044	SCREW	AM5	EA 3
3	20	XDOZZ		AN565A1032H3	88044	SETSCREW		EA 2
3	21	XDOZZ		37-11-PS	75376	KNOB	AM5	EA 1
3	21	PAOZZ	5305-00-954-8114	S380-70DDLBB	75376	KNOB	AM6	EA 1
3	22	XDOZZ		AN565A8H3	88044	SETSCREW		EA 4
3	23	XDOZZ		6185714	28480	KNOB	AM5	EA 2
3	23	XDOZZ		46A42256	09182	KNOB	AM6	EA 2
3	24	PAHZZ		MS35215-5	96906	SCREW		EA 2
3	25	XDHZZ		G99CPS	09182	WINDOW, DIAL		EA 1
3	25	XDHZZ		2129	09182	WINDOW, DIAL	AM6	EA 1
3	26	XDHZZ		608D40APS	09182	DIAL, CONTROL	AM5	EA 1


(1) ILLUSTRATION		(2) SMR ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b)	SMR CODE					U/M	
3	26	XDHZZ		2347	09182	DIAL, CONTROL	AM6	EA 1
3	27	XDOZZ		AN565D8H4	88044	SETSCREW	EA	EA 2
3	28	XDOZZ		608074BPS	09182	KNOB	AM5	EA 1
3	28	XDOZZ		5-76-18AHOL	75376	KNOB	AM6	EA 1
3	29	PAHZZ	5305-00-050-9229	MS51957-63	96906	SCREW		EA 9
3	30	PAHZZ	5310-00-019-0672	MS35333-170	96906	WASHER		EA 23
3	31	XDHHH		608DE110	09182	PANEL ASSEMBLY	AM5	EA 1
3	31	XDHHH		2194	09182	PANEL ASSEMBLY	AM6	EA 1
3	32	XDHZZ		MS35335-73	96906	WASHER		EA 1
3	33	XDHHH		608DE112	09182	CHASSIS ASSEMBLY, SIDE	AM5	EA 1
3	33	XDHHH		2196	09182	CHASSIS ASSEMBLY, SIDE	AM6	EA 1
3	34	XDHZZ		608D47KPS	09182	SUPPORT, CHASSIS	AM5	EA 1
3	34	XDHHH		2321	09182	SUPPORT, CHASSIS	A6	EA 1
3	35	XDHHH		608059NPL	09182	GENERATOR ASSEMBLY	A	EA 1
3	35	XDHHH		2193	09182	GENERATOR ASSEMBLY	A6	EA 1
3	36	XDHHH		608DE111	09182	CHASSIS ASSEMBLY	AN5	EA 1
3	36	XDHHH		2195	09182	CHASSIS ASSEMBLY	AM6	EA 1
3	37	XDHHH		608D1BPS	09182	PLATE ASSEMBLY,BOTTOM	ANS	EA 1
3	37	XDHHH		2206	09182	PLATE ASSEMBLY,BOTTOM	AM6	EA 1
3	38	XDHZZ		608D1APS	02764	SUPPORT, RIGHT HAND	AM5	EA 1
3	38	XDHZZ		2233	02764	SUPPORT, RIGHT HAND	AM6	EA 1
3	39	XDHZZ		RW31C632	81349	RESISTOR, FIXED, WIRE WOUND		EA 1
3	40	PAHZZ	5340-00-685-5901	3-8-6	95987	CLAMP, LOOP		EA 2
3	41	XDHZZ		MS35333-88	96906	WASHER		EA 3
3	42	PAHZZ	5310-00-013-4530	MS35649-62	96906	NUT		EA 3
3	43	XDHZZ		AN960C6	88044	WASHER		EA 3
3	44	XDHZZ		AN515C6-8	96906	SCREW		EA 3
3	45	XDHZZ		7503	80112	STRAP., RETAIING	AM5	EA 1
3	45	XDHZZ		1470	80112	STRAP, RETAINING	AM6	EA 1

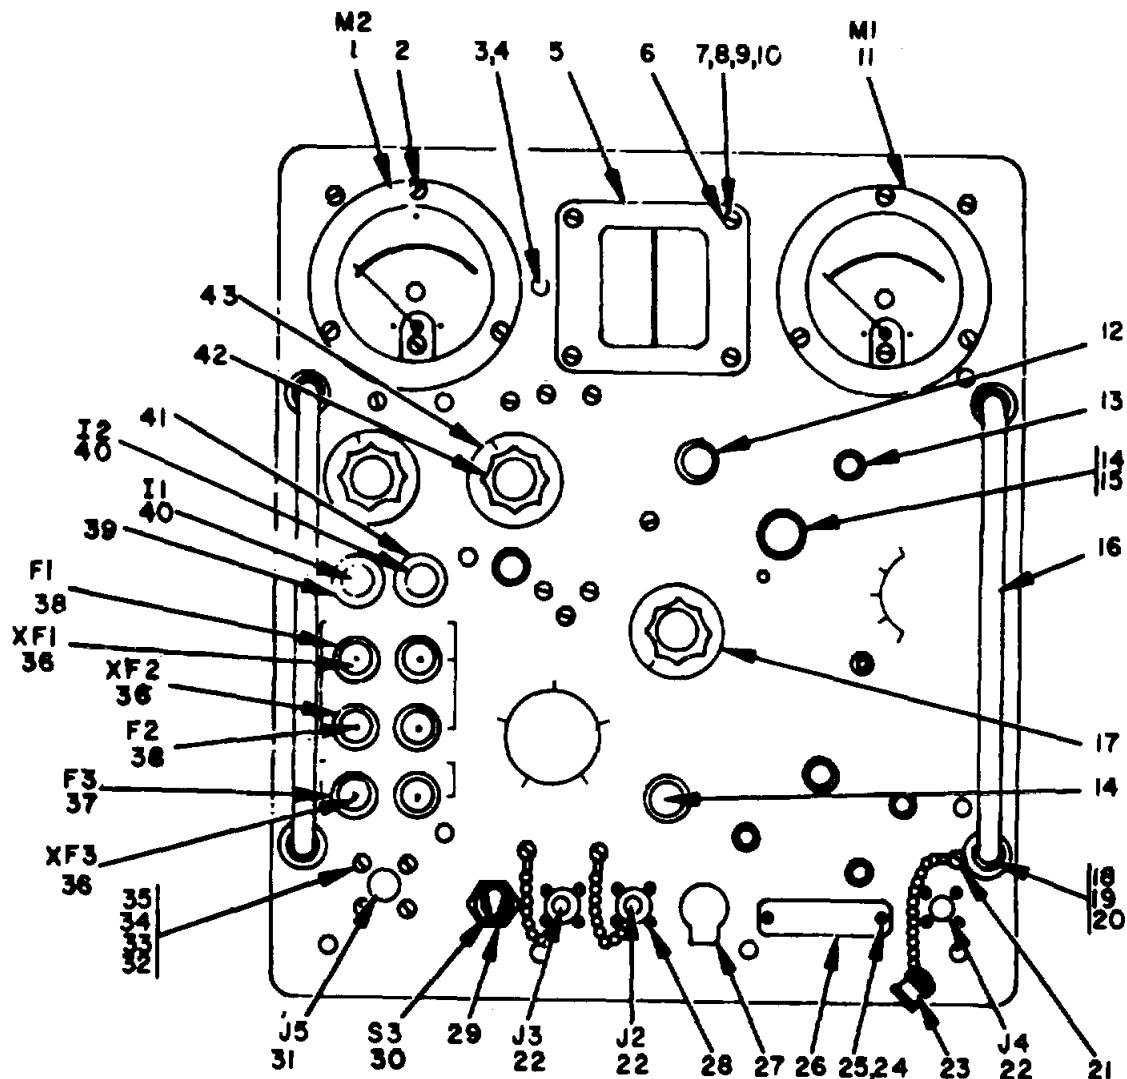

PANEL ASSEMBLY, FRONT VIEW

EL2CH006

Figure 4. Panel Assembly 608D-E-110 (Sheet 1 of 2).

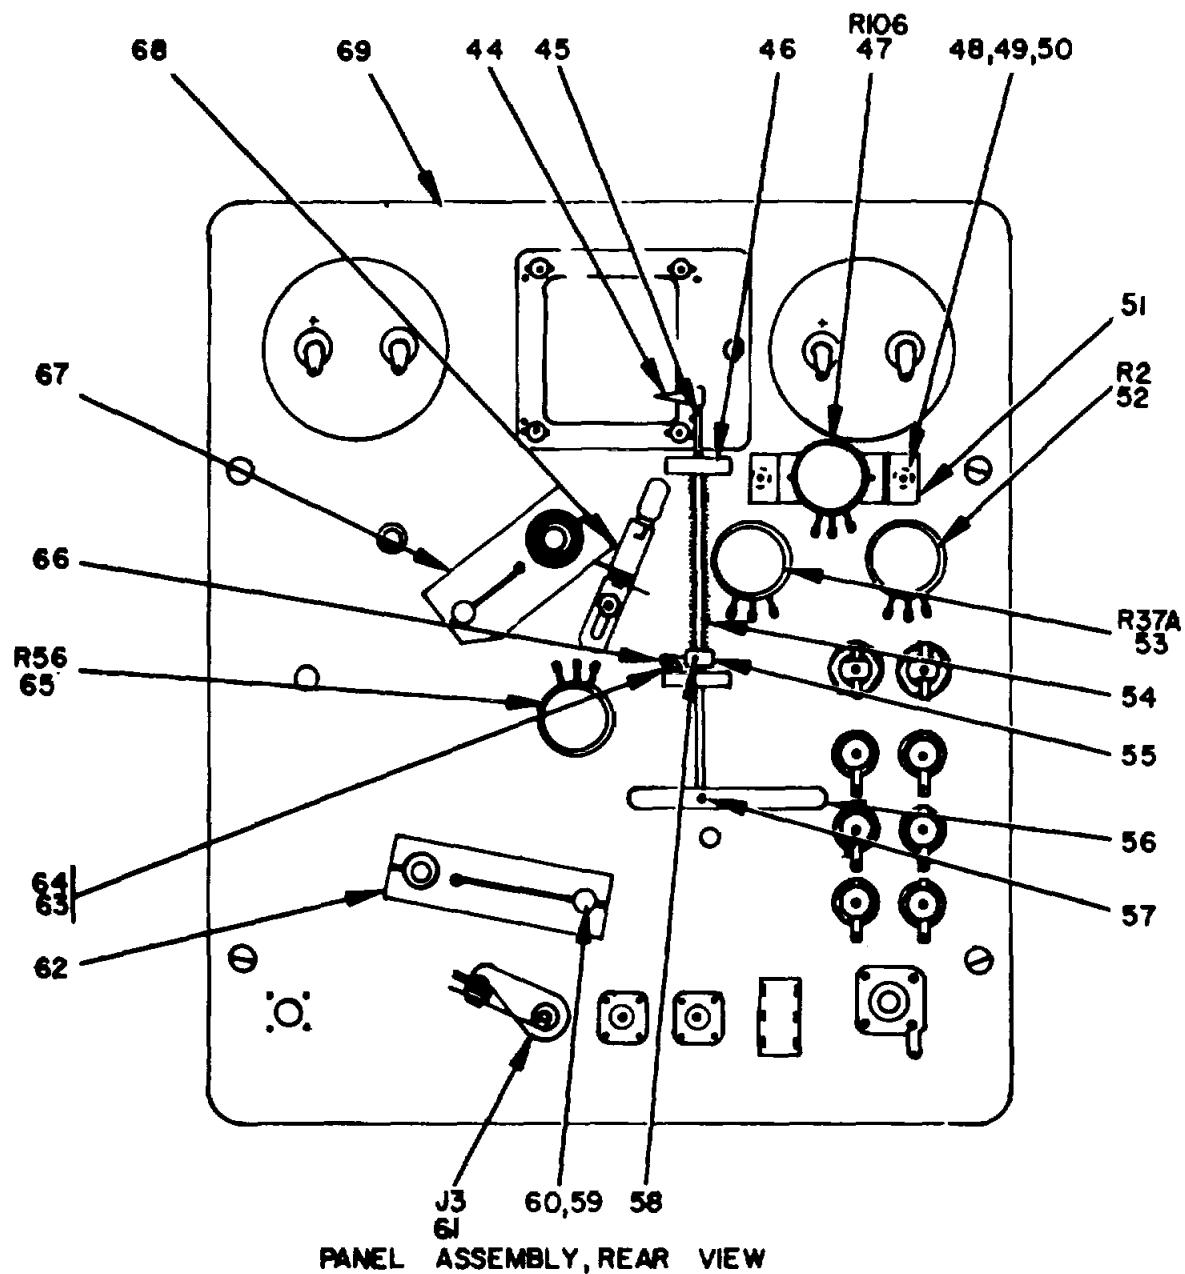


EL2CH007

Figure 4. Panel Assembly 608D-E-110 (Sheet 2 of 2).


(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE		U/M	QTY INC IN UNIT
						GROUP 0201 PANEL ASSEILY 608D-E-110			
4	1	XDHZZ		112-52N	09182	METER, MODULATION		AM5	EA 1
4	1	XDHZZ		2001	09182	METER, MODULATION		AM6	EA 1
4	2	XDHZZ		AN515P86-12	88044	SCREW		EA	6
4	3	XDHZZ		608D17BPS	09182	SHAFT, CURSOR ADJUST		AM5	EA 1
4	3	XDHZZ		2293	09182	SHAFT, CURSOR ADJUST		AM6	EA 1
4	4	XDHZZ		608D47CPS	09182	SPACER.SHAFT		AM5	EA 9
4	4	XDHZZ		2300	09182	SPACER, SHAFT		AM6	EA 5
4	5	XDHZZ		608D83EPS	09182	BEZEL, WINDOW		AM5	EA 1
4	5	XDHZZ		2480	09182	BEZEL, WINDOW		AM6	EA 4
4	6	XDHZZ		AN515PB6R4	88044	SCREW		EA	4
4	7	XDHZZ		2294	09182	SPACER		AM6	EA 4
4		XDHZZ		AN961-6	88044	WASHER		EA	4
4	9	XDHZZ		MS35338-88	96906	WASHER		EA	4
4	10	XDHZZ		MS35649-64	96906	NUT		EA	4
4	11	XDHZZ		112-51N	09182	METER, OUTPUT		AM5	EA 1
4	11	XDHZZ		2000	09182	METER, OUTPUT		AM6	EA 1
4	12	XDHZZ		2103-3	02764	SEAL		AM6	EA 2
4	12	XDHZZ		71A9	73680	SEAL		AN5	EA 2
4	13	XDHZZ		2103-1	02764	SEAL		AM6	EA 3
4	13	XDHZZ		71A2	73680	SEAL		AM5	EA 3
4	14	XDOZZ		37-18PS	09182	KNOB		AM5	EA 2
4	14	XDOZZ		2342	02764	KNOB		AM6	EA 2
4	15	XDOZZ		AN565A8H3	88044	SETSCREW		EA	8
4	16	XDHZZ		608048APS	09182	HANDLE, BOW		AM5	EA 2
4	17	XDOZZ		37-11-PS	75376	KNOB		AM5	EA 2
4	17	PAOZZ	535-0616-7824	S380-70DDLBB	75376	KNOB		AM6	EA 2
4	18	XDNZZ		AN520PB10-8	8044	SCREW		EA	4
4	19	XDHZZ		MS35333-90	96906	WASHER		EA	4
4	20	XDHZZ		61B3ATPS	09182	WASHER, HANDLE		AM5	EA 4
4	20	XDHZZ		2428	02764	WASHER, HANDLE		AM6	EA 4
4	21	XDHZZ		AN515C4-6	88044	SCREW		EA	3
4	22	XDHZZ		RC32GF151K	81349	CONECTOR, RECEPTACLE.ELECTRICAL		EA	3
4	23	XDHZZ		CW123AU	81349	COVER,.ELECTRICAL CONNECTOR		EA	3
4	24	XDHZZ		AN515C4-4	88044	SCREW		EA	2
4	25	XDHZZ		MS35333-70	96906	WASHER		EA	2
4	26	XDHZZ		712-111NPS	09182	PLATE, IDENTIFICATION		AM5	EA 1
4	27	XDHZZ		2158	02764	PLATE, IDENTIFICATION		AM6	EA 1

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE		(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.								
4	27	PAHZZ	5935-00-321-4999	J1301	99813	COVER ,TELEPHONE JACK	AM5	EA	1
4	27	XDHZZ		7235A	96071	COVER, TELEPHONE JACK	AM6	EA	1
4	28	XDHZZ		AN520PB4-6	88044	SCREW		EA	12
4	29	XDHZZ		103EHXSEAL	97539	SEAL		EA	1
4	30	PAHZZ	5930-00-655-1508	MS25100-4	96906	SWITCH, TOGGLE		EA	1
4	31	XDOHZZ		MS3102A10SL3P	96906	CONNECTOR, RECEPTACLE, ELECTRICAL		EA	1
4	32	XDHZZ		AN505PB4-6	88044	SCREW		EA	4
4	33	PAHZZ	5310-00-616-3555	MS35333-71	96906	WASHER		EA	4
4	34	PAHZZ	5940-00-246-2770	2504-04-00	78189	TERMINAL, LUG		EA	1
4	35	XDHZZ		MS35649-44	96906	NUT		EA	4
4	36	PAHZZ	5920-00-556-0144	342003	75915	FUSEHOLDER		EA	3
4	37	PAOZZ	5920-00-043-2641	MS90078-5	96906	FUSE, CARTRIDGE		EA	3
4	38	PAOZZ	5920-00-010-6652	MS90078-12	96906	FUSE, CARTRIDGE		EA	3
4	39	PAHZZ	6210-00-500-1952	8141D-117	96212	LIGHT, INDICATOR		EA	1
4	40	PAOZZ	5960-00-100-7301	47	89730	LAMP INCANDESCENT		EA	2
4	41	PAHZZ	6210-00-964-8340	81410-111	96312	LIGHT, INDICATOR		EA	1
4	42	XDOZZ		608074APS	09182	KNOB	AM5	EA	1
4	42	XDOZZ		S76-188DLM	75376	KNOB	AM6	EA	1
4	43	XDOZZ		212A74APS	09182	KNOB	AM5	EA	1
4	43	XDOZZ		S380-70BBDD	75376	KNOB	AM6	EA	1
4	44	XDHZZ		608D83CPS	09182	CURSOR	AM5	EA	1
4	44	XDHZZ		2295	02764	CURSOR	AM6	EA	1
4	45	XDHZZ		68D83CPS	09182	SHAFT ASSEMBLY	AM5	EA	1
4	45	XDHZZ		2312	02764	SHAFT ASSEBLY	AM6	EA	1
4	46	XDHZZ		608D12EPS	09182	SUPPORT, SHAFT	AM5	EA	2
4	46	XDHZZ		2298	02764	SUPPORT, SHAFT	AM6	EA	2
4	47	PAHZZ	5905-00-556-3350	RV4ATRD203C	81349	RESISTOR, VARIABLE		EA	1
4	48	XDHIZZ		AN520PB6-8	88044	SCREW		EA	2
4	49	XDHZZ		MS35335-72	96906	WASHER		EA	3
4	50	PAHZZ	5310-00-013-4530	MS35649-62	96906	NUT		EA	3
4	51	XDHZZ		M98PS	09182	BRACKET, RESISTOR	AM5	EA	1
4	51	XDHZZ		2123	02764	BRACKET, RESISTOR	AM6	EA	1
4	52	XDNZZ		RV4ATRD203C	81349	RESISTOR, VARAIBLE		EA	1
4	53	PAHZZ	5905-00-549-3944	CTSCW10242	71450	RESISTOR, VARIABLE	AM6	EA	1
4	53	XDHZZ		210-71N	09182	RESISTOR, VARIABLE	AM5	EA	1
4	54	XOHZZ		60BA99GPS	09182	SPRING	AM5	EA	1
4	54	XDHZZ		2143	02764	SPRING	AM6	EA	1
4	55	XWIZZ		608D47EPS	09182	COLLM, SHAT	AM5	EA	1
4	55	XO4ZZ		2296	02764	COLLAR, SHAFT	AM6	EA	1

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.							
4	56	XDHZZ		608D99APS	09182	ARM, INDICATOR	AM5	EA 1
4	56	XDHZZ		2299	02764	ARM, INDICATOR	AM6	EA 1
4	57	XDHZZ		AN565D6H2	88044	SETSCREW	EA	1
4	58	XDHZZ		AN565D6H2	88044	SETSCREW	EA	1
4	59	XDHZZ		608D37CNPS	09182	SHAFT, DIAL LOCK	AM5	EA 1
4	59	XDHZZ		2286	02764	SHAFT, DIAL LOCK	AM5	EA 1
4	60	XDHZZ		608D17AMPS	09182	BUSHING, DIAL LOCK	AM5	EA 1
4	60	XDHZZ		2285	02764	BUSHING, DIAL LOCK	AM6	EA 1
4	61	XDHZZ		124-11N	09182	JACK, TELEPHONE	AM5	EA 1
4	61	XDHZZ		2065	02764	JACK, TELEPHONE	AM6	EA 1
4	62	XDHZZ		608D12DNPS	09182	CLAMP, DIAL LOCK	AM5	EA 1
4	62	XDHZZ		2288	02764	CLAMP, DIAL LOCK	AM6	EA 1
4	63	XDHZZ		ANS515C8-5	88044	SCREW	EA	1
4	64	XDHZZ		MS35333-89	96906	WASHER	EA	1
4	6	XDHZZ		RV4ATRD1030	81349	RESISTOR, VARIABLE	EA	1
4	6	XDHZZ		2094-8	02764	CLAMP, LOOP	AM6	EA 1
4	66	XDHZZ		7503	80112	CLAMP, LOOP	AM5	EA 1
4	67	XDHZZ		608D12CNPS	09182	CLAMP, DIAL LOCK	AM5	EA 1
4	67	XDHZZ		2287	02764	CLAMP, DIAL LOCK	AM6	EA 1
4	68	XDHZZ		LH22XXO	09182	LAMPHOLDER	AM5	EA 1
4	68	XDHZZ		706	95263	LAMPHOLDER	AM6	EA 1
4	69	XDHZZ		608D2NPS	9182	PANEL, FRONT	AM5	EA 1
4	69	XDHZZ		2225	02764	PANEL., FRONT	AM6	EA 1

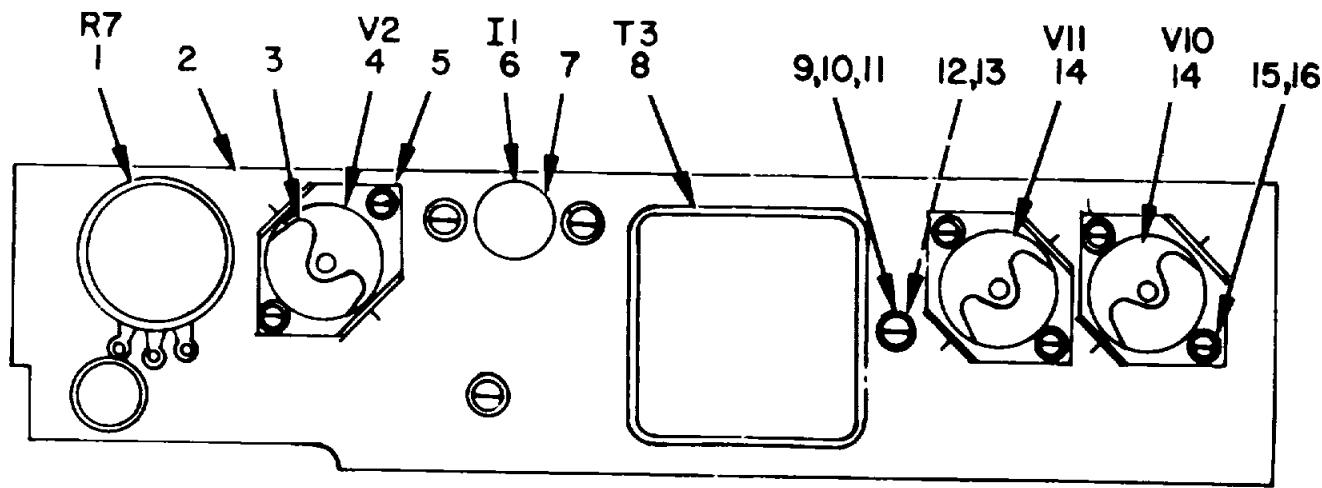

BOTTOM VIEW

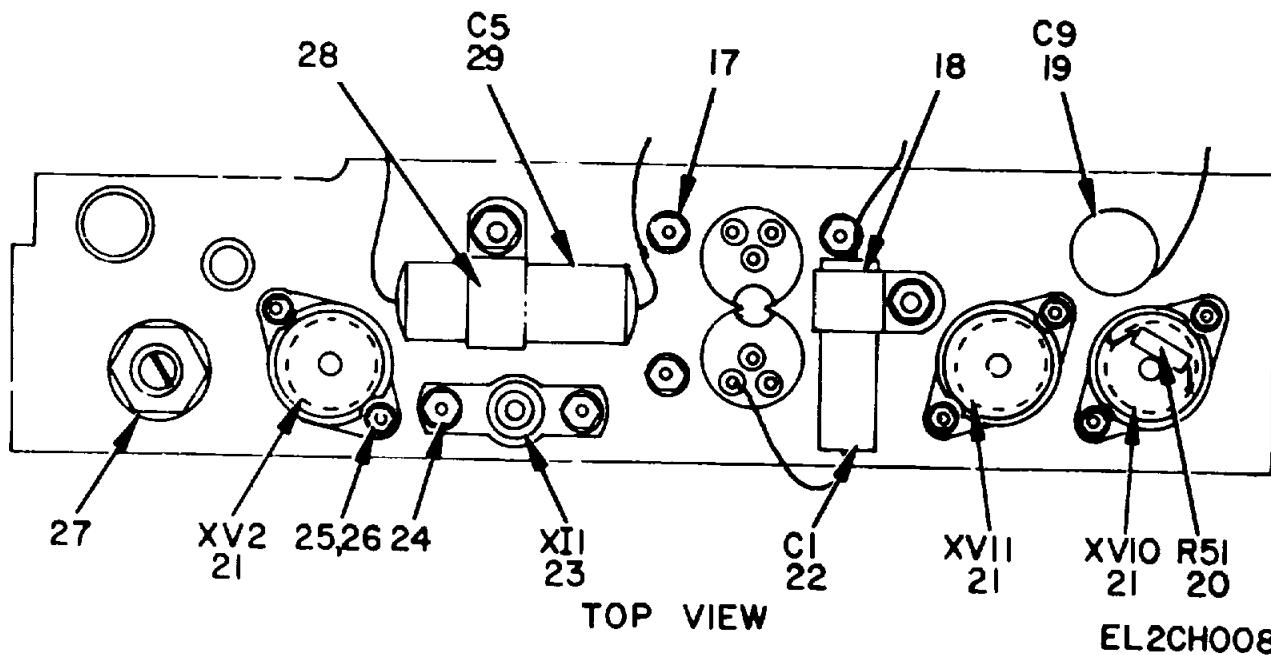

TOP VIEW


EL2CH008

Figure 5. Sub-Chassis Assembly 608D-L-113.

SECTION II

TM 11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	
						GROUP 0202 SUB-CHASSIS ASSEIBLY 608D-L-113		
5	1	XDHZZ	5960-00-166-7663	RV4ATSA152A	81349	RESISTOR, VARIABLE	AM5	1
5	2	XDHZZ		608D1CPS	09182	CHASSIS, ELECTRICAL EQUIPMENT		1
5	2	XDHZZ		2223	02764	CHASSIS, ELECTRICAL EQUIPMENT		1
5	3	XDHZZ		G12CNPS	09182	RETAINER, ELECTRON TUBE		3
5	3	XDHZZ		101W	0282	RETAINER.ELECTIN TUBE		3
5	4	PAOZZ		12AU7	81349	ELECTRON TUBE		1
5	5	XDHZZ		G12FPS	09182	BASE, RETAINER		3
5	5	XDHZZ		102B	02820	BASE, RETAINER		3
5	6	XDHZZ		356-5	08108	LAMP, INCANDESCENT		1
5	7	XDHZZ		G1PS	09182	RETAINER, LAMP		1
5	8	XDHZZ		912-40	02764	TRANSFORMER, AUDIO FREQUENCY	AM5	1
5	8	XDHZZ		2032	02764	TRANSFORMER, AUDIO FREQUENCY		1
5	9	XDHZZ		AN520C6-8	84044	SCREW	AM6	2
5	10	XDHZZ		MS35333-88	96906	WASHER		4
5	11	XDHZZ		MS35335-72	96906	WASHER	EA	4
5	12	XDHZZ		AN961-6	88044	WASHER		2
5	13	PAHZZ	5310-00-013-4530	MS35649-62	96906	NUT	EA	8
5	14	PAOZZ	5960-00-179-4446	12AT7WC	81349	ELECTRON TUBE		2
5	15	XDHZZ	MS35333-87	96906	WASHER	EA	6	
5	16	XDHZZ	AN515C4-6	88044	SCREW		6	
5	17	PAHZZ	5310-00-543-2739	MS35333-72	96906	WASHER	EA	4
5	18	PAHZZ	5340-00--584-6133	7-16-6R	95987	CLAMP, LOOP		1
5	19	XDHZZ	CK63Y103Z	81349	CAPACITOR, FIXED, CERAMIC DIELECTRIC	EA	1	
5	20	PAHZZ	5905-00-192-3987	RC20GF104K	81349		RESISTOR, FIXED, COMPOSITION	1
5	21	XDHZZ	BR377PHSPTD	09182	SOCKET, ELECTRON TUBE	EA	3	
5	22	PAHZZ	5910-00-07-5570	CPO5A1KE104K3	81349		CAPACITOR, FIXED, PAPER DIELECTRIC	1
5	23	PAHZZ	6250-00-295-1614	1698	72765	LAMPHOLDER	EA	1
5	24	XDHZZ	AN515C6-6	88044	SCREW	2		
5	25	XDHZZ	MS35333-71	96096	WASHER	EA	6	
5	26	XDHZZ	MS35469-42	96906	NUT		6	
5	27	PAHZZ	5355-00-156-6559	1510	88245	SHAFT LOCK, .ELECTRONIC COMPONENT	EA	1
5	28	XDHZZ	9-16-6R	95987	CLAMP, LOOP	1		
5	29	PAHZZ	5910-00-822-2579	CP05A1KE2243	81349	CAPACITOR, FIXED.PAPER DIELECTRIC	EA	1

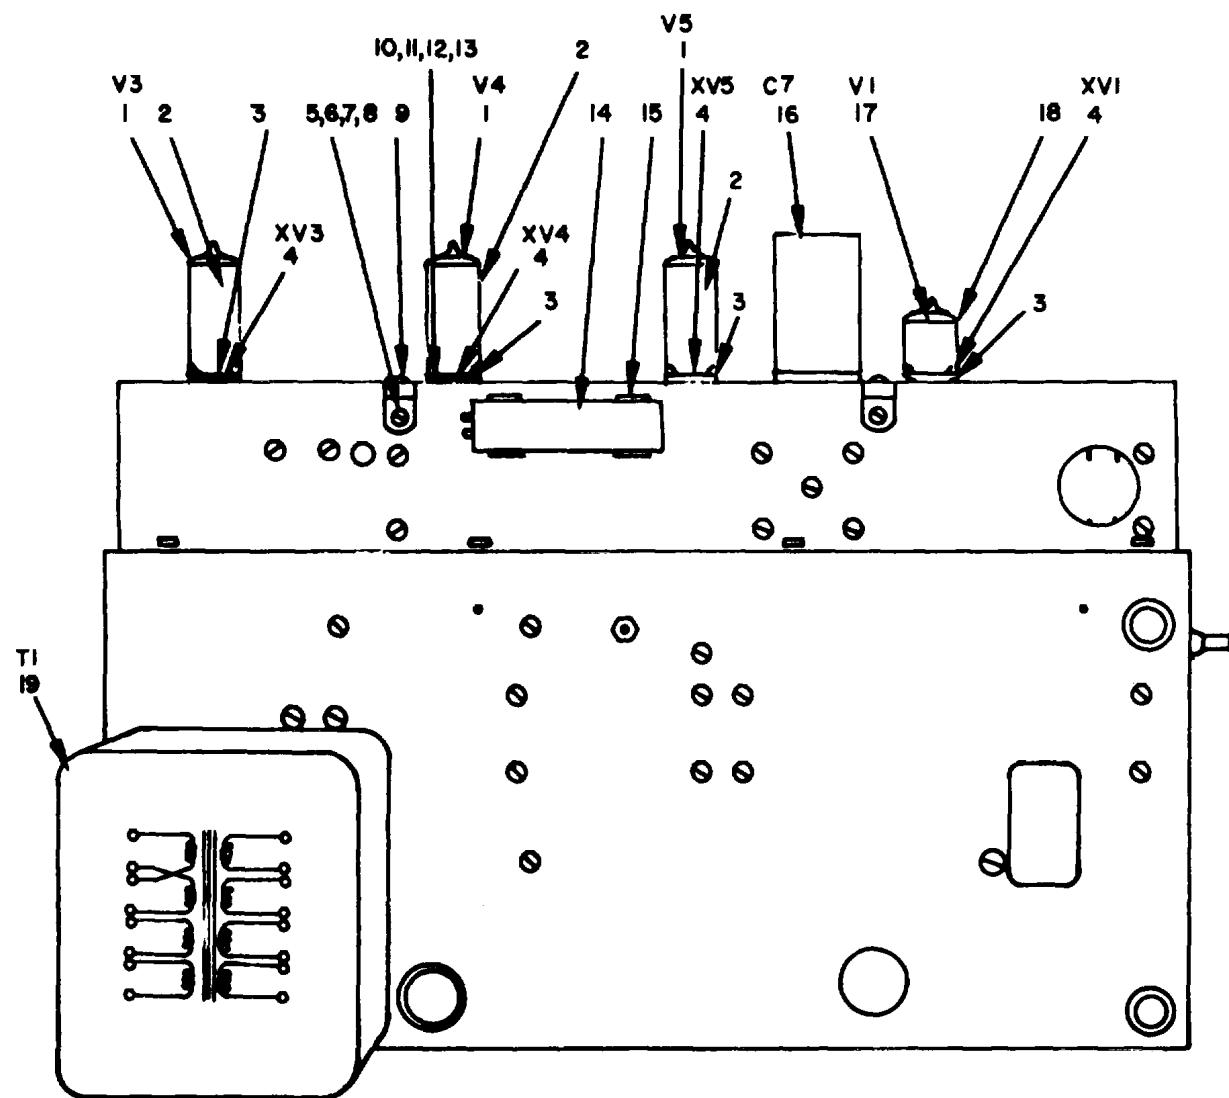

CHASSIS ASSEMBLY, TOP VIEW

EL2CH009

Figure 6. Chassis Assembly 608D-E-112 (Sheet 1 of 2).


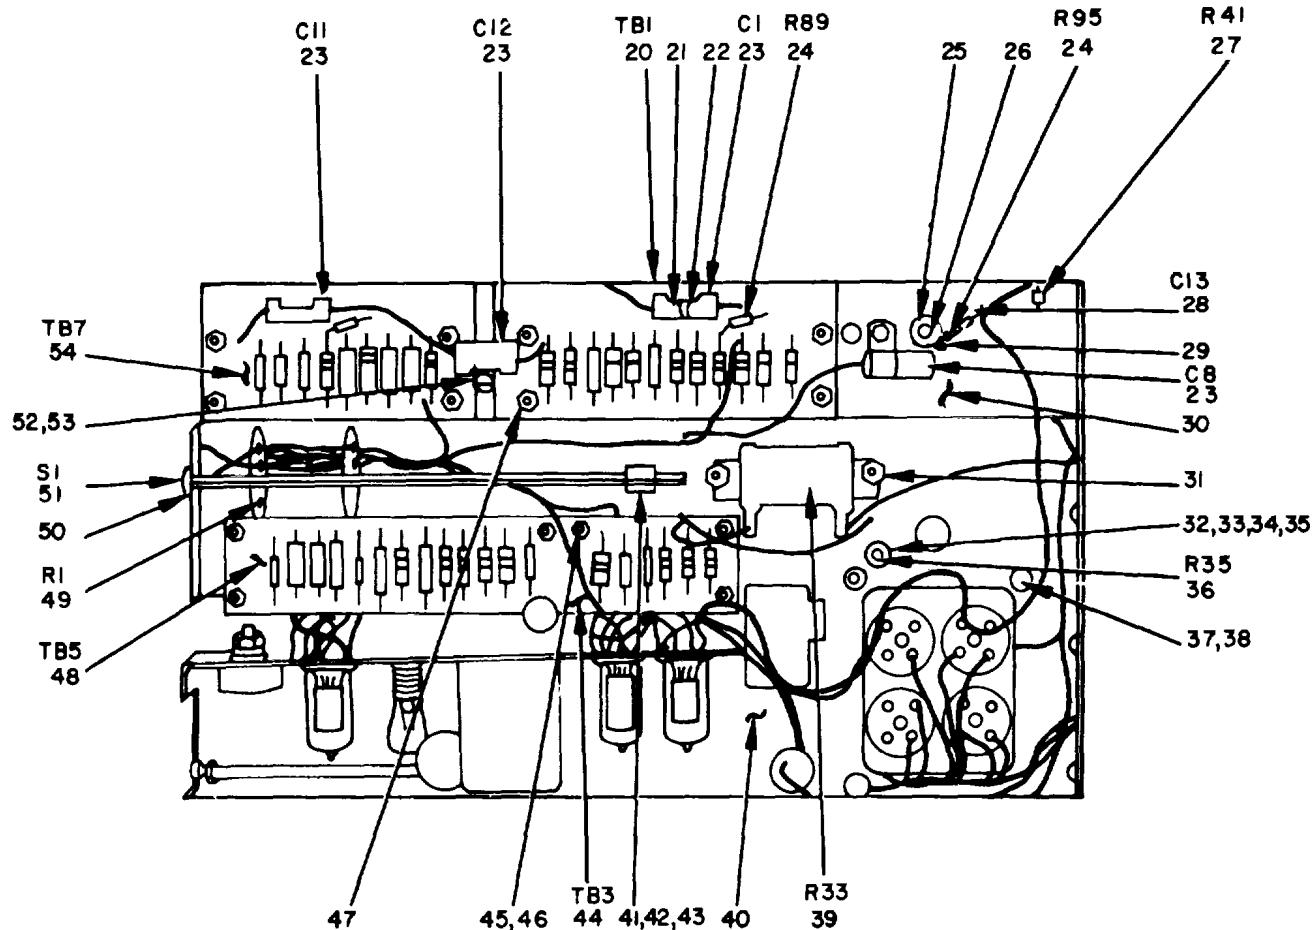


Figure 6. Chassis Assembly 608D-E-112 (Sheet 2 of 2).

EL2CH010

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.							
						GROUP 0203 CHASSIS ASSEYLY 608D-E-112		
6	1	PAOZZ	5960-00-615-0243	6CL6	81349	ELECTRON TUBE	EA	3
6	2	XDHZZ		612PNPS	09182	RETAINER, ELECTRON TUBE	AM5	3
6	2	XDHZZ		103W	09182	RETAINER, ELECTRON TUBE	AM6	3
6	3	XDHZZ		G12FPS	09182	BASE	AM5	4
6	3	XDHZZ		102B	02820	BASE	AM6	4
6	4	XDHZZ		BR377PHSPTD	09182	SOCKET, ELECTRON TUBE	EA	4
6	5	XDHZZ		A515C6-8	88044	SCREW	EA	2
6	6	XDHZZ		MS35333-88	96906	WASHER	EA	22
6	7	XDHZZ		AN960C6	88044	WASHER	EA	22
6	8	PAHZZ	5310-00-013-4530	NS35649-62	96906	NUT	EA	24
6	9	XDHZZ		1-4-6R	95987	CLAMP, LOOP	EA	2
6	10	XDHZZ		ANS15PB4-6	88044	SCREW	EA	8
6	11	XDHZZ		MS35333-87	96906	WASHER	EA	8
6	12	XDHZZ		MS35335-71	96906	WASHER	EA	8
6	13	PAHZZ	5310-00-722-5284	MS35649-42	96906	NUT	EA	8
6	14	XDOZZ		612A38APS	09182	WRENCH, TUBE	AM5	1
6	14	XDOZZ		2003	02764	WRENCH, TUBE	AM6	1
6	15	XDHZZ		21368-1	14655	CLIP, ELECTRICAL	AM5	2
6	15	XDHZZ		2005	02764	CLIP, ELECTRICAL	AM6	2
6	16	XDHZZ		CE42F100R	81349	CAPACITOR, FIXED.PAPER DIELECTRIC	EA	1
6	17	PAOZZ	5960-00-188-6584	5670	81349	ELECTRON TUBE	EA	1
6	18	XDHZZ		G12CNPS	09182	RETAINER.ELECTRON TUBE	AM5	1
6	18	XDHZZ		101W	02820	RETAINER.ELECTRON TUBE	AM6	1
6	19	XOHZZ		910-110W	09182	TRANSFORMER, POWER, STEP, DOWN	AM5	1
6	19	XDHZZ		2045	02764	TRANSFORMER, POWER, STEP DOWN	AM6	1
6	20	XDHHH		608D75S2PM	09182	TERMINAL, BOARD, ASSEMBLY	AN5	1
6	20	XDHHH		2263	09182	TEFINAL, BOARD, ASSEMBLY	AM6	1
6	21	XDHZZ		AN515C6-6	88044	SCREW	EA	4
6	22	PAHZZ	5340-00-584-6133	7-16-6R	959f7	CLAMP, LOOP	EA	4
6	23	PAHZZ	5910-00-807-5570	CPO5A1KE104K3	81349	CAPACITOR, FIXED, PAPER DIELECTRIC	EA	4
6	24	PAHZZ	5905-00-104-8345	RCR20G560JS	81349	RESISTOR, FIXED.COMPOSITION	EA	2
6	25	XDHZZ		1023-04-3-4	72656	INSULATOR, STANDOFF	AM5	1
6	25	XDHZZ		2017	02764	INSULATOR, STANOFF	AM6	1
6	26	XDHZZ		2486-2	02764	WASHER, NONMETALLIC	AM6	2
6	26	XDHZZ		COML	09182	WASHER, NONMETALLIC	AM5	2
6	27	PAHZZ	5905-00-256-0410	RC20GF181K	81349	RESISTOR, FIXED, COPOSITION	EA	1
6	28	PAHZZ	5910-00-984-8373	CN15FD101GP3	81349	CAPACITOR, FIXED, MICA DIELECTRIC	EA	1
6	29	PAHZZ	5940-00-511-8194	2504-06-00	78189	TERMINAL, LUG	EA	2

(1) ILLUSTRATION (a) (b)		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
6	30			680D1UPS	09182	CHASSIS, SIDE, UPPER	AM5	EA 1
6	30	XDHZZ		2204	02764	CHASSIS, SIDE, UPPER	AM6	EA 1
6	31	XDHZZ		2478-1	02764	SPACER	AM6	EA 2
6	32	XDHZZ		AM515C8-40	88044	SCREW		EA 1
6	33	PAHZZ	5970-00-224-8009	929	63743	WASHER	AM5	EA 2
6	33	XDHZZ		2487	02764	WASHER	AM6	EA 2
6	34	XDHZZ		AN960C10	88044	WASHER		EA 1
6	35	XDHHZ		MS35335-73	96906	WASHER		EA 1
6	36	PAHZZ	5905-00-898-9007	RW32V752	81349	RESISTOR, FIXED, WIRE WOUND		EA 1
6	37	PAHZZ	5310-00-761-6882	MS35690-402	96906	NUT		EA 4
6	38	XDHZZ		MS35335-75	96906	WAR		EA 4
6	39	XDHZZ		RW21G153	81349	RESISTOR, FIXED, WIRE WOUND		EA 1
6	40	XDHZZ		608D1SPS	09182	CHASSIS, SIDE, LOWER	AM5	EA 1
6	40	XDHZZ		2205	02764	CHASSIS, SIDE, LOWER	AM6	EA 1
6	41	XDHZZ		AN515C8-8	88044	SCREW		EA 5
6	42	XDHZZ		MS35333-89	96906	WASHER		EA 4
6	43	XDHZZ		MS35649-82	96906	NUT		EA 6
6	44	XDHHH		608075S4PM	09182	TERMINAL, BOARD ASSEMBLY	AM5	EA 1
6	44	XDHHH		2265	09182	TERMINAL, BOARD ASSEMBLY	AM6	EA 1
6	45	XDHZZ		AN515C6-12	88044	SCREW		EA 12
6	46	XDHZZ		MS35335-72	96906	WASHER		EA 21
6	47	PAHZZ	5310-00-543-2739	MS35333-72	96906	WASHER		EA 4
6	48	XDHHH		608D75S3PM	09182	TERMINAL BOARD ASSEMBLY	AM5	EA 1
6	48	XDHHH		2264	02764	TERMINAL BOARD ASSEMBLY	AM6	EA 1
6	49	PAHZZ	5905-00-484-0277	RCR32G303JS	81349	RESISTOR, FIXED, COMPOSITION		EA 1
6	50	XDHZZ		MS35333-93	96906	WASHER		EA 1
6	51	XDHZZ		310-138N	28480	SWITCH, ROTARY	AM5	EA 1
6	51	XDHZZ		2184	02764	SWITCH, ROTARY	AM6	EA 1
6	52	XDHZZ		525A-1t	09182	BRACKET, DECK	AM5	EA 1
6	52	XDHZZ		2120	02764	BRACKET, DECK	AM6	EA 1
6	53	XDHZZ		AN515C6-4	88044	SCREW		EA 3
6	U4	XDHHH		6007551IP	09182	TERMINAL BOARD ASSEMBLY	AM5	EA 1
6	54	XDHHH		2262	09182	TERMINAL BOARD ASSEMBLY	AM6	EA 1

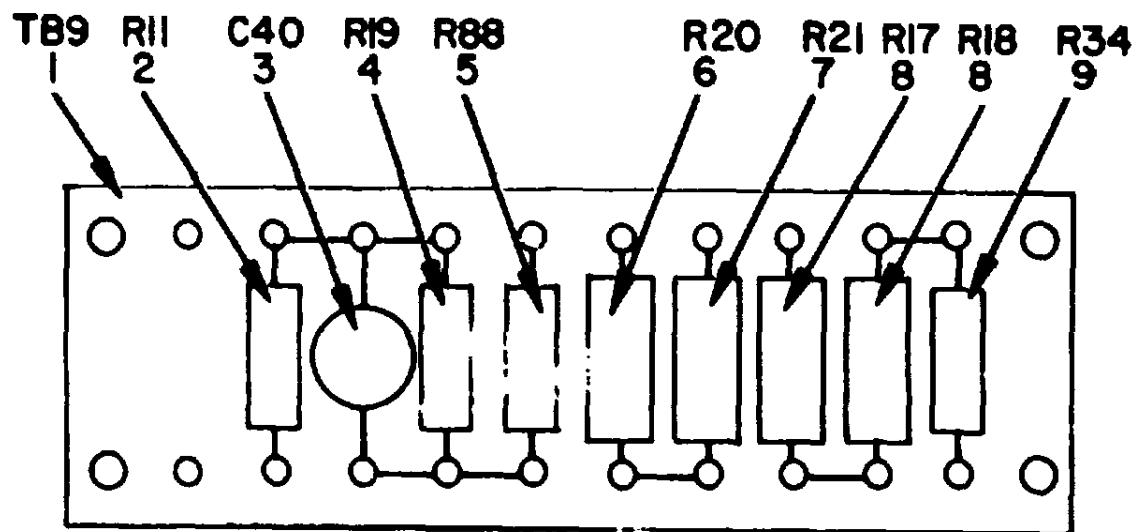

EL2CH011

Figure 7. Terminal Board Assembly 608D-75S-1-PM.

SECTION II

TM 11-6625-508-24P

(1) ILLUSTRATION		(2)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION		(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE				USABLE ON CODE		U/M	
						GROUP 020301 TERMINAL BOARD ASSEMBLY 608D-75S-1-PM			
7	1	XDHZZ		M93-41-2PS	09182	TERMINAL BOARD	AM5	EA	1
7	1	XDHZZ		2127	02764	TERMINAL BOARD	AM6	EA	1
7	2	XDHZZ		RC32LF10SK	81349	RESISTOR, FIXED, COMPOSITION		EA	1
7	3	XDHZZ		CK63Y103Z	09182	CAPACITOR, FIXED, CERAMIC DIELECTRIC		EA	1
7	3	PAHZZ	5910-00-280-6451	BPD. 01	96095	AM6	CAPACITOR, FIXED, CERAMIC DIELECTRIC		
7		PAHZZ	5905-00-106-9346	RCR32G103JS	81349	AM5	RESISTOR, FIXED, COMPOSITION	EA	1
7	5	PAHZZ	5905-00-299-1994	RCR32G474JS	81349	RESISTOR, FIXED, COMPOSITION		EA	1
7	6	PAHZZ	5905-00-111-8372	RCR32G222JS	81349	RESISTOR, FIXED, COMPOSITION		EA	1
7	7	PAHZZ	5905-00-136-8338	RCR32G183JS	81349	RESISTOR, FIXED, COMPOSITION		EA	1
7	8	PAHZZ	5905-00-192-4504	RC42GF822J	81349	RESISTOR, FIXED, COMPOSITION		EA	2
7	9	PAHZZ	5905-00-254-7112	RC42F124K	81349	RESISTOR, FIXED, COMPOSITION		EA	1
					27				

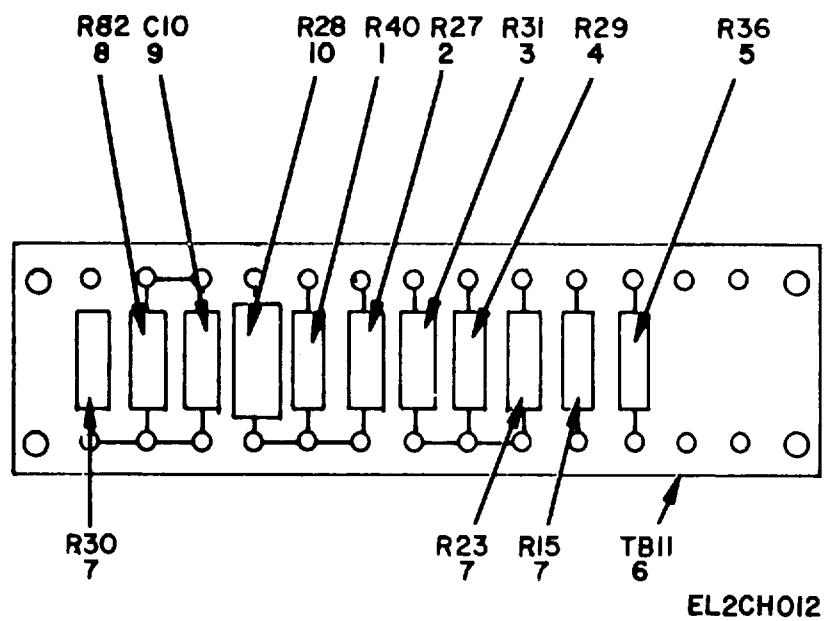


Figure 8. Terminal Board Assembly 608D-75S-2-PM.

SECTION II

TM 11-6625-508-24P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 020302 TERMINAL BOARD ASSEMBLY 608D-75S-2-PM		
8	1	XDHZZ		RC32GF184K	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	2	XDHZZ		RS5-5000	81349	RESISTOR, FIXED, WIRE, WOUND	EA	1
8	3	XDHZZ		RC32GF564K	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	4	PAHZZ	5905-00-249-3642	RC42GF393J	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	5	PAHZZ	5904-00-299-2055	RC32GF181K	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	6	XDHZZ		M93-5-5-8PS	09182	TERMINAL BOARD	AM5	1
8	6	XDHZZ		2448	02764	TERMINAL BOARD	AM6	1
8	7	PAHZZ	5905-00-299-1994	RC32GF474K	81349	RESISTOR, FIXED, COMPOSITION	EA	3
8	8	PAHZZ	5905-00-228-6088	RC32G331JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	9	XDHZZ		CM20D391J	81349	CAPACITOR, FIXED, MICA DIELECTRIC	EA	1
8	10	PAHZZ	5905--00-279-2527	RC42GF223K	81349	RESISTOR, FIXED, .COMPOSITION	EA	1
					29			

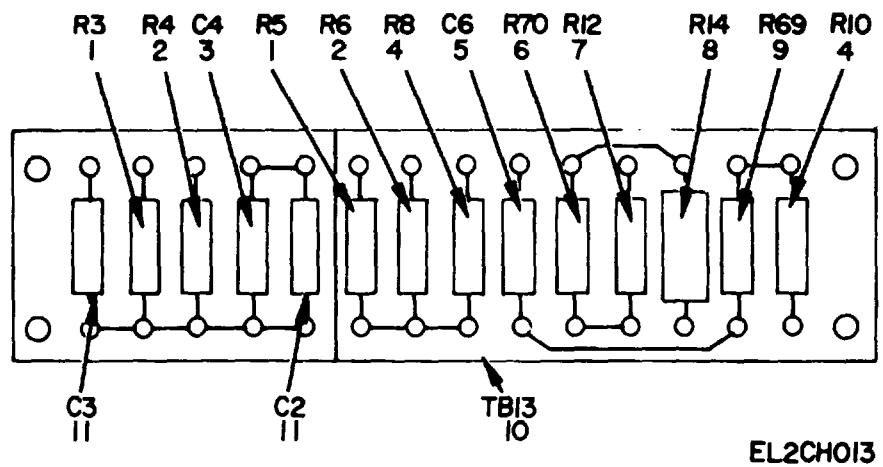


Figure 9. Terminal Board Assembly 608D-75S-3-PM.

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 020303 TERMINAL BOARD ASSEMBLY 608D-75S-3-PM		
9	1	XDHZZ	5905-00-236-1367	RN15X2842F	81349	RESISTOR, FIXED, FILM	EA	2
9	2	PMHZZ		RNC70K7502FS	81349	RESISTOR, FIXED, FILM	EA	2
9	3	XDHZZ		CM20E471J	81349	CAPACITOR, FIXED, MICA, DIELECTRIC	EA	1
9	4	PAHZZ		RC326F152K	81349	RESISTOR, FIXED, COMPOSITION	EA	2
9	S	XDHZZ		CM30B182K	81349	CAPACITOR, FIXED, MICA, DIELECTRIC	EA	1
9	6	PAHZZ		RCR32G154JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
9	7	PAHZZ		RC32GF104K	81349	RESISTOR, FIXED, COMPOSITION	EA	1
9	8	PAHZZ		RCR32G123JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
9	9	XDHZZ		RC32GF105K	81349	RESISTOR, FIXED, COMPOSITION	EA	1
9	10	XDHZZ		M93-6PS	09182	TERMINAL BOARD	AM5	1
9	10	XDHZZ		2128	02764	TERMINAL BOARD	AM6	1
9	11	XDHZZ		CM35E562G	81349	CAPACITOR, FIXED, MICA, DIELECTRIC	EA	2
					31			


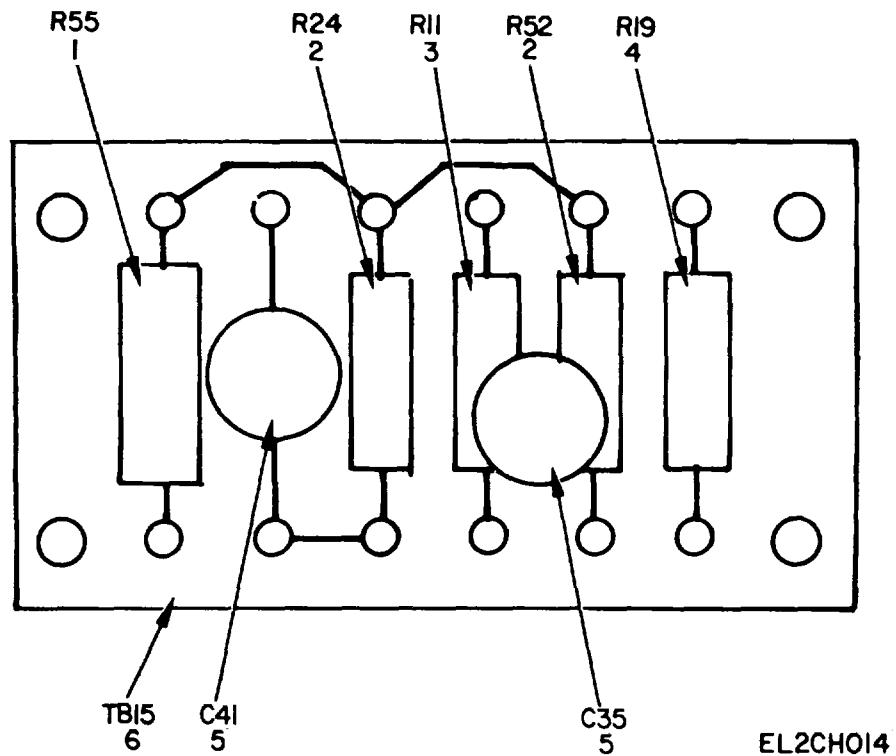


Figure 10. Terminal Board Assembly 608D-75S-4-PM.

SECTION II

TM 11-6625-508-24P

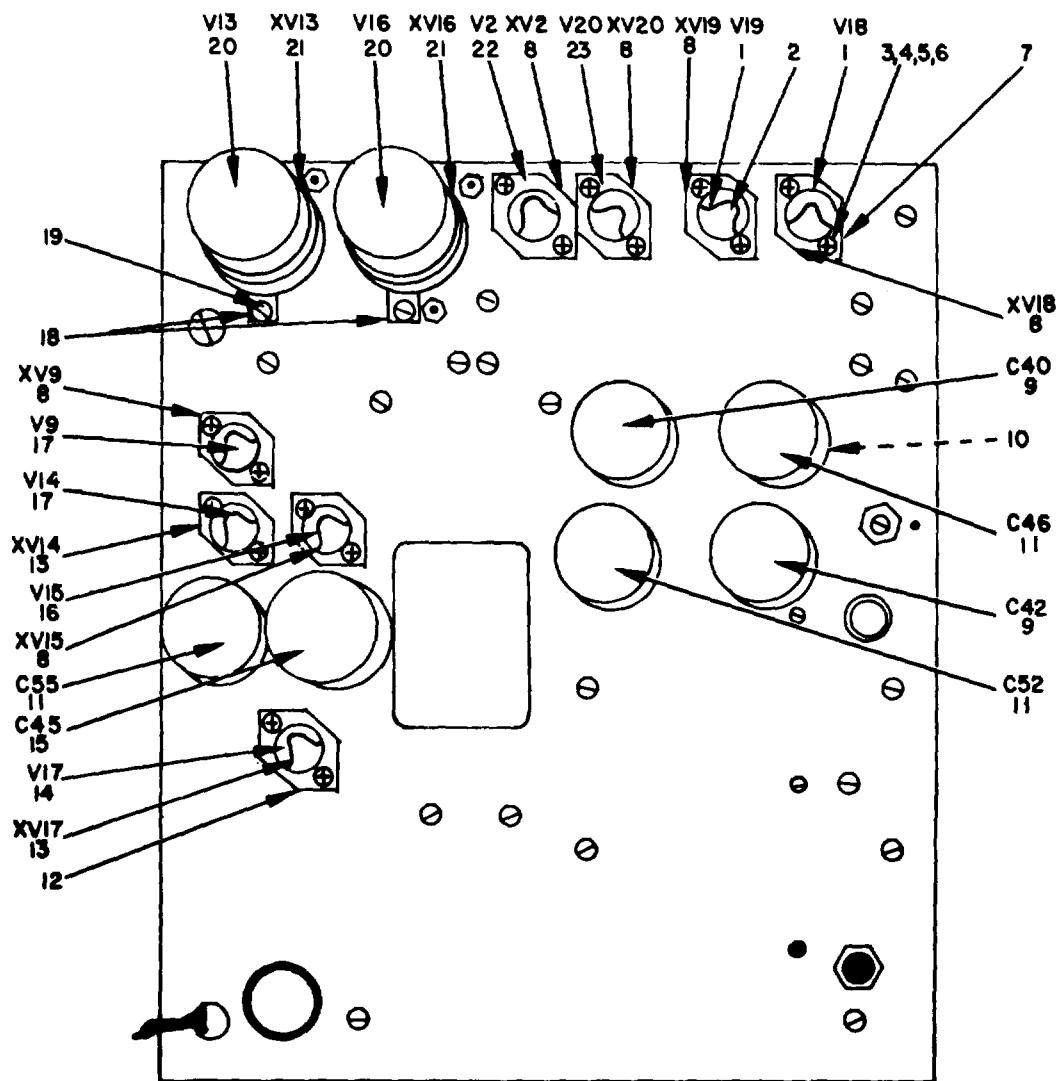

EL2CHO15

Figure 11. Chassis Assembly 608D-E-111 (Sheet 1 of 2).

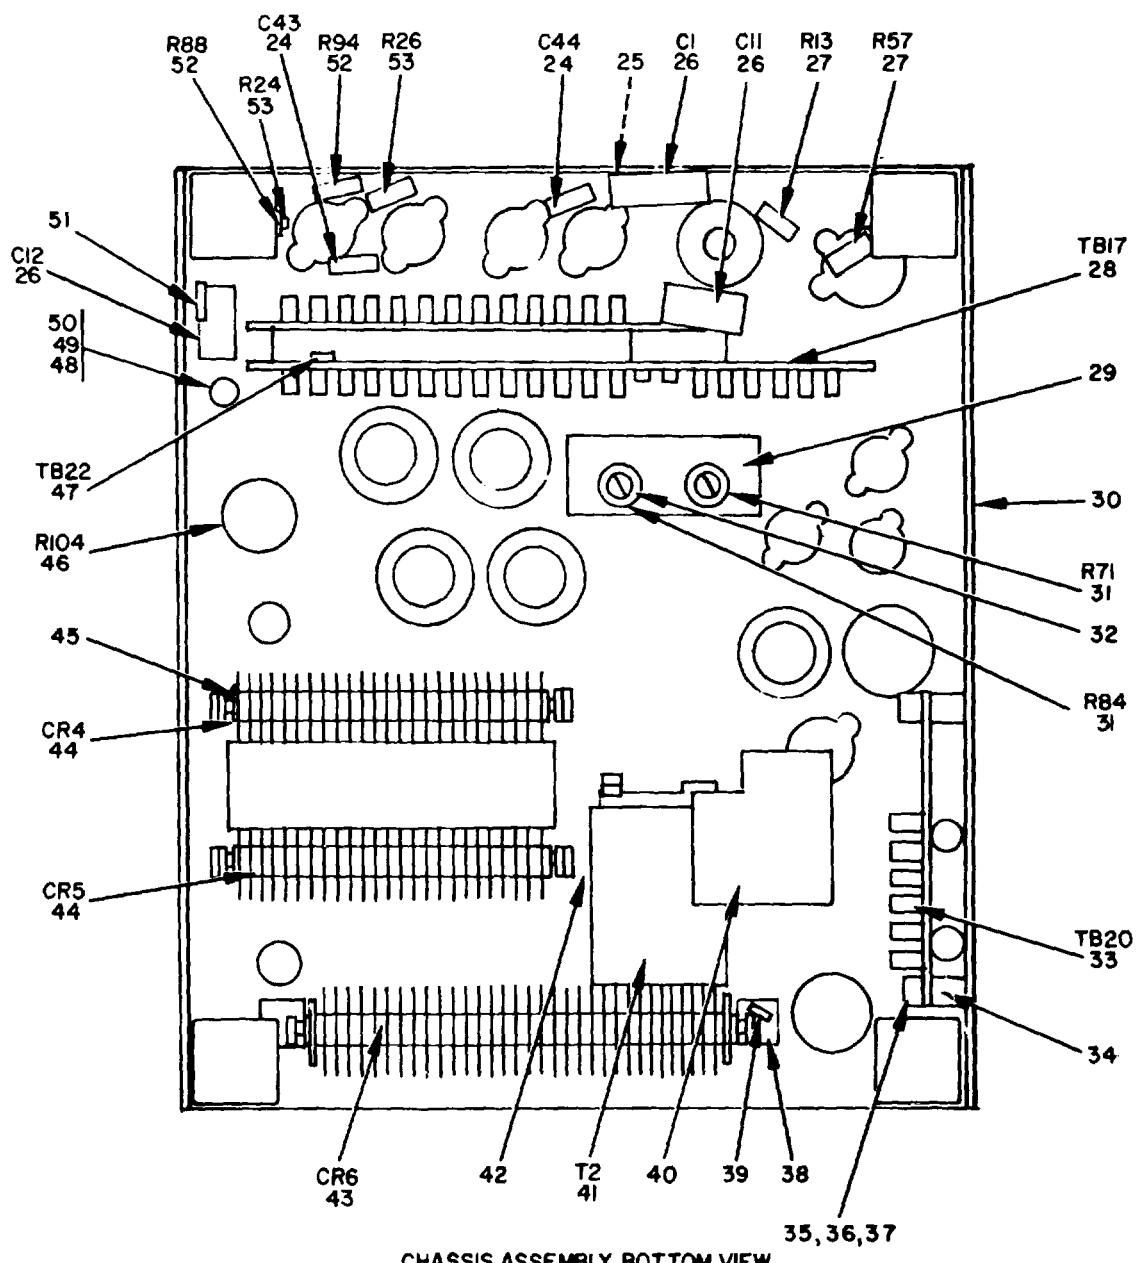


Figure 11. Chassis Assembly 608D-E-III (Sheet 2 of 2).

SECTION II

TM 11-6625-508-24P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE		(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.							U/M	
						GROUP 0204 CHASSIS ASSEMBLY 608D-E-111			
11	1	PAOZZ	5960-00-542-7004	6AH6WA	81349	ELECTRON TUBE		EA	2
11	2	XDHZZ		G12CNPS	09182	RETAINER, ELECTRON TUBE	AM5	EA	8
11	2	XDHZZ		103W	02820	RETAINER, ELECTRON TUBE	AM6	EA	8
11	3	XDHZZ		ANS20PB6-8	88044	SCREW		EA	1
11	4	XDHZZ		MS35335-72	96906	WASHER		EA	3
11	5	XDHZZ		MS35333-88	96906	WASHER		EA	35
11	6	PAHZZ	5310-00-013-4530	MS35549-62	96906	NUT		EA	33
11	7	XDHZZ		G12EPS	09182	BASE, RETAINER	AM5	EA	6
11	7	XDHZZ		2019	02764	BASE, RETAINER	AM6	EA	6
11	8	XDHZZ		BR377PHSPTD	91662	SOCKET, ELECTRON TUBE		EA	6
11	9	XDHZZ		CE41F800R	81349	CAPACITOR, FIXED, ELECTROLYTIC		EA	2
11	10	XDHZZ		608D88EPS	09182	INSULATOR, CAPACITOR	AM5	EA	3
11	10	XDHZZ		2322	02764	INSULATOR, CAPACITOR	AM6	EA	3
11	11	XDHZZ		CE41F100R	81349	CAPACITOR, FIXED, ELECTROLYTIC		EA	3
11	12	XDHZZ		G12FPS	09182	BASE, RETAINER	AMS	EA.	2
11	12	XDHZZ		102B	02820	BASE, RETAINER	AM6	EA	2
11	13	PAHZZ	5935-00-812-9142	BR316PHSPTD	91662	SOCKET, ELECTRON TUBE		EA	2
11	14	PAOZZ	5960-00-179-4749	5687WB	81349	ELECTRON TUBE		EA	1
11	15	XDHZZ		CE41F450R	81349	CAPACITOR, FIXED, ELECTROLYTIC		EA	1
11	16	PAOZZ	5960-00-167-0389	5651	81349	ELECTRON TUBE		EA	1
11	17	PAOZZ	5960-00-681-9802	6AU6WB	09182	ELECTRON TUBE		EA	2
11	18	PAHZZ	5960-00-617-4112	130U1-21D	91506	RETAINER, ELECTRON TUBE		EA	2
11	19	XDHZZ		AN520PB6-6	88044	SCREW		EA	3
11	20	PAOZZ	5960-00-179-3252	6080WC	81349	ELECTRON TUBE		EA	2
11	21	PAHZZ	5935-00-063-5789	TS101P01	96906	SOCKET, ELECTRON TUBE		EA	2
11	22	PAOZZ	5960-00-166-7663	5814/12AU7	09182	ELECTRON TUBE		EA	1
11	23	PAOZZ	5960-00-879-5078	5726	81349	ELECTRON TUBE		EA	1
11	24	XDHZZ		CK63Y1032	81349	CAPACITOR, FIXED, CERAMIC DIELECTRIC	AM6	EA	2
11	24	PAHZZ	5910-00-280-6451	BPD. 01	96095	CAPACITOR, FIXED, CERAMIC DIELECTRIC	AM5	EA	2
11	25	PAHZZ	5340-00-584-6133	7-16-6R	95987	CLAMP, LOOP		EA	3
11	26	PAHZZ	5910-00-807-5570	CP05A1KE104K3	81349	CAPACITOR, FIXED, PAPER DIELECTRIC		EA	3
11	27	PAHZZ	S905-00-121-9861	RCR32G102JS	81349	RESISTOR, FIXED, COMPOSITION		EA	2
11	28	XDHZZ		608D75R2PM	09182	TERMINAL BOARD ASSEMBLY	AM5	EA	1
11	28	XDHZZ		2400	02764	TERMINAL BOARD ASSEMBLY	AM6	EA	1
11	29	XDHZZ		608D12KPS	09182	BRACKET, RESISTOR MOUNTING	AM5	EA	1
11	29	XDHZZ		2346	02764	BRACKET, RESISTOR MOUNTING		EA	1
11	30	XDHZZ		608D1PM	09182	CHASSIS, REAR	AM5	EA	1
11	30	XDHZZ		2195-1	02764	CHASSIS, REAR	AM6	EA	2
11	31	PAHZZ	5905-00-542-9316	RV4NAYSB502A	81349	RESISTOR, VARIABLE		EA	2
11	32	PAHZZ	535-00-15-6559	1510	88245	SHAFT LOCK, ELECTRONIC COMPONENT		EA	3

SECTION II

TM 11-6625-508-24P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.						U/M	
11	33	XDHZZ	5310-00-184-8977	608D75R3PM	09182	TERMINAL BOARD ASSEMBLY	AM5	EA 1
11	33	XDHZZ		2401	02764	TERMINAL BOARD ASSEMBLY	AM6	EA 1
11	34	XDHZZ		39-56PS	09182	SPACER	AM5	EA 4
11	34	XDHZZ		2478-3	02764	SPACER	AM6	EA 4
11	35	XDHZZ		AN520PB6-16	88044	SCREW		EA 4
11	36	PAHZZ		MS35338-98	96906	WASHER		EA 4
11	37	XDHZZ		AN960C6	88044	WASHER		EA 4
11	38	XDHZZ		608D47APS	09182	BRACKET, ANGLE	AM5	EA 2
11	38	XDHZZ		2291	02764	BRACKET, ANGLE	AM6	EA 2
11	39	XDHZZ		MS35335-74	96906	WASHER		EA 8
11	40	XDHZZ		608D12LPS	09182	BRACKET, CABLE GUIDE	AM5	EA 1
11	40	XDHZZ		2329	02764	BRACKET, CABLE GUIDE	AM6	EA 1
11	41	XDHZZ		91245PS	09182	TRANSFORMER, AUDIO FREQUENCY	AM5	EA 1
11	41	XDHZZ		2075	02764	TRANSFORMER, AUDIO FREQUENCY	AM6	EA 1
11	42	XDHZZ		608D12GPS	09182	BRACKET, TRANSFORMER	AM5	EA 1
11	42	XDHZZ		2336	02764	BRACKET, TRANSFORMER	AP6	EA 1
11	43	XDHZZ		A9B1BHY	81483	RECTIFIER, METALLIC	AM6	EA 1
11	43	XDHZZ		6RS21GB9BAG1	24455	RECTIFIER, METALLIC	AM5	EA 1
11	44	XDHZZ		6RS21GD13BAG1	24455	RECTIFIER, METALLIC	AM5	EA 2
11	44	XDHZZ		B13D1B64	81483	RECTIFIER, METALLIC	AM6	EA 2
11	45	XDHZZ		608D12APS	09182	BRACKET, ANGLE	AM5	EA 2
11	45	XDHZZ		2290	02764	BRACKET, ANGLE	AM6	EA 2
11	46	PAHZZ	5905-00-134-9862	RV4ATSA502A	81349	RESISTOR, VARIABLE		EA 1
11	47	XDHZZ	5940-00-204-9114	608075R1PM	09182	TERMINAL BOARD ASSEMBLY	AM5	EA 1
11	47	XDHZZ		2456-2457	02764	TERMINAL BOARD ASSEMBLY	AM6	EA 1
11	48	PAHZZ		2916-06-01	78189	TERMINAL, LUG		EA 3
11	49	XDHZZ		1023-04-3-4	72656	INSULATOR, STANDOFF	AM5	EA 3
11	49	PAHZZ	5970-00-178-1152	NL522W01-008	81349	INSULATOR, STANDOFF	AM6	EA 3
11	50	XDHZZ	H824F	72653	WASHER, FLAT	AM5	EA 6	
11	50	XDHZZ	2486-2	02764	WASHER, FLAT	AM6	EA 6	
11	51	XDHZZ	AN960-6	88044	WASHER		EA 3	
11	52	PAHZZ	595-DO-185-6946	RC20GF474K	81349	RESISTOR, FIXED, COMPOSITION		EA 2
11	53	PAHZZ	5905-00-104-8345	RCR20G560JS	81349	RESISTOR, FIXED, COMPOSITION		EA 2

38/(39 blank)

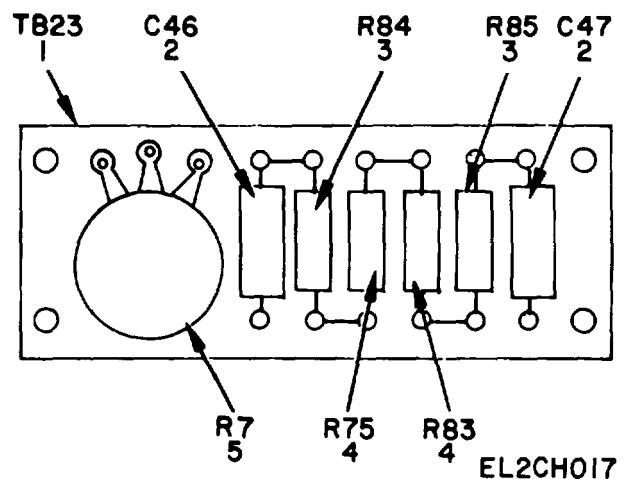


Figure 12. Terminal Board Assembly 608D-75R-3-PM.

SECTION II

TM 11-6625-508-24P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
12	1	XDHZZ		608D7R31PS 2449	09182 02764	TERMINAL BOARD TERMINAL BOARD	AM5 AM6	EA 1
12	1	XDHZZ	5910-00-509-4327	CP26A1EF103M	81349	CAPACITOR, FIXED, PAPER DIELECTRIC		EA 1
12	2	PAHZZ	5905-00-247-8715	RCR32G224JS	81349	RESISTOR, FIXED, COMPOSITION		EA 2
12	3	PAHZZ		RC32GF333K	81349	RESISTOR, FIXED, COMPOSITION		EA 2
12	4	XDHZZ		RV4ATSA152A	81349	RESISTOR, VARIABLE		EA 1
	B	XDHZZ			41	GROUP 020401 TERMINAL BOARD ASSEMBLY 608D-75R-3-PM		

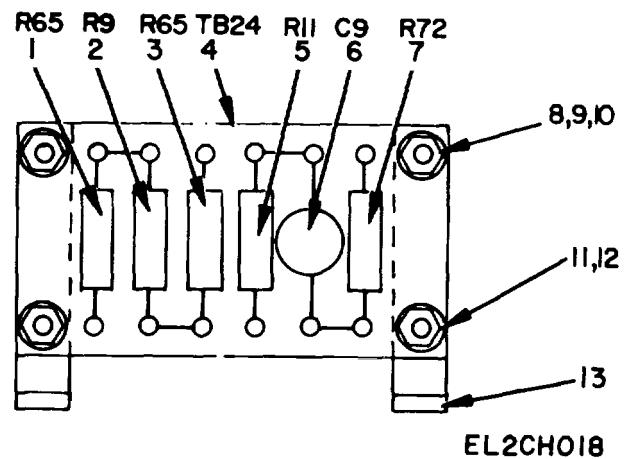


Figure 13. Terminal Board Assembly 608D-75R-2-PM.

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 020402 TERMINAL BOARD ASSEMBLY 608D-75R-2-PM		
13	1	PAHZZ	5905-00-228-6084	RC32GF123KS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
13	2	PAHZZ	5905-00-104-8351	RCR32G154JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
13	3	PAHZZ	5905-00-279-4307	RC32GF185JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
13	4	XDHZZ		M93-3PS	09182	TERMINAL BOARD	AMS	1
13	4	XDHZZ		2450	09182	TERMINAL BOARD	AM6	1
13	5	XDHZZ		RC32GF105K	81349	RESISTOR, FIXED, COMPOSITION	EA	1
13	6	XDHZZ		CK63Y103Z	81349	CAPACITOR, FIXED, CERAMIC DIELECTRICAM6	EA	1
13	6	PAHZZ	5910-00-280-6451	BPD.01	96095	CAPACITOR, FIXED, CERAMIC DIELECTRICAM5	EA	1
13	7	PAHZZ	5905-00-247-8715	RCR32G224JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
13	8	XDHZZ		AN515C6-8	88044	SCREW	EA	4
13	9	XDHZZ		MS35333-88	96906	WASHER	EA	4
13	10	XDHZZ		MS35335-72	96906	WASHER	EA	4
13	11	XDHZZ		AN960C6	88044	WASHER	EA	4
13	12	PAHZZ	5310-00-013-4530	MS35649-62	96906	NUT	EA	4
13	13	XDHZZ		M47BPS	09182	SUPPORT, TERMINAL BOARD	AM5	2
13	13	OXDZZ		2130	02764	SUPPORT, TERMINAL BOARD	AM6	2


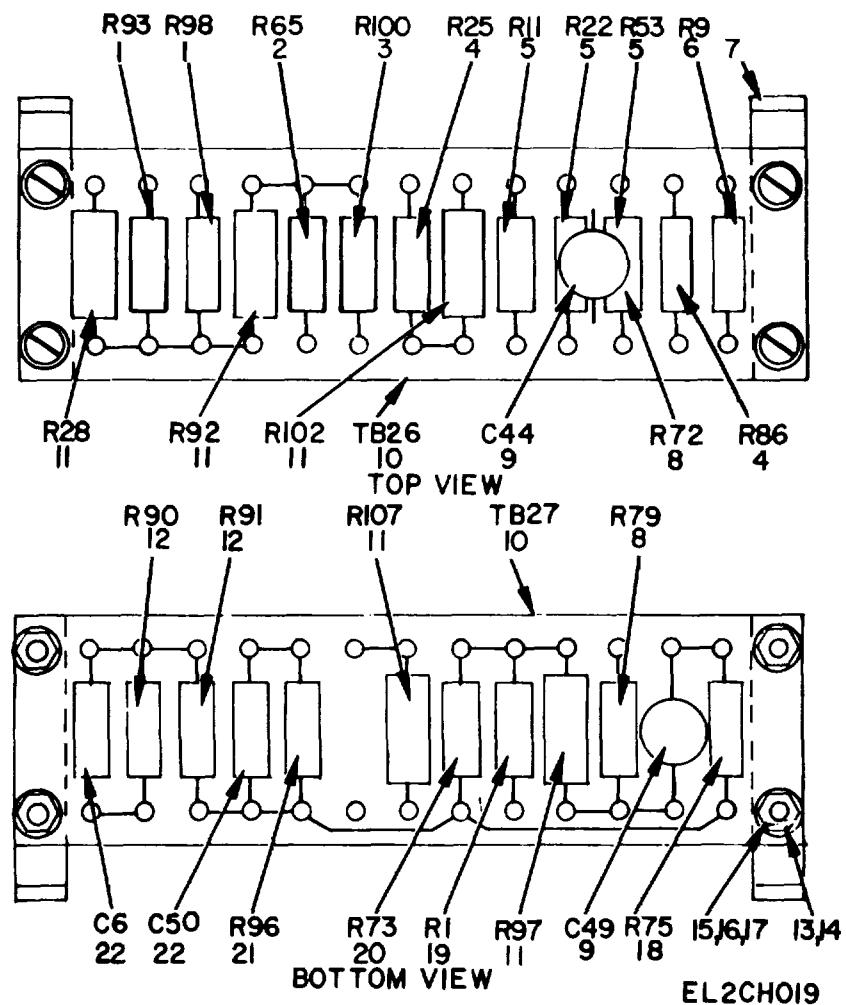


Figure 14. Terminal Board Assembly 608D-75R-1-PM.

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 020403 TERMINAL BOARD ASSEMBLY 608D-75R-1-PM		
14	1	XDHZZ		RC32GF823K	B1349	RESISTOR, FIXED, COMPOSITION	EA	2
14	2	PAHZZ	5905-00-552-5057	RC32GF182K	81349	RESISTOR, FIXED, COMPOSITION	EA	1
14	3	PAHZZ	5905-00-279-2537	RC32GF10DK	81349	RESISTOR, FIXED, COMPOSITION	EA	1
14	4	PAHZZ	5905-00-106-1247	RCR32G221JS	81349	RESISTOR, FIXED, COMPOSITION	EA	2
14	5	XDHZZ		RC32GF1OSK	81349	RESISTOR, FIXED, COMPOSITION	EA	3
14	6	PAHZZ	5905-00-104-8351	RCR326154J5	81349	RESISTOR, FIXED, COMPOSITION	EA	1
14	7	XDHZZ		M47BPS	09182	SUPPORT, TERMINAL BOARD	AM5	4
14	7	XDHZZ		2130	02764	SUPPORT, TERMINAL BOARD	AM6	4
14	8	PAHZZ	5905-00-247-8715	RC32GF224J	81349	RESISTOR, FIXED, COMPOSITION	EA	2
14	9	PAHZZ	5910-00-280-6451	BPD. 01	96095	CAPACITOR, FIXED, CERAMIC DIELECTRIC	AM5	2
14	9	XDHZZ		CK63Y103Z	81349	CAPACITOR, FIXED, CERAMIC DIELECTRIC	AM6	2
14	10	XDHZZ		M93-55/8PS	09182	TERMINAL BOARD	AM5	2
14	10	XDHZZ		2458-2459	02764	TERMINAL BOARD	AM6	2
14	11	PAHZZ	5905-00-279-2527	RC42GF223JS	81349	RESISTOR, FIXED, COMPOSITION	EA	2
14	12	PAHZZ	5905-00-131-1256	RCR32G820JS	81349	RESISTOR, FIXED, COMPOSITION	EA	2
14	13	XDHZZ		AN515C6-14	88040	SCREW	EA	4
14	14	XDHZZ		AN960C6	88044	WASHER	EA	4
14	15	XDHZZ		MS35338-79	96906	WASHER	EA	4
14	16	PAHZZ	531-0-013-4530	MS35649-62	96906	NUT	EA	4
14	17	XDHZZ		39-52	09182	SPACER	EA	4
14	18	XDHZZ		RC32GF333K	81349	RESISTOR, FIXED, COMPOSITION	EA	1
14	19	PAHZZ	5905-00-247-8735	RC32GF563K	81349	RESISTOR, FIXED, COMPOSITION	EA	1
14	20	PAHZZ	5905-00-104-5757	RCR32G273JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
14	21	PAHZZ	5905-00-110-0991	RCR32G151JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
14	22	XDHZZ		CM30B182K	81349	CAPACITOR, FIXED, MICA DIELECTRIC	EA	2
					45			

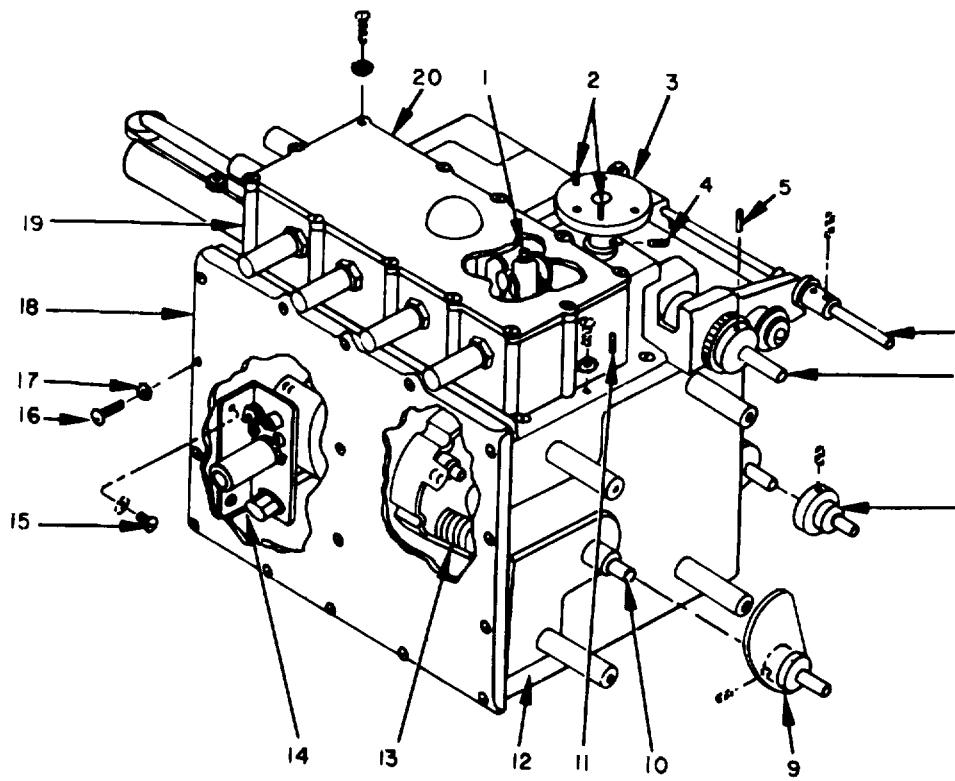

EL2CH020

Figure 15. Generator Assembly 608D-59(N)-PL.

SECTION II

TM 11-6625-508-24P

(1) ILLUSTRATION		(2) ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 0205 GENERAL ASSEMBLY 608D-59-(N)-PL		
15	1	XDHZZ		6BC4GASSEMBLY	09182	TUBE COMPARTMENT ASSEMBLY	EA	1
15	2	XDHZZ		59-022-094-0375	72962	PIN, SPRING	EA	2
15	3	XDHZZ		608D20GPS	09182	HUB, DRUM, DIAL	AM5	1
15	3	XDHZZ		2373	02764	HUB, DRUM, DIAL	AM6	1
15	4	XDHZZ		AN565D844	88044	SETSCREW	EA	2
15	5	XDHZZ		AN56B8H3	88044	SETSCREW	EA	4
15	6	XDHZZ		608037MPS	09182	EXTENSION SHAFT	AMS	1
15	6	XDHZZ		2379	02764	EXTENSION SHAFT	AM6	1
15	7	XDHZZ		608D37LPS	09182	EXTENSION SHAFT	AM5	1
15	7	XDHZZ		2378	02764	EXTENSION SHAFT	AM6	1
15	8	XDHZZ		608D47DNPS	09182	COLLAR, SHAFT	AM5	1
15	8	XDHZZ		2298	02764	COLLAR, SHAFT	AM6	1
15	9	XDHZZ		608D99BPS	09182	CAM, CONTROL	AM5	1
15	9	XDHZZ		2071	02764	CAM, CONTROL	AM6	1
15	10	XDHZZ		608D37KPS	09182	EXTENSION SHAFT	AM5	1
15	10	XDHZZ		2395	02764	EXTENSION SHAFT	AM6	1
15	11	XDHZZ		59-028-125-0500	76962	PIN, SPRING	EA	2
15	12	XDHZZ		2198	09182	HOUSING ASSEMBLY	AM6	1
15	12	XDHHH		608D59N2PM	02050	HOUSING ASSEMBLY	AM5	1
15	13	XDHHH		2238ASSEMBLY	09182	TUNER COMPARTMENT ASSEMBLY	EA	1
15	14	XDHHH		608DM117	09182	CRYSTAL CALIBRATOR ASSEMBLY	AM5	1
15	14	XDHHH		2247	09187	CRYSTAL CALIBRATOR ASSEMBLY	AM6	1
15	15	XDHZZ		AN515C6-4	88044	SCREW	EA	2
15	16	XDHZZ		AN515C6-8	88044	SCREW	EA	39
15	17	PAHZZ	5310-00-559-0070	MS35333-88	96906	WASHER	EA	41
15	18	XDHZZ		608D20BPS	09182	COVER, HOUSING	AM5	1
15	18	XDHZZ		2239	02764	COVER, HOUSING	AM6	1
15	19	XDHHH		2197	09182	CHASSIS ASSEMBLY	AM5	1
15	19	XDHHH		608D59N1PL	09182	CHASSIS ASSEMBLY	AM6	1
15	20	XDHZZ		608D20FPS	09182	COVER, CHASSIS	AM5	1
15	20	XDHZZ		2361	02764	COVER, CHASSIS	AM6	1

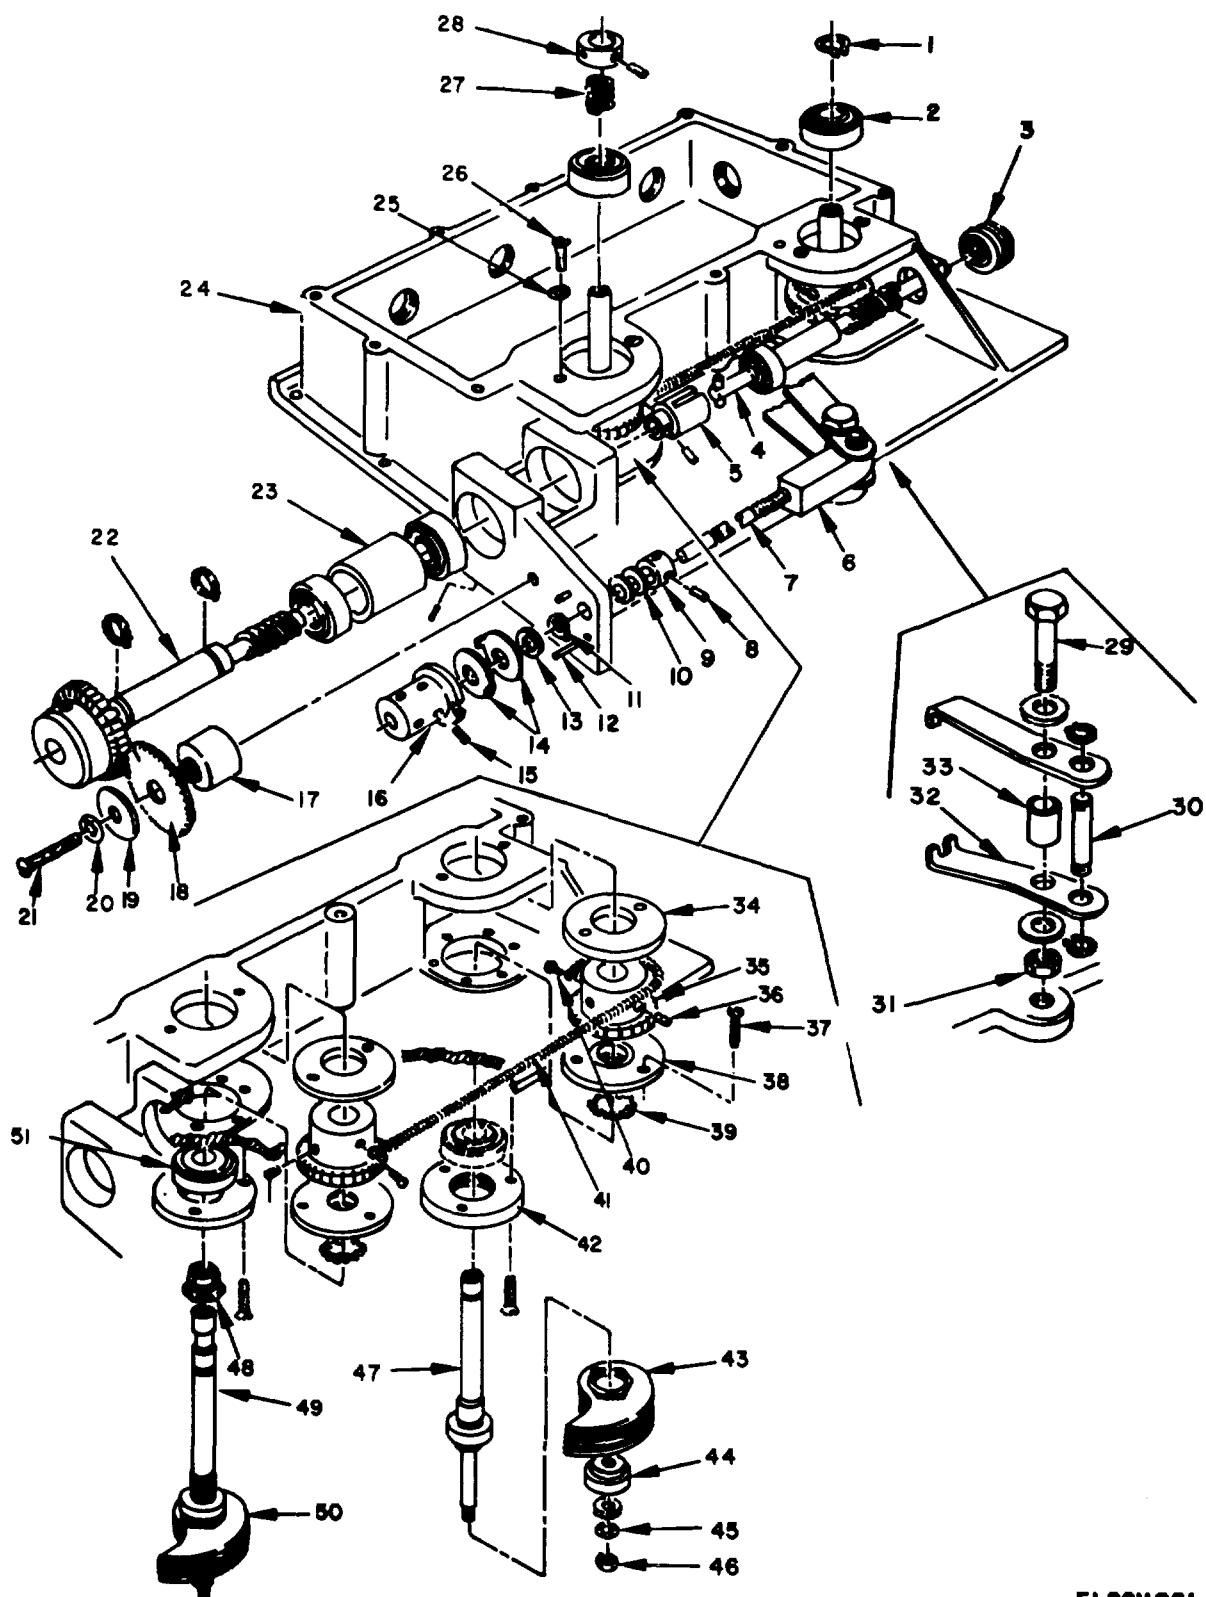
**EL2CH021**

Figure 16. Generator Chassis Assembly 608D-59(N)-1-PL.

(1) ILLUSTRATION (a)		(2) SMR (b)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) QTY U/M	(8) INC IN UNIT
16	1	XDHZZ		5100-37SMI	09182	RING, RETAINING		
16	2	PAHZZ	3110-00-155-8416	S3KDD	21335	BEARING, BALL, ANNULAR	EA	3
16	3	PAHZZ	3110-00-151-8095	F4DDC1	21335	BEARING, BALL, ANNULAR	EA	5
16	4	XDHZZ		608D37APS	09182	SHAFT ASSEMBLY, DRIVE	AM5	1
16	4	XDHZZ		2259	02764	SHAFT ASSEMBLY, DRIVE	AM6	1
16	5	XDHZZ		608A36APS	09182	COUPLING HALF, SHAFT	AM5	1
16	5	XDHZZ		2167	07264	COUPLING, HALF SHAFT	AM6	1
16	6	XDHZZ		608A36BPS	09182	NUT, TRIMMER	AM5	1
16	6	XDHZZ		2168	02764	NUT, TRMMER	AM6	1
16	7	XDHZZ		608D37NPS	09182	SHAFT, TRIMMER	AM5	1
16	7	XDHZZ		2354	02764	SHAFT, TRIMMER	AM6	1
16	8	XDHZZ		AN565D8H2	88044	SETSCREW		6
16	9	XDHZZ		M71PS	09182	COLLAR, SHAFT	AM5	1
16	9	XDHZZ		2014	02764	COLLAR, SHAFT	AM6	1
16	10	XDHZZ		AN961-416	88044	WASHER		1
16	11	XDHZZ		5100-25SM1	79136	RING, RETAINING		3
16	12	XDHZZ		59-01-062-0500	72962	PIN.SPRING		2
16	13	XDHZZ		AN960C416	8844	WASHER		7
16	14	XDHZZ		G32BPS	09182	WASHER, KEY	AM5	2
16	14	XDHZZ		2125	02764	WASHER, KEY	AM6	2
16	15	XDHZZ		AN565D8H3	88044	SETSCREW		4
16	16	XDHZZ		608D20AP	09181	COLLAR .SHAFT	AM5	1
16	16	XDHZZ		2380	02764	COLLAR, SHAFT	AM6	1
16	17	XDHZZ		608D47JPS	09182	SPACER, GEAR	AM5	1
16	17	XDHZZ		2375	02764	SPACER, GEAR	AM6	1
16	18	XDHZZ		608D24BPS	09182	GEAR, IDLER	AM5	1
16	18	XDHZZ		2363	02764	GEAR, IDLER	AM6	1
16	19	XDHZZ		AN960C10	88044	WASHER		1
16	20	XDHZZ		MS35333-90	9690	WASHER		1
16	21	XDHZZ		AN515C10-16	8D44	SCREW		1
16	22	XDHZZ		608D37PPS	09182	SHAFT ASSEMBLY, DRIVE	AM5	1
16	22	XDHZZ		2367	02764	SHAFT ASSEMBLY, DRIVE	AM6	1
16	23	XDHZZ		608D47FPS	0918	SPACER, SLEEVE	AM5	1
16	23	XDHZZ		2377	02764	SPACER, SLEEVE	AM6	1
16	24	XDHZZ		608DE3111	09182	CHASSIS ASSEMBLY	AM5	1
16	24	XDHZZ		2215	02764	CHASSIS ASSEMBLY	AM6	1
16	25	XDHZZ		MS35333-88	96906	WASHER		4
16	26	XDHZZ		AN515C6-6	88044	SCREW		4

(1) ILLUSTRATION (a)		(2) SMR (b)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE		(7) U/M	(8) QTY INC IN UNIT
FIG NO.	ITEM NO.	SMR CODE							
16	27	XDHZZ		146-24PS	09182	SPRING, HELICAL, COMPRESSION	AM5	EA	1
16	27	XDHZZ		2110	02764	SPRING, HELICAL, COMPRESSION	AM6	EA	1
16	28	XDHZZ		G32FPS	09182	COLLAR, SHAFT	AM5	EA	1
16	28	XDHZZ		2126	02764	COLLAR, SHAFT	AM6	EA	1
16	29	XDHZZ		608D36CPS	09182	BOLT, MACHINE	AM5	EA	1
16	29	XDHZZ		2372	02764	BOLT, MACHINE	AM6	EA	1
16	31	XOHZZ		608A36GPS	09182	PIN, TRIMMER	AM5	EA	1
16	30	XDHZZ		2170	02764	PIN, TRIMMER	AM6	EA	1
16	31	XDHZZ		AN345C416	88044	NUT		EA	1
16	32	XDHZZ		608A36DPS	09182	ARM, TRIMMER	AM5	EA	2
16	32	XDHZZ		2169	02764	ARM, TRIMMER	AM6	EA	1
16	33	XDHZZ		608A47APS	09182	SPACER	AM5	EA	1
16	33	XDHZZ		2161	02764	SPACER	AM5	EA	1
16	34	XDHZZ		608D88APS	09182	WASHER, BEARING	AM5	EA	2
16	34	XDHZZ		2376	02764	WASHER, BEARING	AM6	EA	2
16	35	XDHZZ		608D24APS	09182	GEAR, WORM	AM5	EA	2
16	35	XDHZZ		2359	02764	GEAR, WORM	AM6	EA	2
16	36	XDHZZ		AN565D8H4	88044	SETSCREW		EA	4
16	37	XDHZZ		AN520C6-8	88044	SCREW		EA	12
16	38	XDHZZ		608D88HPS	09182	WASHER SHIELD, OUTER	AM5	EA	2
16	38	XDHZZ		2335	02764	WASHER, SHIELD, OUTER	AM6	EA	2
16	39	XDHZZ		10-006	09182	GASKET, WIRE BRAID		EA	4
16	40	XDHZZ		AN515C4-4	88044	SCREW		EA	2
16	41	XDHZZ		608D36FPS	09182	SPRING, HELICAL, EXTENSION	AM5	EA	1
16	41	XDHZZ		2174	02764	SPRING, HELICAL, EXTENSION	AM6	EA	1
16	42	XDHZZ		608D88JPS	09182	WASHER, SHIELD, INNER	AM5	EA	2
16	42	XDHZZ		2333	02764	WASHER, SHIELD, INNER	AM6	EA	2
16	43	XDHZZ		608D7R6PS	09182	PLATE ASSEMBLY, ROTOR	AM5	EA	1
16	43	XDHZZ		2306	02764	PLATE ASSEMBLY, ROTOR	AM6	EA	1
16	44	XDHZZ		608D41APS	09182	INSULATOR, ROTOR	AM5	EA	5
16	44	XDHZZ		2399	02764	INSULATOR, ROTOR	AM6	EA	4
16	45	XDHZZ	5310-00-761-6182	MS35333-91	96906	WASHER		EA	2
16	46	PAHZZ		MS3569-402	96906	NUT		EA	1
16	47	XDHZZ		608D37JPS	09182	SHAFT, ROTOR	AM5	EA	1
16	47	XDHZZ		2397	02764	SHAFT, ROTOR		EA	1
16	48	XDHZZ		608D57APS	09182	NUT, ADJUSTING	AM6	EA	1
16	48	XDHZZ		2339	02764	NUT, ADJUSTING	AM5	EA	1
16	49	XDHZZ		608D37RPS	09182	SHAFT, ROTOR	AM5	EA	1

SECTION II

TM 11-6625-508-24P

(1) ILLUSTRATION (a)		(2) SMR CODE (b)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
16	49	XDHZZ		2343	02764	SHAFT, ROTOR	AM6	EA 1
16	50	XDHZZ		608D7R5PS	09182	PLATE ASSEMBLY, ROTOR	AM5	EA 1
16	50	XDHZZ		2305	02764	PLATE ASSEMBLY, ROTOR	AM6	EA 1
16	51	XDHZZ		MS3KDD	21355	BEARING, BALL, ANNULAR	EA	1
					51			

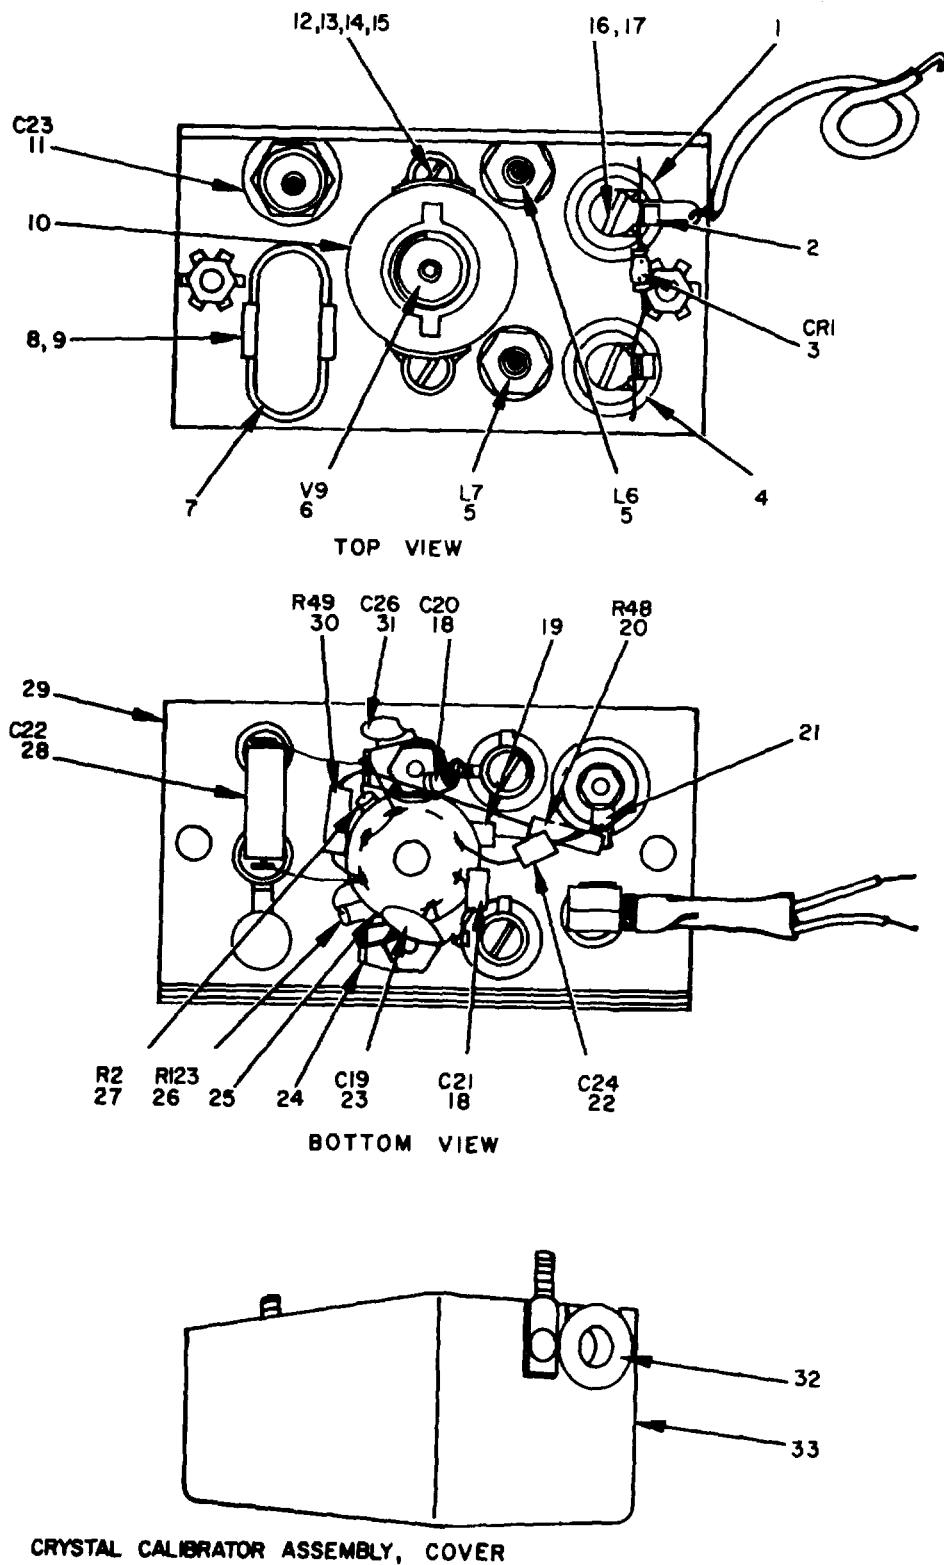


Figure 17. Crystal Calibrator Assembly 608D-M-117.

EL2CH022


SECTION II

TM 11-6625-508-24P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.						U/M	
						GROUP 020502 CRYSTAL CALIBRATOR ASSEMBLY 608D-M-117		
17	1	PAHZZ	5970-00-988-1277	1493-00	72656	INSULATOR, BUSHING	EA	2
17	2	XDHZZ		G12BS	09182	CLIP, CRYSTAL	EA	2
17	2	XDHZZ		CQR29A1KF103				
				KMS81349				
17	3	XDHZZ		212G11A	28480	CLIP, CRYSTAL	AM6	2
17	3	XDHZZ		2135	02764	SEMICONDUCTOR DEVICE, DIODE	AM5	1
17	4	XDHZZ		34-11GPS	09182	SEMICONDUCTOR DEVICE, DIODE	AM6	1
17	4	XDHZZ		2044	02764	INSULATOR, BUSHING	AM5	1
17	5	XDHZZ		110D	99821	INSULATOR, BUSHING	AM6	1
17	5	XDHZZ		2253	02764	COIL, RADIO FREQUENCY	AM5	2
17	6	PAOZZ	5960-00-617-9304	6AU6WA	80131	COIL, RADIO FREQUENCY	AM6	2
17	6	PAOZZ	5960-00-729-6963	6U8A	81349	ELECTRON TUBE	AM5	1
17	7	XDHZZ		CR18U	09182	ELECTRON TUBE	AM6	1
17	8	XDHZZ		430BC	91662	CRYSTAL UNIT, QUARTZ	EA	1
17	9	XDHZZ		G69B6PS	09182	SOCKET, CRYSTAL	EA	1
17	9	XDHZZ		2156	09182	CLIP, CRYSTAL	AM5	1
17	10	PAHZZ	5960-00-860-7709	M24251-6-2	81349	CLIP, CRYSTAL	AM6	1
17	11	PAHZZ	5910-00-617-4249	680021	81349	SHIELD, .ELECTRON TUBE	AM5	A
17	12	XDHZZ		AN515C4-6	14674	CAPACITOR, VARIABLE	EA	1
17	13	XDHZZ		MS35333-87	88044	SCREW	EA	2
17	14	XDHZZ		MS35333-71	96906	WASHER	EA	2
17	15	XDHZZ		MS35649-42	96906	WASHER	AE	2
17	16	XDHZZ		AN515C6-12	96906	NUT	EA	2
17	17	XDHZZ		MS35649-62	88044	SCREW	EA	1
17	18	PAHZZ	5910-00-577-7921	CC30CH470G	96906	NUT	EA	1
17	19	PAHZZ	5910-00-636-2155	CM15C680J	81349	CAPACITOR, FIXED, CERAMIC DIELECTRIC	EA	2
17	20	PAHZZ	5905-00-111-4858	RC20GF471K	81349	CAPACITOR, FIXED, MICA DIELECTRIC	AM6	1
17	20	PAHZZ	5905-00-110-0310	RC20GF392K	81349	RESISTOR, FIXED, COMPOSITION	AM5	1
17	21	PAHZZ	5940-00-511-8194	2504-06-00	81349	RESISTOR, FIXED , COMPOSITION	AM6	1
17	22	PAHZZ	5910-00-667-6114	78189	78189	TERMINAL, LUG	EA	1
17	23	PAHZZ	5910-00-538-1 08	GA4	78488	CAPACITOR, FIXED, PLASTIC DIELECTRIC	EA	1
17	23	PAHZZ	5910-00-984-8373	BPD005	72125	CAPACITOR, FIXED, CERAMIC	AM5	1
17	24	PAHZZ	5940-00-246-2770	CM15FD101GP3	81349	CAPACITOR, FIXED, CERAMIC	AM6	1
17	25	PAHZZ	5935-00-260-0516	2504-04-00	78189	TERMINAL, LUG	AM5	2
17	25	XDHZZ		TS102P01	78189	SOCKET, ELECTRON TUBE	AM5	1
17	26	PAHZZ		T17277PHSPTD	81349	SOCKET, ELECTRON TUBE	AM6	1
17	27	PAHZZ	5905-00-195-6758	09182	81349	RESISTOR, FIXED, COMPOSITION	AM6	1
17	27	PAHZZ	5905-00-111-4744	RC20GF273K	81349	RESISTOR, FIXED, COMPOSITION	AM5	1
17	28	PAHZZ	5910-00-577-1094	RCR20G512JS	81349	RESISTOR, FIXED, COMPOSITION	AM5	1
17	29	XDHZZ		CC21CH100D	81349	CAPACITOR, FIXED, CERAMIC DIELECTRIC	EA	1
				608D12FPS	09182	CHASSIS, CRYSTAL CALIBRATOR	AM5	1

SECTION II

TM 11-6625-508-24P

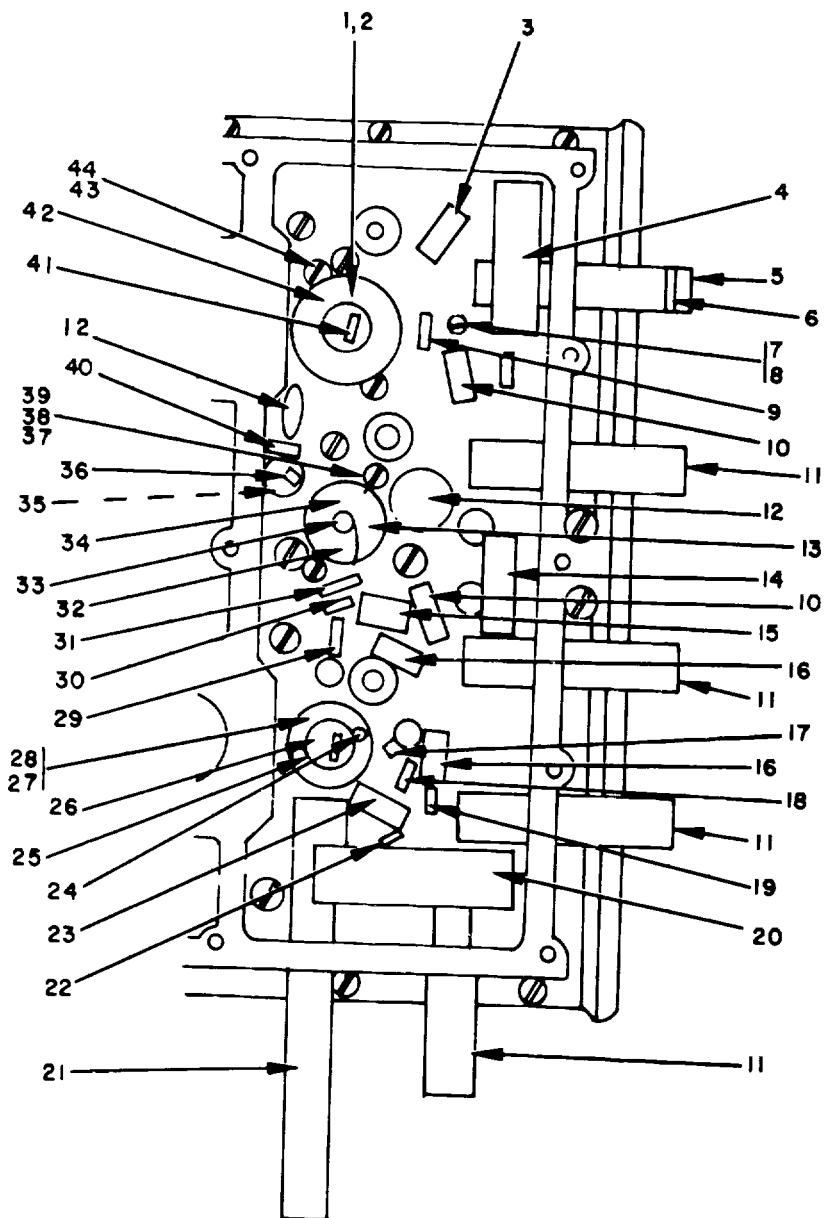

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C26	I2	R24	3
C27	I4	R26	20
C29	29	R28	23
C65	I2	R43	4
CR7	22	R77	10
FL1	5	R78	10
FL2	II	RII7	36
FL3	II	TB28	9
FL5	II	TB30	19
FL6	21	TB32	40
FL7	5	V6	42
FL9	40	V7	13
L8	I5	V8	26
L9	30	XV6	41
L10	I6	XV7	32
LII	I6	XV8	25

EL2CH023

Figure 18. Generator Tube Compartment.

SECTION II


TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	QTY U/M	INC IN UNIT
						GROUP 020503 GENERATOR TUBE COMPARTMENT		
18	1	XDHZZ		608059N3PS	09182	CONTACT ASSEMBLY	AM5	EA 1
18	1	XDHZZ		2326	09182	CONTACT ASSEMBLY	AM6	EA 1
18	2	XDHZZ		608059A4PS	09182	SPACER, GRID	AM5	EA 1
18	2	XDHZZ		2340	02764	SPACER, GRID	AM6	EA 1
18	3	PAHZZ	5905-00-405-8260	RCR426471JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
18	4	PAHZZ	590S-00-841-4111	RW31V512	81349	RESISTOR, FIXED, WIRE WOUND	EA	1
18	5	PAHZZ	5915-00-988-4193	608A27A	28B80	FILTER, RADIO, FREQUENCY	AM5	EA 2
18	5	PAHZZ	5915-00-988-4193	2182	66150	FILTER, RADIO, FREQUENCY	AM6	EA 2
18	6	XDHZZ		608020MPS	09182	STRAP, GROUNDING	AM5	EA 1
18	6	XDHZZ		2330	02764	STRAP, GROUNDING	AM6	EA 1
18	7	XDHZZ		AN515C6-4	88044	SCREW	EA	4
18	8	XDHZZ		4535333-88	96906	WASHER	EA	5
18	9	XDHZZ		1512	71700	TERMINAL BOARD	AM5	EA 4
18	9	XDHZZ		295664	76530	TERMINAL BOARD	AM5	EA 3
18	10	PAHZZ	5905-00-121-9861	RCR32G102JS	81349	RESISTOR, FIXED, COMPOSITION	EA	2
18	11	PAHZZ	5915-00-503-0050	608AS420	28480	FILTER, RADIO FREQUENCY	AM5	EA 3
18	11	PAHZZ	5915-00-503-0050	2183	28480	FILTER, RADIO FREQUENCY	AM6	EA 3
18	12	PAHZZ	5910-00-577-1306	D2000	91418	CAPACITOR, FIXED, CERAMIC	AM5	EA 2
18	12	PAHZZ	5910-00-825-7342	CK62AX222K	81349	CAPACITOR, FIXED, CERAMIC DIELECTRIC	EA	2
18	13	PAOZZ	596-00-501-1488	68C4G	09182	ELECTRON TUBE	EA	1
18	14	PAHZZ	5910-00-807-5570	CP05A1KE104K3	81349	CAPACITOR, FIXED, PAPER DIELECTRIC	EA	1
18	15	PAHZZ	5915-00-865-3311	60860C	28480	CHOKE, RADIO FREQUENCY	AM5	EA 1
18	15	XDHZZ		2408	02764	CHOKE, RADIO FREQUENCY	AM6	EA 1
18	16	XDHZZ		2422	02764	CHOKE, RADIO FREQUENCY	AM6	EA 2
18	16	XDHZZ		608D60KNPS	09182	CHOKE, RADIO FREQUENCY	AM5	EA 2
18	17	PAHZZ	5905-00-195-6806	RC20GF102K	81349	RESISTOR, .FIXED, COMPOSITION	EA	1
18	18	XDHZZ		608D60DPS	09182	FILTER, LOW PASS	AM5	EA 1
18	18	XDHZZ		2409	02764	FILTER, LOW PASS	AM6	EA 1
18	19	PAHZZ	5940-00-578-4866	295661	76530	TERMINAL BOARD	AM6	A 1
18	19	PAHZZ	5940-00-271-4622	1510	71785	TERMINAL BOARD	AM5	EA 1
18	20	XDHZZ		RW32F752	81349	RESISTOR, FIXED, WIRE WOUND	EA	1
18	21	XDHZZ		608D27CNPS	09182	FILTER, RADIO FREQUENCY	AM5	EA 1
18	21	PAHZZ	5915-00-348-0659	2309	96696	FILTER, RADIO FREQUENCY	AM6	EA 1
18	22	PAHZZ	5961-00-681-9190	1N38A	04655	SEMICONDUCTOR DEVICE, DIODE	EA	1
18	23	PAHZZ	5905-00-228-6088	RCR32G331JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
18	24	XDHZZ		608A100VPS	02764	CONTACT, ELECTRICAL	EA	1
18	25	XDHZZ		S4A16325	71700	SOCKET, ELECTRON TUBE	AM6	EA 2
18	25	PAHZZ	5935-00-888-1439	22-3	81073	SOCKET, ELECTRON TUBE	AM5	EA 2
18	26	PAOZZ	5960-00-647-2763	5876	09182	ELECTRON TUBE	EA	1
18	27	XDHZZ		612A57APS	09182	NUT, INNER	AM5	EA 1

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	QTY IN UNIT	
18	27	XDHZZ		2424	09182	NUT, INNER	AM6	EA 1
18	28	XDHZZ		5427-11	45681	PACKING, PERFORMED	EA	1
18	29	XDHZZ		16669-2	53021	CAPACIT., FIXED, MICA DIELECTRIC	EA	1
18	30	XDHZZ	5915-00-504-9411	608D60JPS	09182	COIL, RADIO FREQUENCY	AM5	EA 1
18	30	PAHZZ		2415	02764	COIL, RADIO FREQUENCYYY	AM6	EA 1
18	31	XDHZZ		608012JPS	09182	STRAP, GROUNDING	AM6	EA 1
18	31	XDHZZ		2381	02764	STRMP, GROUNDING	AM6	EA 1
18	32	XDHZZ		BR377PHSPTD	91662	SOCKET, ELECTRON TUBE	EA	1
18	33	XDHZZ		612FPS	09182	BASE RETAINER	AM5	EA 1
18	33	XDHZZ		1028	02820	BASE RETAINER	AM6	EA 1
18	34	XDHZZ		G12CPS	09182	RETAINER, ELECTRON TUBE	AM5	EA 1
18	34	XDHZZ		101W	02820	RETAINER, ELECTRON TUBE	AM6	EA 1
18	35	XDHZZ		AN515C6-8	88044	SCREW	EA	2
18	36	PAHZZ	5905-00-106-9344	RCR20G101JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
18	37	XDHZZ		AN515C4-12	88044	SCREW	EA	2
18	38	XDHZZ		MS35333-87	96906	WASHER	EA	2
18	39	XDHZZ		39-57PS	09182	SPACER	EA	2
18	40	XDHZZ		295670	76530	TERMINAL BOARD	AM5	EA 1
18	40	XDHZZ		1512	71785	TERMINAL BOARD	AM6	EA 1
18	41	XDHZZ		S4A16325	71700	SOCKET, ELECTRON TUBE	AM5	EA 1
18	41	PAHZZ	5935-00-258-8865	2063	66150	SOCKET, ELECTRON TUBE	AM6	EA 1
18	42	PAOZZ	5960-00-188-3899	5675	81349	ELECTRON TUBE	EA	1
18	43	XDHZZ		2141	02764	WASHER, OSCILLATOR TUBE	AM5	EA 1
18	43	XDHZZ		608A88PS	09182	WASHER, OSCILLATOR TUBE	AM5	EA 1
18	44	XDHZZ		AN520C6-6	88044	SCREW	AM6	EA 2
					58/(59 blank)			

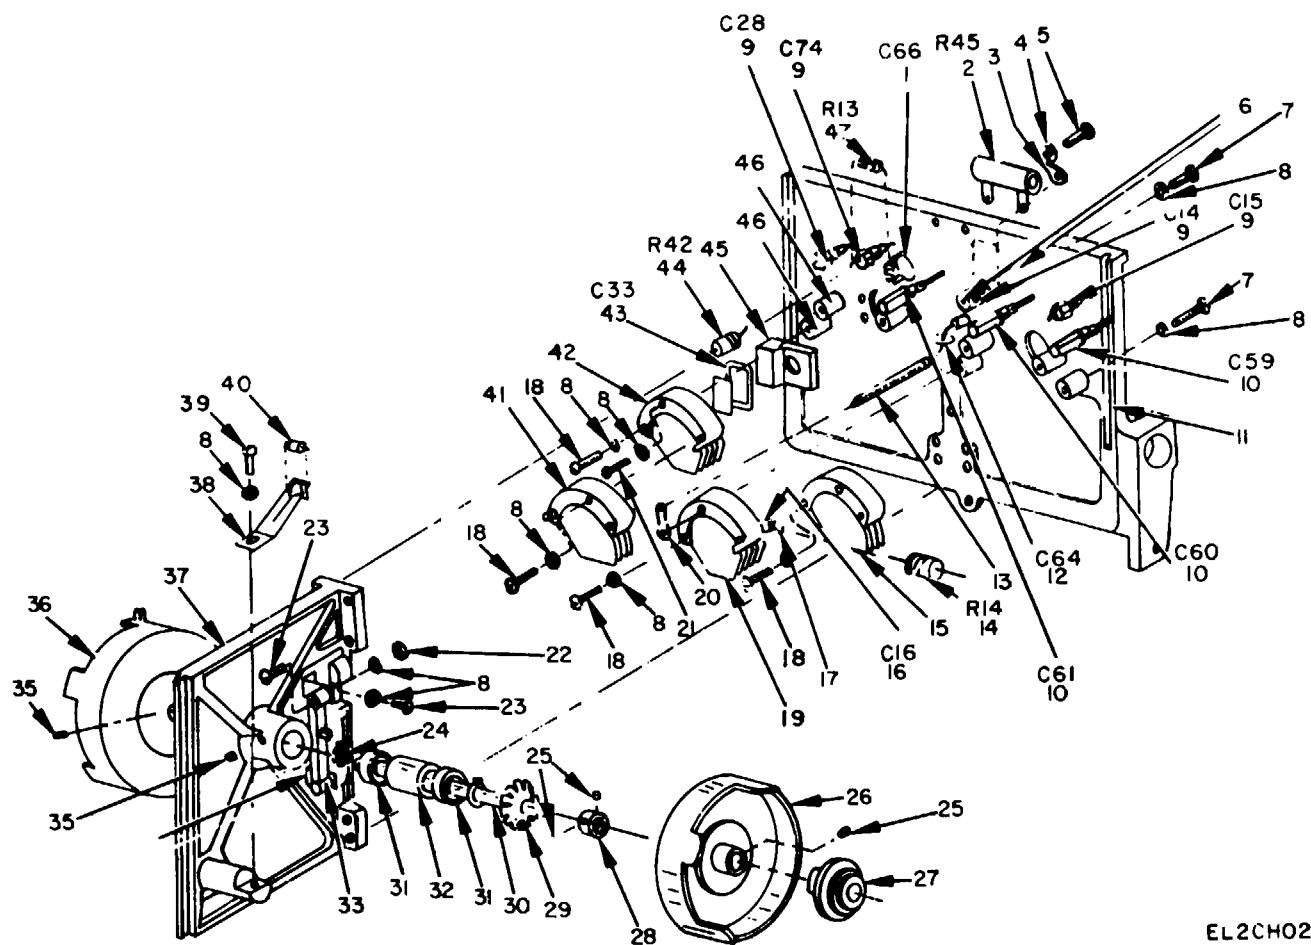

EL2CH024

Figure 19. Generator Tuner Compartment.

SECTION II


TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE		QTY IN UNIT	
						GROUP 020504 GENERATOR TUNER COMPARTMENT			
19	1	PAHZZ	5910-00-851-7794	BPD,01	96095	CAPACITOR, FIXED, CERAMIC	AM5	EA	1
19	1	XDHZZ		CK63Y103Z	81349	CAPACITOR, FIXED,CERAMIIC DIELECTRIC	AM6	EA	1
19	2	PAHZZ	5905-00 -840-4547	RW31V302	81349	RESISTOR, FIXED, WIRE WOUND		EA	1
19	3	PAHZZ	5940-00-617-7558	2560-10-00	78189	TERMIINAL, LUG		EA	1
19	4	XDHZZ		MS35333-90	96906	WASHER		EA	10
19	5	XDHZZ		AN515C10-8	88044	SCREW		EA	10
19	6	PAHZZ	5970-00-178-1152	NL522W01-008	81349	INSULATOR, STANDOFF		EA	2
19	7	XDHZZ		AN515C6-8	88044	SCREW		EA	10
19	8	XDHZZ		MS35333-88	96906	WASHER		EA	25
19	9	PAHZZ	591C-00-804-7466	CK70AW102M	81349	CAPACITOR, FIXED,CERAMIC DIELECTRIC	EA	4	
19	10	PAHZZ	5910-00-577-1293	680015	14674	CAPACITOR, VARIABLE	EA	3	
19	11	XDHZZ		10-006	82805	GASKET, WIRE BRAID		EA	1
19	12	PAHZZ	5910-00-892-9193	16425-2	71743	CAPACITOR, FIXED, CERAMIC DIELECTRIC	EA	1	
19	13	XDHZZ		608D16GPS	09128	CABLE, COUPLING	AM5	EA	1
19	13	XDHZZ		2413	02764	CABLE, COUPLING	AM6	EA	1
19	14	PAHZZ	5905-00-249-4210	RC42GF123J	81349	RESISTOR, FIXED, COMPOSITION	EA	1	
19	15	XDHZZ		608D7P5PS	09182	STATOR, CAPACITOR	AM5	EA	1
19	15	XDHZZ		2385	02764	STATOR, CAPACITOR	AM6	EA	1
19	16	XDHZZ		515C15	56289	CAPACITOR, FIXED, CERAMIC DIELECTRIC		EA	1
19	17	XDHZZ		608A100VPS	09182	COITACT, GRID	AM5	EA	1
19	17	XDHZZ		2140	02764	COKTACT, GRID	AM6	EA	1
19	18	XDHZZ		AN515C6-14	88044	SCREW		EA	8
19	19	XDHZZ		608D7G5PS	09182	STATOR, CAPACITOR	AM5	EA	1
19	19	XDHZZ		2386	02764	STATOR, CAPACITOR	AM6	EA	1
19	20	PAHZZ	5940-00-411-8194	2504-06-00	78189	TERMINAL, LUG		EA	1
19	21	XDHZZ		AN515C6-12	88044	SCREW		EA	1
19	22	XDHZZ		MS35649-62	96906	NUT		EA	2
19	23	XDHZZ		AN515C6-4	88044	SCREW		EA	4
19	24	XDHZZ		5100-37SMI	79136	RING, RETAININ6		EA	1
19	25	XDHZZ	6625-00-553-6053	AN5565D8H21	88044	SETSCREW		EA	2
19	26	PAHZZ		608DM342	28480	COIL, ASSEMBL, OSCILLATOR		EA	1
19	27	XDHZZ		G32KPS	09182	COUPLING, SHAFT FLEXIBLE	AM5	EA	1
19	27	XHDZZ		2122	09182	CWINPLG, SHAFT, FLEXIBLE	AM6	EA	1
19	28	XHDZZ		G32FPS	09182	COLLAR, SHAFT	AM5	EA	1
19	28	XDHZZ		2126	02764	COLLAR, SHAFT	AM6	EA	1
19	29	XDHZZ		803A88PS	09182	WASHER, SPRING TENSION	AM5	EA	1
19	29	XDHZZ		2442	02764	WASHER, SPRING TENSION	AM6	EA	1
19	30	XDHZZ		608D37FPS	09182	SHAFT, TURRET	AM5	EA	1
19	30	XDHZZ		2371	02764	SHAF, TURRET	AM6	EA	1
					61				

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT	
19	31	PAHZZ	3110-00-155-8416	53KDD	21335	BEARING, BALL, ANNULAR		EA	2
19	32	XDHZZ		608D47FPS	09182	SPACER, SLEEVE	AM5	EA	1
19	32	XDHZZ		2377	02764	SPACER, SLEEVE	AM6	EA	1
19	33	XDHZZ		2324	07264	CONTACT ASSEMBLY, COIL	AM5	A	1
19	33	XDHZZ		608D100KPS	09182	CONTACT ASSEMLY, COIL	AM6	EA	1
19	34	XDHZZ		608D5GPS	09182	CLIP, MOUNTIG	AM5	EA	2
19	34	XDHZZ		2362	02764	CLIP, MOUNTING	AM6	A	2
19	35	XOHZZ		AN565D8H4	88044	SETSCREW		EA	5
19	36	XDHHH		608D60APM	09182	COIL ASSEMBLY, AMPLIFIER	AM5	EA	1
19	36	XDHHH		2257	02764	COIL ASSEMBLY, AMPLIFIER	AM6	EA	1
19	37	XDHZZ		608D20BPS	09182	WEB, TURRET	AM5	EA	1
19	37	XDHZZ		2238	09182	WEB, TURRET	AM6	EA	1
19	38	XDHZZ	60BD59CPS	60BD59CPS	09182	SPRING, DETENT	AM5	EA	1
19	38	XDHZZ		2327	02764	SPRING, DETENT	AM6	EA	1
19	39	XDH2Z		AN515C10-6	88044	SCREW		EA	1
19	40	XDHZZ		608D59DPS	09182	ROLLER, DETENT	AM5	EA	1
19	40	XDHZZ		2353	02764	ROLLER,DETENT	AM6	EA	1
19	41	XDHZZ		608D7G6PS	09182	STATOR, CAPACITOR	AM5	EA	1
19	41	XDHZZ		2387	02764	STATOR, CAPACITOR	AM6	EA	1
19	42	XDHZZ		608D7G6PS	09182	STATOR, CAPACITOR	AM5	EA	1
19	42	XDHZZ		2388	02764	STATOR, CAPACITOR	AM6	EA	1
19	43	PAHZZ	5910-00-636-2155	CM15C680J	81349	CAPACITOR, FIXED,MICA DIELECTRIC	AM5	EA	1
19	43	XDHZZ		2323	02764	CAPACITOR, FIXED, MICA DIELECTRIC	AM6	EA	1
19	44	PAHZZ		RC32GF471K	81349	RESISTOR, FIXED, COMPOSITION		EA	1
19	45	XDHZZ		608D58GPS	09182	CONTACT, GRID	AM5	EA	1
19	45	PAHZZ		2382	07388	CONTACT, GRID	AM6	EA	1
19	46	XDHZZ		34-10PS	09182	INSULATOR, STANDOFF	AM5	EA	8
19	46	XDHZZ		2037	02764	INSULATOR, STANDOFF	AM6	EA	8
19	47	PAHZZ		RC326F102JS	81349	RESISTOR, FIXED, COMPOSITION		EA	1

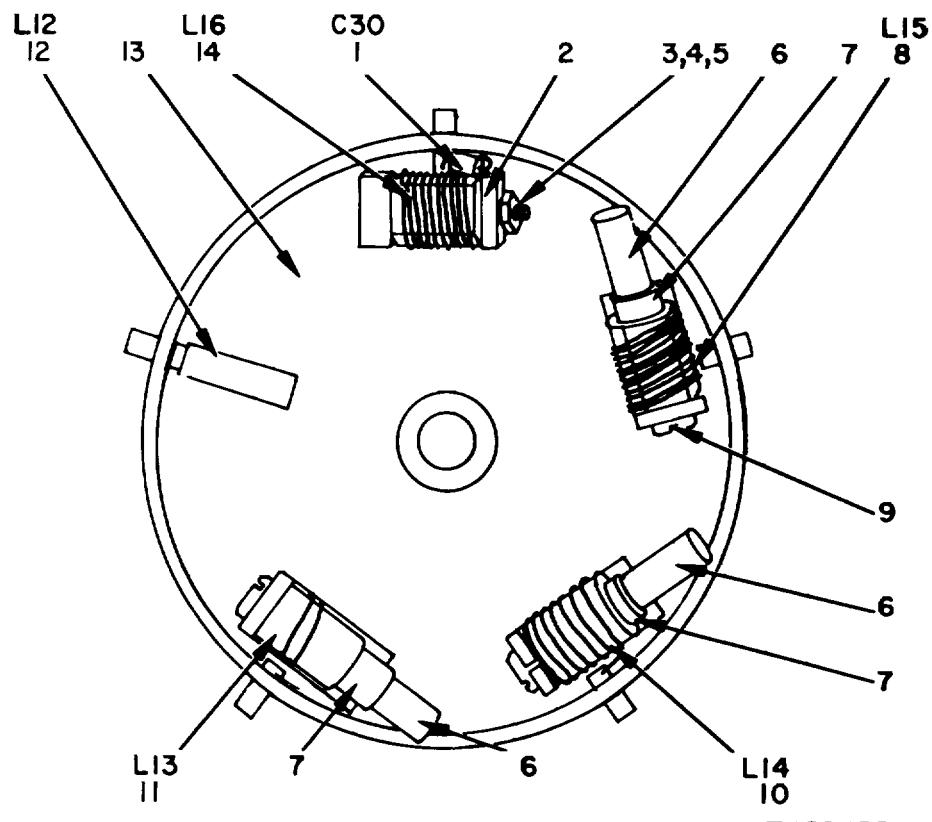

EL2CH025

Figure 20. Amplifier Coil Assembly 608D-60A-PM.

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	QTY IN UNIT	
						GROUP 02050401 AMPLIFIER COIL ASSEMBLY 608D-60A-PM		
20	1	PAHZZ	5910-00-834-9437	GA474DF5PCT	78488	CAPACITOR, FIXED, MICA DIELECTRIC	EA	1
20	2	XDHZZ		83-5PS	09182	BRACKET, COIL	AM5	4
20	2	XDHZZ		2035	02764	BRACKET, COIL	AM6	4
20	3	XDHZZ		AN520PB6-6	88044	SCREW	EA	4
20	4	XDHZZ		MS35338-79	96906	WASHER	EA	4
20	5	XDHZZ		MS35649-62	96906	NUT	EA	4
20	6	XDHZZ		608A56PPS	09182	PLUG, COIL	AM5	3
20	6	XDHZZ		2146	02764	PLUG, COIL	AM6	3
20	7	XDHZZ		608A56PPS	09182	SLEEVE	AM5	3
20	7	XDHZZ		2147	02764	SLEEVE	AM6	3
20	8	XDHZZ		608D60A3PS	09182	COIL ,AMPLIFIER	AM5	1
20	8	XDHZZ		2279	80058	COIL ,AMPLIFIER	AM6	1
20	9	XDHZZ		AN520PB6-8	80058	SCREW	EA	3
20	10	XDHZZ		608D60A4PS	80058	COIL, AMPLIFIER	AM5	1
20	10	XDHZZ		2281	80058	COIL, AMPLIFIER	AM6	1
20	11	XDHZZ		608D60A4PS	80058	COIL, AMPLIFIER	AM5	1
20	11	XDHZZ		2283	80058	COIL, AMPLIFIER	AM6	1
20	12	XDHZZ		608D60A6PS	09182	COIL, AMPLIFIER	AM5	1
20	12	XDHZZ		2284	80058	COIL, AMPLIFIER AM	EA	1
20	13	XDHZZ		608D83APS	09182	TURRET, AMPLIFIER	EA	1
20	14	XCHZZ		608D60A2PS	80058	COIL, AMPLIFIER	AM5	1
20	14	XDHZZ		2277	80058	COIL, AMPLIFIER	AM6	1
					65			


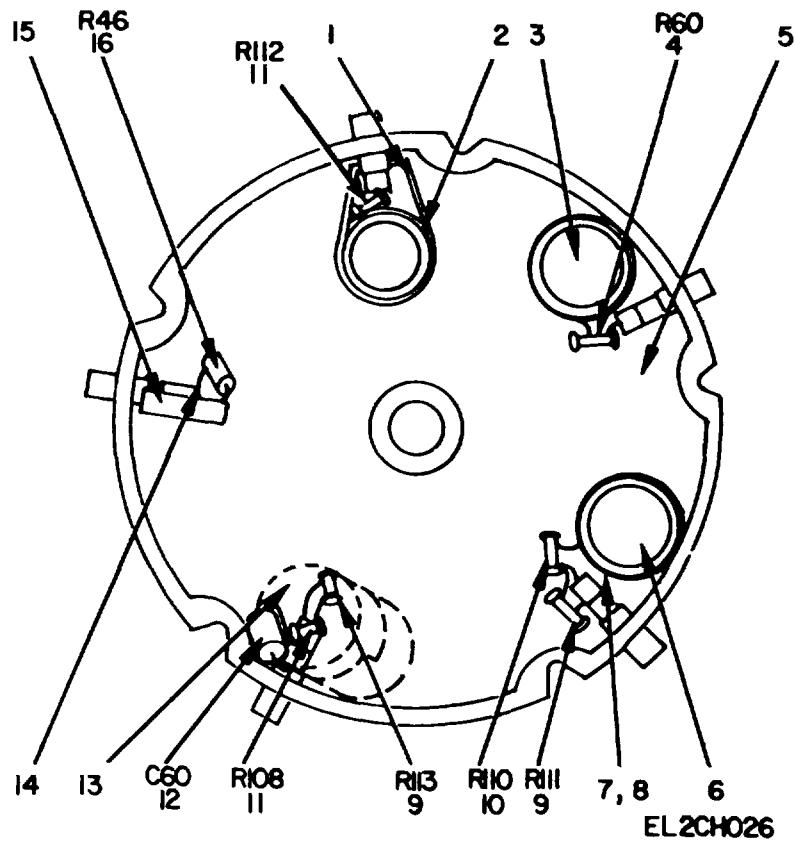


Figure 21. Oscillator Coil Assembly 608D-60B(N)-PM.

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP 02050402 OSCILLATOR COIL ASSEMBLY 608D-60B(N)-PM		
21	1	XDHZZ		608D60B2PS	09182	COIL, OSCILLATOR	AM5	EA 1
21	1	XDHZZ		2393	02764	COIL, OSCILLATOR	AM6	EA 1
21	2	XDHZZ		608D42APS	09182	RING, INDUCTANCE	AM5	EA 1
21	2	XDHZZ		2365	02764	RING, INDUTANCE	AM6	EA 1
21	3	XDHZZ		608A60B4PS	80058	COIL	AM5	EA 1
21	3	XDHZZ		2151	80058	COIL	AM6	EA 1
21	4	XDHZZ		997CX100PLUS10 PERCENT	72819	RESISTOR, FIXED, COMPOSITION	EA	1
21	5	XDHZZ		603B83BPS	09182	TURRET, OSCILLATOR	AM5	EA 1
21	5	XDHZZ		2236	02764	TURRET, OSCILLATOR	AM6	EA 1
21	6	XDHZZ		608A60B5PS	80058	COIL	AM5	EA 1
21	6	XDHZZ		2390	80058	COIL	AM6	EA 1
21	7	XDHZZ		608D60B4PS	09182	RING, INDUCTANCE	AM5	EA 2
21	7	XDHZZ		21421	02764	RING, INDUCTANCE	AM6	EA 2
21	8	XDHZZ		608D60B12PN	09182	COIL ASSEMLY, OSCILLATOR	AM5	EA 1
21	8	XDHZZ		2246	02764	COIL ASSEMBLY, OSCILLATOR	AM6	EA 1
21	9	XDHZZ		997CX150PLUS10 PERCENT	72819	RESISTOR, FIXED, COMPOSITION	EA	2
21	10	XDHZZ		997CX47PLUS10 PERCENT	72819	RESISTOR, FIXED, COMPOSITION	EA	1
21	11	XDHZZ		997CX27PLUS10 PERCENT	72819	RESISTOR, FIXED, COMPOSITION	EA	2
21	12	PAHZZ	5910-00-577-6859	CC21CCH050C	81349	CAPACITOR, FIXED, CERAMIC DIELECTRIC	EA	1
21	13	XDHZZ		608A60B6PS	80058	COIL	AM5	EA 1
21	13	XDHZZ		2389	80058	COIL	AM6	EA 1
21	14	XDHZZ		608D60B3PS	09182	COIL, COUPLING, OSCILLATOR	AM5	EA 1
21	14	XDHZZ		2392	02764	COIL, COUPLING, OSCILLATOR	AM6	EA 1
21	15	XDHZZ		608D60B1PS	09182	COIL, HIGH FREQUENCY	AM5	EA 1
21	15	XDHZZ		2391	02764	COIL, HIGH FREQUENCY	AM6	EA 1
21	16	PAHZZ	5905-00-421-0623	RC20GF120JS	81349	RESISTOR, FIXED, COMPOSITICON	EA	1
					67			

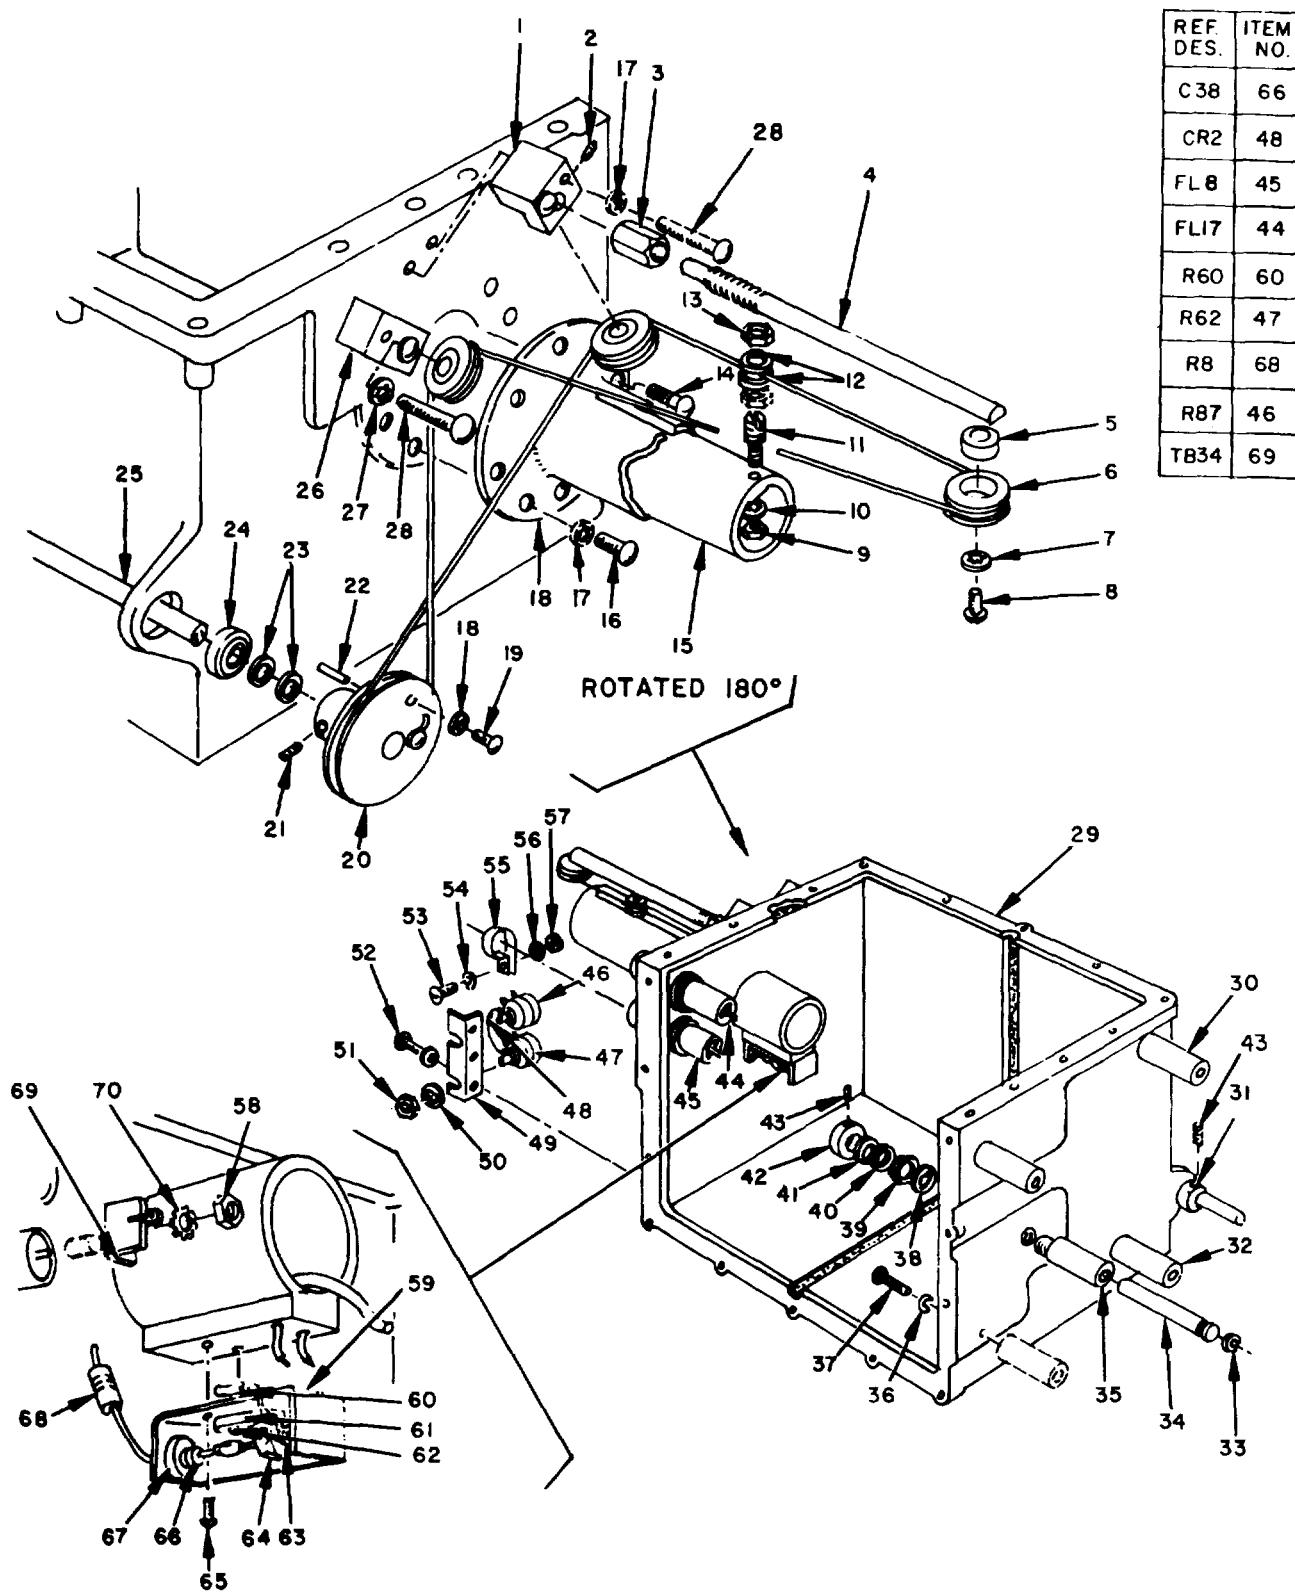

EL2CH027

Figure 22. Generator Housing Assembly 608D-E-116.

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	QTY IN UNIT	
						GROUP 020505 GENERATOR HOUSING ASSEMBLY 608D-E-116		
22	1	XDHZZ		608D34HPS	09182	SUPPORT, PULLEY	AM5	EA 1
22	1	XDHZZ		2355	02764	SUPPORT, PULLEY	AM6	EA 1
22	2	XDHZZ		AN565D8HF	88044	SETSCREW	EA	1
22	3	XDHZZ		608DS329	09182	NUT	AM5	EA 1
22	3	XDHZZ		2357	02764	NUT	AM6	EA 1
22	4	XDHZZ		608D34LPS	09182	SUPPORT, DRIVE	AM5	EA 1
22	4	XDHZZ		2356	02764	SUPPORT, DRIVE	AM6	EA 1
22	5	XDHZZ		33K5	02764	BEARING, BALL, ANNULAR	EA	3
22	6	XDHZZ		608D34FPS	09182	PULLEY, IDLER	AM5	EA 3
22	6	XDHZZ		2366	02764	PULLEY, IDLER	AM6	EA 3
22	7	XDHZZ	5310-00-722-5284	MS35333-89	96906	WASHER	EA	3
22	8	XDHZZ		AN515-8-6	88044	SCREW	EA	3
22	9	PAHZZ		MS35649-42	96906	NUT	EA	1
22	10	XDHZZ		MS35333-87	96906	WASHER	EA	1
22	11	XDHZZ		608D34KPS	09182	CLAMP, ATTENUATOR CABLE	AM5	EA 1
22	11	XDHZZ		2173	02764	CLAMP, ATTENUATOR CABLE	AM6	EA 1
22	12	XDHZZ		H826F	72653	WASHER	AM5	EA 2
22	12	XDHZZ		2486-3	02764	WASHER	AM6	EA 2
22	13	XDHZZ		MS35649-102	96906	NUT	EA	2
22	14	XDHZZ		AN515C6-12	88044	SCREW	EA	1
22	15	XDHZZ		608D34S	28480	ATTENUATOR ASSEMBLY, OUPUT	AM5	EA 1
22	15	XDHZZ	6625-00-630-8878	2224	66150	ATTENUATOR ASSEMBLY, OUTPUT	AM6	EA 1
22	16	XDHZZ		AN515C6-8	88044	SCREW	EA	7
22	17	XDHZZ		MS35335-72	96906	WASHER	EA	4
22	18	XDHZZ		608D34DPS	09182	TUBE, ATTENUATOR	AM5	EA 1
22	18	XDHZZ		2216	02764	TUBE, ATTENUATOR	AM6	EA 1
22	19	XDHZZ		AN960C4	88044	WASHER	EA	2
22	20	XDHZZ		AN515C4-4	88044	SCREW	EA	2
22	21	XDHZZ		608D34EPS	09182	PULLEY	AM5	EA 1
22	21	XDHZZ		2351	02764	PULLEY	AM6	EA 1
22	22	XDHZZ		AN565A8H3	88044	SETSCREW	EA	2
22	23	XDHZZ		59-077-094-0500	72962	PIN, SPRING	EA	1
22	24	XDHZZ		AN960-416	88044	WASHER	EA	2
22	25	PAHZZ	3110-00-151-8095	F4DDC1	21335	BEARING, BALL, ANNULAR	EA	1
22	26	PAHZZ		S2494SS113-4PS	09182	SHAFT	AM5	EA 1
22	26	XDHZZ		2157	02764	SHAFT	AM6	EA 1
22	27	XDHZZ		608D34JPS	09182	SUPPORT, PULLEY	AM5	EA 1
22	27	XDHZZ		2360	02764	SUPPORT, PULLEY	AM6	EA 1
22	28	XDHZZ		AN515C6-20	88044	SCREW	EA	4
					69			

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	QTY IN U/M	QTY INC IN UNIT
22	29	XDHZZ		608D20DPS	09182	HOUSING	AM5	EA 1
22	29	XDHZZ		2256	02764	HOUSING	AM6	EA 1
22	30	XDHZZ		608D47GPS	09812	SPACER, PANEL	AM5	EA 2
22	30	XDHZZ		23032	02764	SPACER, PANEL	AM6	EA 2
22	31	XDHZZ		M71PS	09182	COLLAR, SHAFT	AM5	EA 1
22	31	XDHZZ		2014	09182	COLLAR, SHAFT	AM6	EA 1
22	32	XDHZZ		608D47HPS	09182	SPACER, PANEL	AM5	EA 2
22	32	XDHZZ		2303-1	02764	SPACER, PANEL	AM6	EA 2
22	33	XDHZZ		5100-25SMI	79136	RING, RETAINING	AM6	EA 1
22	34	XDHZZ		2350	02764	EXTENSION SHAFT	AM5	EA 1
22	34	XDHZZ		608D37PPS	09182	EXTENSION SHAFT	AM5	EA 1
22	35	XDHZZ		2349	02764	BUSHING, ADJUST	AM6	EA 1
22	35	XDHZZ		608D17CPS	09182	BUSING, ADJUST	AM6	EA 1
22	36	XDHZZ		MS35333-90	96906	WASHER	EA	4
22	37	XDHZZ		AN515C10-16	88044	SCREW	EA	4
22	38	XDHZZ		MS35333-93	96906	WASHER	EA	1
22	39	XDHZZ		MS35690-602	96906	NUT	EA	1
22	40	XDHZZ		M29APS	09182	WASHER	AM5	EA 1
22	40	XDHZZ		2124	02764	WASHER	AM6	EA 1
22	41	XDHZZ		608A88PS	09182	WASHER	AM5	EA 1
22	41	XDHZZ		2141	02764	WASHER	AM6	EA 1
22	42	XDHZZ		608D59HPS	09182	COLLAR, SHAFT	AM5	EA 1
22	42	XDHZZ		2348	02764	COLLAR, SHAFT	AM6	EA 1
22	43	XDHZZ		AN565D8H2	88044	SETSCREW	EA	3
22	44	XDHZZ		608D27BPS	09182	FILTER, RADIO FREQUENCY	AM5	EA 1
22	44	XDHZZ		2310	02764	FILTER, RADIO FREQUENCY	AM6	EA 1
22	45	XDHZZ	5915-00-914-1771	608A27A	28480	FILTER, RADIO FREQUENCY	AM5	EA 1
22	45	PAHZZ		2382	07388	FILTER, RADIO FREQUENCY	AM6	EA 1
22	46	XDHZZ		RV4ATSA152A	81349	RESISTOR, VARIABLE	EA	1
22	47	XDHZZ		RV4ATSC203B	81349	RESISTOR, VARIABLE	EA	1
22	48	XDHZZ		1N82	09182	SEMICONDUCTOR DEVICE, DIODE	EA	1
22	49	XDHZZ		618B12CPS	09182	BRACKET, MOUNTING	AM5	EA 1
22	49	XDHZZ		2434	02764	BRACKET, MOUNTING	AM6	EA 1
22	50	PAHZZ	5310-00-180-0277	MS35333-76	96906	WASHER	EA	2
22	51	XDHZZ		MS25082-7	96906	NUT	EA	2
22	52	XDHZZ		AN515C6-4	88044	SCREW	EA	2
22	53	XDHZZ		AN515C2-4	88044	SCREW	EA	1
22	54	XDHZZ		MS35335-70	96906	WASHER	EA	1
22	55	XDHZZ		608D12MPS	09182	STRAP, GROUNDING	AM5	EA 1
22	55	XDHZZ		2330	02764	STRAP, GROUNDING	AM6	EA 1

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	QTY IN U/M	QTY INC IN UNIT
22	56	XDHZZ		MS35333-86	96906	WASHER	EA	1
22	57	XDHZZ		MS35649-22	96906	NUT	EA	1
22	58	XDHZZ		MS35649-62	96906	NUT	EA	1
22	59	XDHZZ		608AE28APS	09182	SHIELD, BOLOMETER	AM5	1
22	59	XDHZZ		2133	02764	SHIELD, BOLOMETER	AM6	1
22	60	XDHZZ		997CX1000HMS PLUS 10PERCENT	09182	RESISTOR, FIXED, COMPOSTION	EA	1
22	61	XDHZZ		608A283EPS	09182	INSULATOR	AM5	1
22	61	XDHZZ	5950-00-518-2002	2136	02764	INSULATOR	AM6	1
22	62	XDHZZ		AN500C2-2	88044	SCREW	EA	2
22	63	PAHZZ		608AS3104	09182	COIL	AM5	1
22	63	XDHZZ		2138	09182	COIL	AM6	1
22	64	XDHZZ		608A2ACPS	09182	CLIP, BOLOMETER	AM5	1
22	64	XDHZZ		2134	02764	CLIP, BOLOMETER	AM6	1
22	65	XDHZZ		AN515C2-2	88044	SCREW	EA	2
22	66	PAHZZ	5910-00-892-9193	16425-2	71743	CAPACITOR, FIXED,MICA DIELECTRIC	EA	1
22	67	XDHZZ		608A28DPS	09182	HOLDER, BOLOMETER	AM5	1
22	67	XDHZZ		2135	02764	NOLIER, BOLOMETER	AM6	1
22	68	PAHZZ	5905-00-279-2647	RC32GF152K	81349	RESISTOR, FIXED, COMPOSITION	EA	1
22	69	XDHZZ		29665	76530	TERMINAL BOARD	AM5	1
22	69	PAHZZ	594000 271-4622	1510	71785	TERMINAL BOARD	AM6	1
22	70	PAHZZ	5310-4942-5110	MS35335-88	96906	WASHER	EA	3


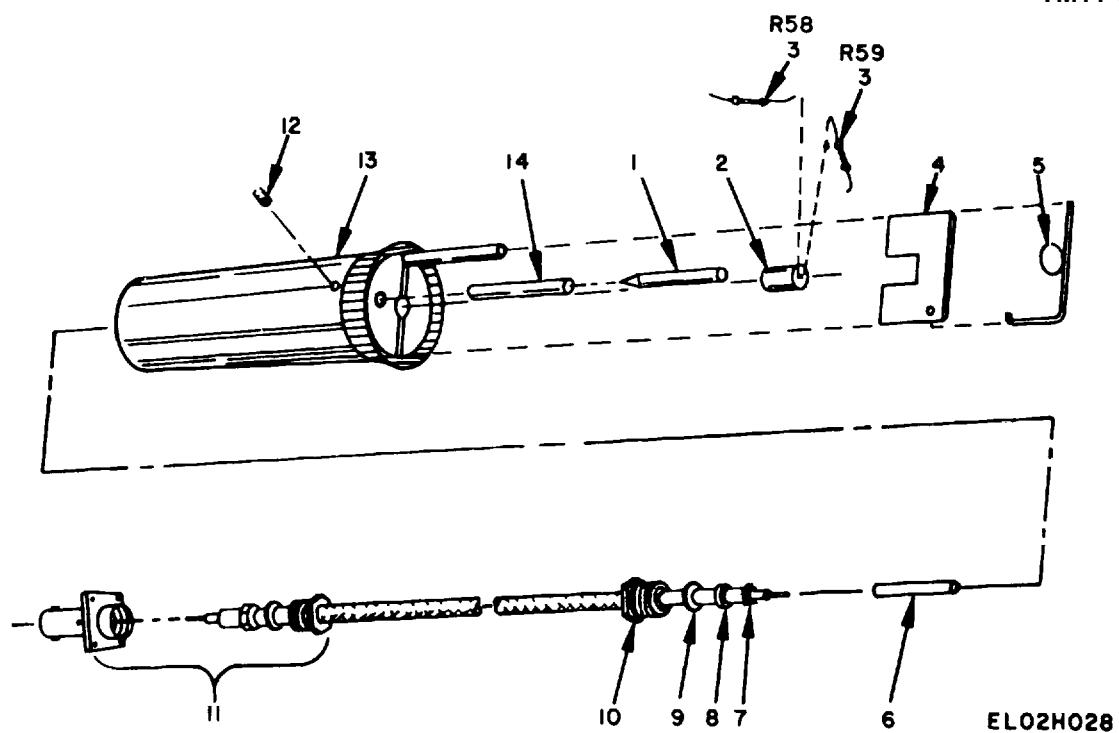


Figure 23. Output Attenuator Assembly 608D-34(N)-PL.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	QTY INC IN UNIT	
23	1	XDHZZ		608A34QPS	02764	GROUP 02050501 OUTPUT ATTENUATOR ASSEMBLY 608D-34-(N)-PL		
23	1	XDHZZ		2106	02764	PIN	AM5	EA 1
23	2	XDHZZ		608A34BPS	02764	PIN	AM6	EA 1
23	2	XDHZZ		2446	02764	BUSHING	AM5	EA 1
23	3	PAHZZ	5905-00-889-0312	DC1-8-53-3	19701	BUSHING	AM6	EA 1
23	4	XDHZZ		608AS3005	02764	RESISTOR, FIXED.FILM	EA	2
23	4	XDHZZ		2444	02764	INSULATOR, ATTENUATOR	AM5	EA 1
23	5	XDHZZ		81022PS	02764	INSULATOR, ATTENUATOR	AM6	EA 1
23	5	XDHZZ		2325	02764	LOOP, PICK UP	AM5	EA 1
23	6	XDHZZ		608A34RPS	02764	LOOP, PICK UP	AM6	EA 1
23	6	XDHZZ		2165	02764	SLEEVE	AM5	EA 1
23	7	XDHZZ		RE49F246N10	02764	SLEEVE	AM6	EA 1
23	8	XDHZZ		RE49F246N11	02764	CLAMP, CONNECTOR	EA	1
23	9	XDHZZ		RE49F246N16	02764	GASKET, CONNECTOR	EA	1
23	10	XDHZZ		RE49F246N3	02764	WASHER, CONNECTOR	EA	1
23	11	PAHZZ	5935-00-926-7460	UG291DU	80058	NUT, CONNECTOR	EA	1
23	12	XDHZZ		AN565A4H2	88044	CONNECTOR, PLUG, ELECTRICAL	EA	1
23	13	XDHZZ		608D34QPS	02764	SETSCREW	EA	1
23	13	XDHZZ		2251	02764	BODY, ATTENUATOR	AM5	EA 1
23	14	XDHZZ		2445	02764	BODY, ATTENUATOR	AM6	EA 1
23	14	XDHZZ		608A34PPS	02764	SLEEVE	AM6	EA 1
					73	SLEEVE	AM6	EA 1

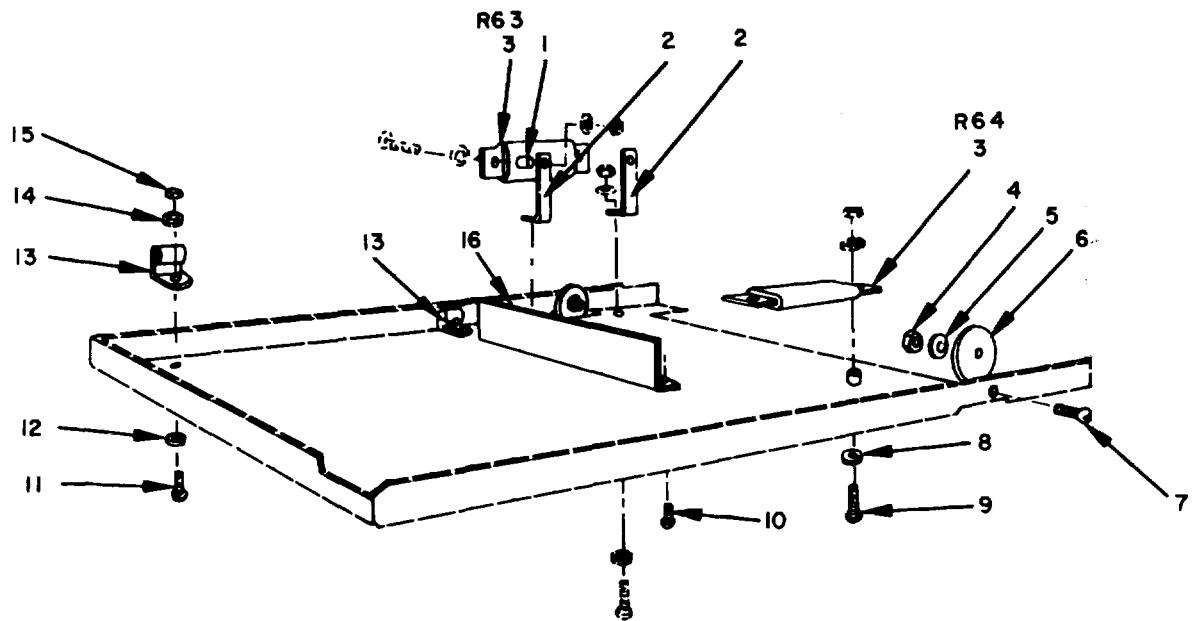

EL2CH029

Figure 24. Bottom Plate Assembly.

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	QTY IN UNIT U/M	
24	1	XDHZZ	5905-00-846-8152	30-56PS	09182	SPACER	AM5	EA 4
24	1	XDHZZ		2478-1	02764	SPACER	AM6	EA 4
24	2	XDHZZ		M47BPS	09182	SUPPORT, RESISTOR	AM5	EA 2
24	2	XDHZZ		2130	02764	SUPPORT, RESISTOR	AM6	EA 2
24	3	PAHZZ		RW21G801	81349	RESISTOR, FIXED, WIRE WOUND	EA	2
24	4	XDHZZ		MS35649-82	96906	NUT	EA	2
24	5	XDHZZ		AN961-8	88044	WASHER	EA	2
24	6	XDHZZ		612A47APS	09182	ROLLER, SUPPORT	AM5	EA 2
24	6	XDHZZ		2425	02764	ROLLER, SUPPORT	AM6	EA 2
24	7	XDHZZ		AN520PB8-12	88044	SCREW	EA	2
24	8	XDHZZ		MS35335-72	96906	WASHER	EA	6
24	9	XDHZZ		AN520PB6-12	88044	SCREW	EA	4
24	10	XDHZZ		AN520B8-8	88044	SCREW	EA	3
24	11	XDHZZ		AN520B6-6	88044	SCREW	EA	4
24	12	XDHZZ		AN960C6	88044	WASHER	EA	2
24	13	XDHZZ		516-6R	95987	CLAMP, LOOP	EA	2
24	14	XDHZZ		MS35333-88	96906	WASHER	EA	8
24	15	XDHZZ		MS35649-62	96906	NUT	EA	8
24	16	XDHZZ		608D12BPS	09182	SUPPORT	AM5	EA 1
24	16	XDHZZ		2292	02764	SUPPORT	EA	1


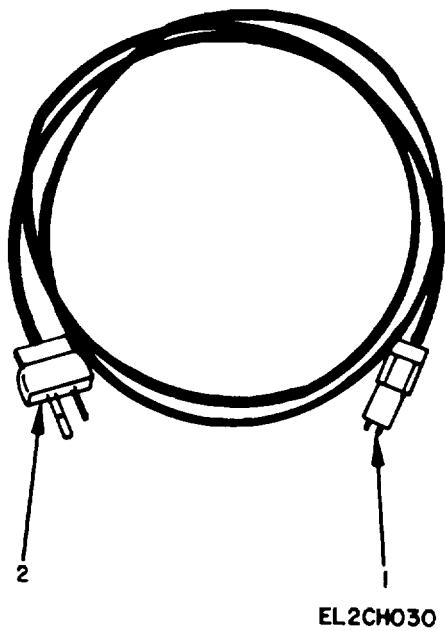


Figure 25. Cable Assembly, Power, Electrical CX3135U6FT

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT
25	1	PAHZZ	5935-00-636-7145	MS91185-1 MS3106-10SL3S	96906 81349	GROUP 03 CANAL ASSEMBLY, POWER, ELECTRICAL CX-3135U6FT CONNECTOR, PLUG, ELECTRICAL CONNECTOR, PLUG, ELECTRICAL	EA EA	1 1

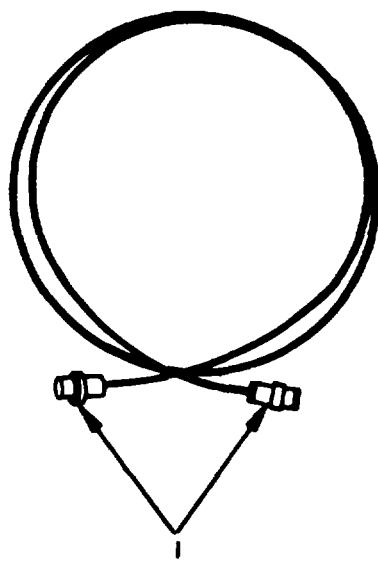

EL2CH03I

Figure 26. Cable Assembly Radio Frequency 2279.

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT
26	1	PAHZZ	5935-00-149-4066	U688U	81349 79	GROUP 04 CONNECTOR, PLUG, ELECTRICAL	EA	2

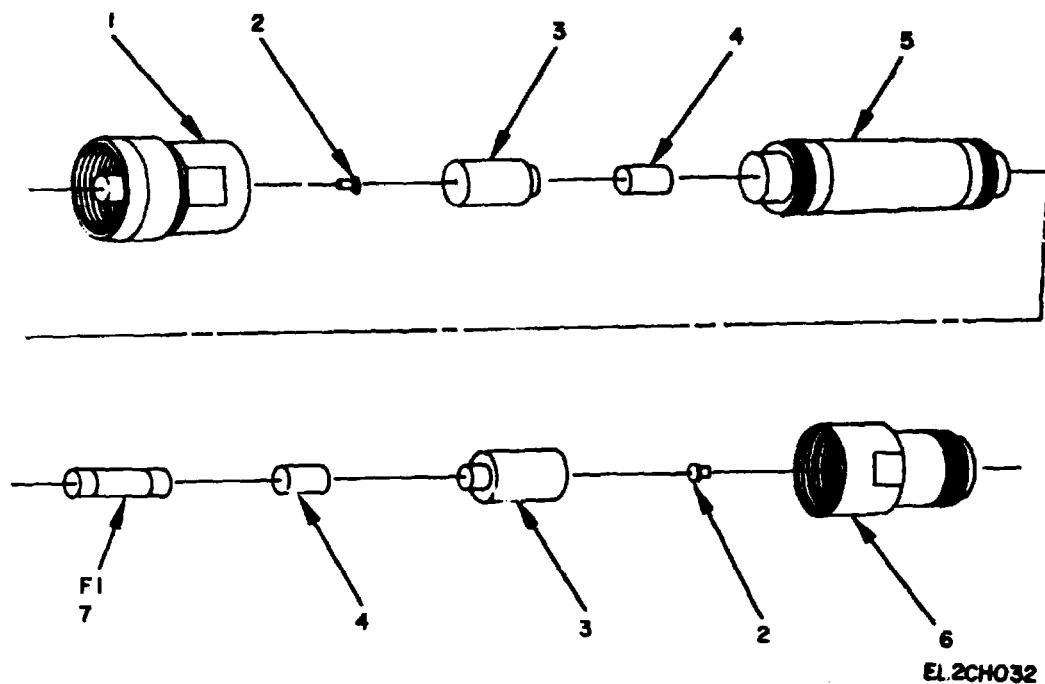


Figure 27. Fuseholder MX-1730/U.

SECTION II

TM11-6625-508-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP 05 FUSEHOLDER MX-1730/U		
27	1	XDHZZ	5935-00-947-1010	UG21DU	81349	CONNECTOR, PLUG, ELECTRICAL	AM5	EA 1
27	2	XDHZZ		608A95A3PS	09182	INSERT, FUSEHOLDER		EA 2
27	2	XDHZZ		2155	02764	INSERT, FUSEHOLDER		EA 2
27	3	XDHZZ		608A95A3PS	09182	INSULATOR, BEAD		EA 2
27	3	XDHZZ		2178	02764	INSULATOR, BEAD		EA 2
27	4	XDHZZ		608A95A2PS	09182	CONTACT, ELECTRICAL		EA 2
27	4	XDHZZ		2154	02764	COHTACT, ELECTRICAL		EA 2
27	5	XDHZZ		608A9A1PS	09182	BODY, FUSEHOLDER		EA 1
27	5	XDHZZ		2153	02764	BODY, FUSEHOLDER		EA 1
27	6	PAHZZ		UG23DU	81349	CONNECTOR, PLUG, ELECTRICAL		EA 1
27	6	XDHZZ		2179	02764	CONNECTOR, PLUG, ELECTRICAL	AM6	EA 1
27	7	XDHZZ		MS90077-5	96906	FUSE, CARTRIDGE		EA 1
					81			

SECTION IV

TM11-6625-508-24P

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
PART NUMBER	FIG. NO.	ITEM NO.	PART NUMBER	FIG. NO.	ITEM NO.
FSCM			FSCM		
5310-00-013-4530	3	42	5940-00-511-8194	17	21
5310-00-013-4530	4	50	5940-00-511-8194	19	20
5310-00-013-4530	5	13	6625-00-519-1645	1	2
5310-00-013-4530	6	8	5310-00-543-2739	5	17
5310-00-013-4530	11	6	5310-00-543-2739	6	47
5310-00-013-4530	13	12	5905-00-549-3944	4	53
5310-00-013-4130	14	16	5310-00-559-0070	15	17
5960-00-100-7301	4	40	5910-00-577-1293	19	10
3110-00-151-8095	16	3	5910-00-577-1306	18	12
3110-00-151-8095	22	25	5940-00-578-4866	18	19
3110-00-155-8416	16	2	5340-00-584-6133	5	18
3110-00-155-8416	19	31	5340-00-584-6133	6	22
5355-00-156-6559	5	27	5340-00-584-6133	11	25
5355-00-156-6559	11	32	5960-00-615-0243	6	1
5960-00-179-3252	11	20	5310-00-616-3555	4	33
5310-00-180-0277	22	50	5960-00-617-4112	11	18
5310-00-184-8977	11	36	5910-00-617-4249	17	11
5940-00-204-9114	11	48	5940-00-617-7558	19	3
5940-00-246-2770	4	34	5930-00-655-1508	4	30
5940-00-246-2770	17	24	5340-00-685-5901	3	40
5940-00-271-4622	18	19	5310-00-722-5284	6	13
5940-00-271-4622	22	69	5310-00-722-5284	22	9
5970-00-284-8009	6	33	5310-00-761-6882	6	37
6250-00-295-1614	5	23	5310-00-761-6882	16	46
5905-00-299-2055		5	5935-00-812-9142	11	13
5935-00-321-4999	4	27	5970-00-988-1277	17	1
5940-00-511-8194	6	29			
PART NUMBER	FIG. NO.	ITEM NO.	PART NUMBER	FIG. NO.	ITEM NO.
AN345C416	88044	16	AN515P86-12	88044	4
AN500C2-2	88044	22	AN515PB6R4	88044	4
AN505PB4-6	88044	4	AN520C6-6	88044	18
AN510-6-4	88044	3	AN520C6-8	88044	5
AN515-8-6	88044	22	AN520C6-8	88044	16
AN515C10-16	88044	16	AN520PB10-8	88044	4
AN515C10-16	88044	22	AN520PB4-6	88044	28
AN515C10-6	88044	19	AN520PB6-12	88044	24
AN51SC10-8	88044	19	AN520PB6-16	88044	11
AN515C2-2	88044	22	AN520PB6-6	88044	19
AN515C2-4	88044	22	AN520PB6-6	88044	20
AN515C4-12	88044	18	AN52P6-6	88044	3
AN515C4-4	88044	4	AN520PB6-8	88044	11
AN515C4-4	88044	16	AN520PB6-8	88044	3
AN515C4-4	88044	22	AN520PB6-8	88044	9
AN515C4-6	88044	4	AN520PB8-12	88044	7
AN515C4-6	88044	5	AN520PB8-8	88044	10
AN515C4-6	88044	17	AN545-6-3	88044	2
AN515C6-12	88044	6	AN565A1032H3	88044	4
AN515C6-12	88044	17	AN565A1032H6	88044	3
AN515C6-12	88044	19	AN565A8H2	88044	12
AN515C6-12	88044	22	AN565A8H3	88044	22
AN515C6-14	88044	14	AN565A8H3	88044	15
AN515C6-14	88044	19	AN565A8H3	88044	22
AN515C6-20	88044	22	AN565B8H2	88044	4
AN515C6-4	88044	6	AN565B8H3	88044	5
AN515C6-4	88044	15	AN56506H2	88044	57
AN515C6-4	88044	18	AN56508H2	88044	8
AN515C6-4	88044	19	AN56508Z	88044	25
AN515C6-4	88044	22	AN565D8H2	88044	22
AN51S56-6	88044	5	AN565D8H3	88044	43
AN515C6-6	88044	6	AN565D8H4	88044	16
AN515C6-6	88044	16	AN565DBH4	88044	36
AN515C6-8	88044	3	AN565D8H4	88044	35
AN515C6-8	88044	6	AN565D8H4	88044	2
AN515C6-8	88044	13	AN565D844	88044	4
AN515C6-8	88044	15	AN960-416	88044	24
AN515C6-8	88044	18	AN960-6	88044	51
AN515C6-8	88044	19	AN960C1O	88044	34
AN515C6-8	88044	22	AN960C1O	88044	19
AN515C8-12	88044	3	AN960C4	88044	19
AN515C8-16	88044	3	AN960C6	88044	13
AN515C8-40	81349	6	AN960C6	88044	14
AN515C8-5	88044	4	AN960C6	88044	7
AN515C8-6	88044	3	AN960C6	88044	37
AN51SC8-8	88044	3	AN960C6	88044	11
AN515C8-8	88044	6	AN960C6	88044	11
AN515PB4-6	88044	6	AN960C6	88044	14
AN515PB4-6	88044	10	AN960C6	88044	12

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
AN961-416	88044	16	10	MS35333-88	96906	15	17
AN961-6	88044	4	B	MS35333-88	96906	16	25
AN961-6	88044	5	12	MS35333-88	96906	18	8
AN961-8	88044	24	5	MS35333-88	96906	19	38
A9BIBHY	81483	11	43	MS35333-88	96906	24	14
BPD.01	96095	7	3	MS35333-89	96906	4	64
BPD005	72125	17	23	MS35333-89	96906	6	42
CE41F100R	81349	11	11	MS35333-89	96906	22	7
CE41F450R	81349	11	15	MS35333-90	96906	4	19
CE41F800R	81349	11	9	MS35333-90	96906	16	20
CE42F100R	81349	6	16	MS35333-90	96906	19	4
CK63Y103Z	81349	5	19	MS35333-90	96906	22	36
CK63Y103Z	81349	7	3	MS35333-91	96906	16	45
CK63Y103Z	81349	10	5	MS35333-93	96906	6	50
CK63Y103Z	81349	11	24	MS35333-93	96906	22	38
CK63Y103Z	81349	13	6	MS35335-70	96906	22	54
CK63Y103Z	81349	14	9	MS35335-71	96906	5	25
CK63Y103Z	81349	19	1	MS35335-71	96906	6	12
CK70AW102M	81349	19	9	MS35335-71	96906	17	14
CM15C680J	81349	17	19	MS35335-72	96906	4	19
CK20D391J	81349	8	9	MS35335-72	96906	5	11
CM20E471J	81349	9	3	MS35335-72	96906	6	46
CM30B182K	81349	9	5	MS35335-72	96906	11	4
CM30B182K	81349	14	22	MS35335-72	96906	13	10
CM35E562G	81349	9	11	MS35335-72	96906	22	17
CP26A1EF103M	81349	12	2	MS35335-72	96906	24	8
CR18U	09182	17	7	MS35335-73	96906	3	32
CTSCW10242	71450	4	53	MS35335-73	96906	6	35
CW123AU	81349	4	23	MS35335-74	96906	3	12
DC1-8-53-3	19701	23	3	MS35335-74	96906	11	39
D2000	91418	18	12	MS35335-75	96906	6	38
F4DDC1	21335	16	3	MS35335-88	96906	22	70
F4DDC1	21335	22	25	MS35338-79	96906	14	15
GA4	78488	17	22	MS35338-79	96906	20	4
GA474DFSPCT	78488	20	1	MS35538-88	96906	4	9
G12BPS	09182	17	2	MS35338-98	96906	11	36
G12CNPS	09182	5	3	MS35469-42	96906	5	26
G12CNPS	09182	6	18	MS35649-102	96906	22	13
G12CNPS	09182	11	2	MS35649-22	96906	22	57
G12CPS	09182	18	34	MS35649-42	96906	6	13
G12EPS	09182	11	7	MS35649-42	96906	17	15
G12FPS	09182	5	5	MS35649-42	96906	22	9
G12FPS	09182	6	3	MS35649-44	96906	4	35
G12FPS	09182	11	12	MS35649-62	96906	3	42
G12FPS	09182	18	33	MS35649-62	96906	4	50
G12GPS	09182	5	7	MS35649-62	96906	5	13
G02PNPS	09182	6	2	MS35649-62	96906	6	8
G32BPS	09182	16	14	MS35649-62	96906	11	6
G32FPS	09182	16	28	MS35649-62	96906	13	12
G32FPS	09182	19	28	MS35649-62	96906	14	16
G32KPS	09182	19	27	MS35649-62	96906	17	17
G69B6PS	09182	17	9	MS35649-62	96906	9	22
G74AEPS	09182	3	17	MS35649-62	96906	20	5
G74XPS	09182	3	16	MS35649-62	96906	22	58
699CPS	09182	3	25	MS35649-62	96906	24	15
H824F	72653	11	50	MS35649-64	96906	4	10
H826F	72653	22	12	MS35649-82	96906	3	11
J1301	99813	4	27	MS35649-82	96906	6	43
LH22XXO	09182	4	68	MS35649-82	96906	24	4
MS25082-7	96906	22	51	M1535690-402	96906	6	37
MS25100-4	96906	4	30	MS35690-402	96906	16	46
MS3KDS	21355	16	51	MS35690-602	96906	22	39
MS3102A10SL3P	96906	4	31	MS90077-5	96906	27	7
MS3106-1OSL3S	81349	25	2	MS90078-12	96906	4	38
MS3533-89	96906	3	7	MS90078-5	96906	4	37
MS35333-70	96906	4	25	MS91185-1	96906	25	1
MS35333-71	96906	4	33	MX1730U	80058	1	6
MS35333-72	96906	5	17	M29APS	09182	22	40
MS35333-72	96906	22	17	M47BPS	09182	13	13
MS35333-76	96906	22	50	M47BPS	09182	14	7
MS35333-86	96906	22	56	M47BPS	09182	24	2
MS35333-87	96906	5	15	M71PS	09182	16	9
MS35333-87	96906	6	11	M71PS	09182	22	31
MS35333-87	96906	17	13	M93-3PS	09182	10	6
MS35333-87	96906	18	38	M93-3PS	09182	13	4
MS35333-87	96906	22	10	M93-41-2PS	09182	7	1
MS35333-88	96906	3	41	M93-5-5-8PS	09182	8	1
MS35333-88	96906	5	10	M93-55-8PS	09182	14	10
MS35333-88	96906	6	6	M93-6PS	09182	9	10
MS35333-88	96906	11	5	M98PS	09182	4	51
MS35333-88	96906	13	9	RC20GF104K	81349	5	20

SECTION IV
TM11-6625-508-24P

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
RC20GF181K	81349	6	27	16425-2	71743	22	66
RC20GF274K	81349	17	30	16669-2	53021	18	29
RC20GF392K	81349	17	20	1698	72765	5	23
RC20GF471K	81349	17	20	2014	02764	16	9
RC20GF474K	81349	11	52	2021	02764	2	22
RC20GF513J	81349	17	30	2023	02764	2	11
RC32GF105K	81349	7	2	2024	02764	2	16
RC32GF105K	81349	9	9	2035	02764	20	2
RC32GF105K	81349	10	3	2037	02764	19	46
RC32GF105K	81349	13	5	2043	02764	2	23
RC32GF105K	81349	14	5	2044	02764	17	4
RC32GF124K	81349	10	2	2056-1	09182	2	17
RC32GF151K	81349	4	22	2056-2	09182	2	19
RC32GF152k	81349	9	4	2063	66150	18	41
RC32GF152K	81349	22	68	2065	02764	4	61
RC32GF181K	81349	8	5	2071	02764	15	9
RC32GF182K	81349	14	2	2084-8	02764	4	66
RC32GF184K	81349	8	1	2103-1	02764	4	13
RC32GF333K	81349	12	4	2103-3	02764	4	12
RC32GF333K	81349	14	18	2106	02764	23	1
RC32GF474K	81349	8	7	2110	02764	16	27
RC32GF564K	81349	8	3	212A74APS	09182	4	43
RC32GF823K	81349	14	1	212G11A	28480	17	3
RC42GF822J	81349	7	8	2122	09182	19	27
RE49F246N10	02764	23	7	2124	02764	22	40
RE49F246N11	02764	23	8	2125	02764	16	14
RE49F246N16	02764	23	9	2126	02764	19	28
RE49F246N3	02764	23	10	2130	02764	13	13
RN15X2842F	81349	9	1	2130	02764	14	7
RS5-5000	81349	8	2	2130	02764	24	2
RV4ATRD103D	81349	4	65	2133	02764	22	59
RV4ATRD203C	81349	4	52	2134	02764	22	64
RV4ATSA152A	81349	5	1	2135	02764	17	3
RV4ATSA152A	81349	12	5	2135	02764	22	67
RV4ATSA152A	81349	22	46	2136	02764	22	61
RV4ATSC203B	81349	22	47	21368-1	14655	1	5
RW21G153	81349	6	39	21368-1	14655	6	15
RW21G801	81349	24	3	2138	09182	22	63
RW31C632	81349	3	39	2140	02764	19	17
RW31V302	81349	19	2	2141	02764	18	43
RW32F752	81349	18	20	2141	02764	22	41
RW32V752	81349	6	36	21421	02764	21	7
S2494SS113-4PS	09182	22	26	2146	02764	20	6
S3KDD	21335	16	2	2147	02764	20	7
S3KDD	21335	19	31	2151	80058	21	3
S4A16325	71700	18	25	2153	02764	27	5
S4A16325	71700	18	41	2154	02764	27	4
TS102P01	81349	17	25	2155	02764	27	2
T17277PHSPTD	09182	17	25	2156	09182	17	9
UG201AU	80058	1	8	2157	02764	22	26
UG21DU	81349	27	1	2159	02764	2	18
UG23DU	81349	27	6	2160	02764	2	21
UG88U	81349	26	1	2161	02764	16	33
1-4-6R	95987	6	9	2165	02764	23	6
1N38A	04655	18	22	2167	02764	16	5
1N82	09182	22	48	2168	02764	16	6
10-006	09182	16	39	2169	02764	16	32
10-006	82805	19	11	2170	02764	16	30
1023-04-3-4	72656	6	25	2173	02764	22	11
1023-04-3-4	72656	11	49	2174	02764	16	41
1030HEXSEAL	97539	4	29	2178	02764	27	3
112-51N	09182	4	11	2179	02764	27	6
112-52N	09182	4	1	2182	66150	18	5
12AU7	81349	5	4	2183	28480	18	11
124-11N	09182	4	61	2184	02764	6	51
130U1-21D	91506	11	18	2188	02764	2	10
146-24PS	09182	16	27	2189	02764	2	20
1493-00	72656	17	14	2197	09182	15	19
1510	88245	5	27	2198	09182	15	12
1510	88245	11	32	2215	02764	16	24
1510	71785	18	19	2216	02764	22	18
1510	71785	22	69	2224	66150	22	15
1512	71700	18	9	2225	02764	4	69
1512	71785	18	40	2236	02764	21	5
16425-2	71743	19	12	2238	09182	19	37

SECTION IV

TM11-6625-508-24P

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
2238ASSEMBLY	09182	15	13	2395	02764	15	10
2239	02764	15	18	2397	02764	16	47
2245	02764	1	7	2399	02764	16	44
2246	02764	21	8	2408	02764	18	15
2247	09187	15	14	2409	02764	18	18
2251	02764	23	13	2413	02764	19	13
2253	02764	17	5	2415	02764	18	30
2256	02764	22	29	2422	02764	18	16
2257	02764	19	36	2424	09182	18	27
2259	02764	16	4	2425	02764	24	6
2277	80058	20	14	2434	02764	22	49
2279	80058	20	8	2442	02764	19	29
2281	80058	20	10	2444	02764	23	4
2283	80058	20	11	2446	02764	23	2
2284	80058	20	12	2458-2459	02764	14	10
2292	02764	24	16	2474	02764	2	12
2298	02764	15	8	2475	02764	2	15
2303	02764	22	32	2476	02764	2	13
23032	02764	22	30	2477	02764	2	14
2305	02764	16	50	2478-1	02764	6	31
2306	02764	16	43	2478-1	02764	24	1
2309	96696	18	21	2486-2	02764	6	26
2310	02764	22	44	2486-3	02764	22	12
2323	02764	19	43	2504-04-00	78189	4	34
2324	02764	19	33	2504-04-00	78189	17	24
2325	02764	23	5	2504-06-00	78189	6	29
2326	09182	18	1	2504-06-00	78189	17	21
2327	02764	19	38	2504-06-00	78189	19	20
2330	02764	18	6	2560-10-00	78189	19	3
2330	02764	22	55	2916-06-01	78189	11	48
2331	02764	17	29	295661	76530	18	19
2333	02764	16	42	295664	76530	18	9
2335	02764	16	38	295665	76530	22	69
2339	02764	16	48	295670	76530	18	40
2340	02764	18	2	3-8-6	95987	3	40
2343	02764	16	49	30-56PS	09182	24	1
2348	02764	22	42	310-138N	28480	6	51
2349	02764	22	35	33K5	02764	22	5
2350	02764	22	34	34-10PS	09182	19	46
2351	02764	22	21	34-11GPS	09182	17	4
2353	02764	19	40	342003	75915	4	6
2354	02764	16	7	37-11PS	75376	3	21
2355	02764	22	1	37-18P	09182	4	14
2356	02764	22	4	39-52	09182	14	17
2357	02764	22	3	39-57P5	09182	18	39
2359	02764	16	35	4308C	91662	17	8
2360	02764	22	27	432-33PS	09185	2	3
2361	02764	15	20	432-34PS	09187	2	7
2362	02764	19	34	432-35P5	09182	2	2
2363	02764	16	18	432-36PS	09182	2	9
2365	02764	21	2	46A42256	09182	3	23
2366	02764	22	6	47	89730	4	40
2367	02764	16	22	5100-25SMI	79136	16	11
2371	02764	19	30	5100-25SMI	79136	22	33
2372	02764	16	29	5100-37SMI	09182	16	1
2373	02764	15	3	5100-37SMI	79136	19	24
2375	02764	16	17	515C15	56289	19	16
2376	02764	16	34	516-6R	95987	24	13
2377	02764	16	23	525A-12C	09182	6	52
2377	02764	19	32	5427-11	45681	18	28
2378	02764	\$15	7	5651	81349	11	16
2379	02764	15	6	5670	81349	6	17
2380	02764	16	16	5675	81349	18	42
2381	02764	18	31	5814/12AU7	09182	11	22
2382	07388	19	45	5876	09182	18	26
2382	07388	22	45	59-01-062-0500	72962	16	12
2385	02764	19	15	59-022-094-0375	72962	15	2
2386	02764	19	19	59-028-125-0500	72962	15	11
2387	02764	19	41	59-077-094-0500	72962	22	23
2388	02764	19	42	6AU6WA	80131	17	6
2389	80058	21	13	6BC4G	09182	18	13
2390	80058	21	6	68C4GASSEMBLY	09182	15	1
2391	02764	21	15	6CL6	81349	6	1
2392	02764	21	14	6RS21GD13BAG1	24455	11	44
2393	02764	21	1	608AS3005	02764	23	4

SECTION IV

TM11-6625-508-24P

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
608AS3104	09182	22	63	608D27CNPS	09182	19	21
608A100VPS	02764	18	24	608D34DPS	09182	22	18
608A100VPS	09182	19	17	608D34EPS	09182	22	21
608A2ACPS	09182	22	64	608D34FPS	09182	22	6
608A20CPS	09182	3	5	608D34HPS	09182	22	1
608A28APS	09182	22	59	608D34JPS	09182	22	27
6008A28OPS	09182	22	67	608D34KPS	09182	22	11
608A28EPS	09182	22	61	608D34LPS	09182	22	4
608A34BPS	02764	23	2	608D34S	28480	22	15
608A34PPS	02764	23	14	608D34QPS	02764	23	13
608A34QPS	02764	23	1	608D36CPS	09182	16	29
608A34RPS	02764	23	6	608D36FPS	09182	16	41
608A36APS	09182	16	5	608D37APS	09182	16	4
608A36BPS	09182	16	6	608D37CNPS	09182	4	59
60BA36DPS	09182	16	32	608D37FPS	09182	19	30
608A36GPS	09182	16	30	608D37JPS	09182	16	47
608A40APS	09182	3	2	608D37KPS	09182	15	10
609A40BPS	09182	3	3	608D37LPS	09182	15	7
608A47APS	09182	16	33	608D37MPS	09182	15	6
608A47CPS	09182	3	18	608D37NPS	09182	16	7
608A56PPS	09182	20	6	608D37PPS	09182	16	22
609A56QPS	09182	20	7	608D37PPD	09182	22	34
609A60B4PS	80058	21	3	608D37RPS	09182	16	49
608A60B5PS	80058	21	6	608D40APS	09182	3	26
609A60B6PS	80058	21	13	608D40BPS	09182	3	15
608A88PS	09182	18	43	608D41APS	09182	16	44
608A88PS	09182	22	41	608D42APS	09182	21	2
608A95A1PS	09182	27	5	608D44NPL	09182	3	1
608A95A2PS	09182	27	4	608D45RNPS	09182	1	7
608A95A3PS	09182	27	2	608D47APS	09182	11	38
608A95A4PS	09182	27	3	608D47CPS	09182	4	4
608A99GPS	09182	4	54	608D47DNPS	09182	15	8
608D1PM	0182	11	30	608D47EPS	09182	4	55
608D1SPS	09182	6	40	608D47FPS	09182	16	23
608D1UPS	09182	6	30	608D47FPS	09182	19	32
608D100KPS	09182	19	33	608D47GPS	09182	22	30
608D12APS	09182	11	45	608047HPS	09182	22	32
608D12BPS	09182	24	16	608D47JPS	09182	16	17
608D12CNPS	09182	4	67	608D47KPS	09182	3	34
608D12DNPSP	09182	4	62	608D48APS	09182	4	16
608D12EPS	09182	4	46	608D5APS	02764	3	38
608D12FPS	09182	17	29	608D5BPS	09182	3	8
608D12GPS	09182	11	42	608D55APS	09182	17	33
608D12HPS	09182	4	45	608D57APS	09182	16	48
608D12JPS	09182	18	31	608D58GPS	09182	19	45
608D12KPS	09182	11	29	608D59APS	09182	18	2
608D12LPS	09182	11	40	608D59CPS	09182	19	38
608D12MPS	09182	22	55	608D59DPS	09182	19	40
608D16GPS	09128	19	13	608D59GPS	09182	19	34
608D17ANPS	09182	4	60	608D59HPS	09182	22	42
608D17BPS	09182	4	3	608D59NPL	09182	3	35
609D17CPS	09182	22	35	608D59N1PL	09182	15	19
608D2NPS	09182	4	69	608D59N2PM	02050	15	12
608D20APS	09182	16	16	608D59N3PS	09182	18	1
608D20BPS	09182	15	18	608D60APM	09182	19	36
608D20BPS	09182	19	37	608D60A2PS	80058	20	14
608D20DPS	09182	22	29	608D60A3PS	09182	20	8
608D20FPS	09182	15	20	608D60A4PS	80058	20	10
608D20GPS	09182	15	3	608D60A5PS	80058	20	11
608D20MPS	09182	la	6	608D60A6PS	09182	20	12
608D24APS	09182	16	35	608D60B1PS	09182	21	15
608DE103	09182	2	1	608D60B12PN	09182	21	8
608DE104	09182	2	6	608D60B2PS	09182	21	1
608DE110	09182	3	31	608D60B3PS	09182	21	14
608DE111	09182	3	36	608D60B4PS	09182	21	7
608DE112	09182	3	33	608D60DPS	09182	18	18
608DE311	09182	16	24	608D60JPS	09182	18	30
608DL113	09182	3	10	608D7G5PS	09182	19	19
608M117	09182	15	14	608D7G6PS	09182	19	42
608DS329	09182	22	3	608D7P5PS	09182	19	15
608DS9N2PM	02050	15	12	608D7P6PS	09182	19	41
608D1BPS	09182	3	37	608D7R5PS	09182	16	50
608D1CPS	09182	5	2	608D7R6PS	09182	16	43
608D24BPS	09182	16	18	608D74APS	09182	4	42
608D27BPS	09182	22	44	600D74BPS	09182	3	28
				600D75RLPM	09182	11	47

SECTION IV
TM11-6625-508-24P
NATIONAL STOCK NUMBER AND PART NUMBER INDEX

PART NUMBER	FIG. FSCM	ITEM NO.	PART NUMBER	FIG. FSCM	ITEM NO.
608D75R2PM	09182	11	28	680015	14674
608D75R3PM	09182	11	33	680021	14674
608075R31PS	09182	12	1	7-16-6R	95987
608D75S1PM	09182	6	54	7-16-6R	95987
608D75S2PM	09182	6	20	7-16-6R	95987
608D75S3PM	09182	6	48	712-11NPS	09182
608D75S4PM	09182	6	44	712-112NPS	09182
608D83BPS	09182	20	13	712-113NPS	09182
608D838PS	09182	21	5	7503	80112
608D83CPS	09182	4	44	803A88APS	09182
608D83EPS	09182	4	5	81022PS	02764
608D88APS	09182	16	34	81410-111	96312
608D88EPS	09182	11	10	83-5PS	09182
608D88HPS	09182	16	38	9-16-6R	95987
608D88JPS	09182	16	42	910-110N	09182
608D99APS	09182	4	56	912-40	02764
608D99BPS	09182	15	9	91254PS	09182
61B3ATPS	09182	4	20	929	63743
612A38APS	09182	6	14	997CX1000HMSPLUS10PERCENT	09182
612A47APS	09182	24	6	997CX100PLUS10PERCENT	72819
612A57APS	09182	18	27	997CX150PLUS10PERCENT	72819
618B12CPS	09182	22	49	997CX27PLUS10PERCENT	72819
657	73734	17	32	997CX47PLUS10PERCENT	72819

LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5920-00-010-6652	4	38	5905-00-228-6088	8	8
5310-00-019-0672	3	30	5905-00-228-6088	18	23
5920-00-043-2641	4	37	5905-00-236-1367	9	2
5305-00-050-9229	3	29	5905-00-247-8715	12	3
5935-00-063-5789	11	21	5950-00-247-8715	13	7
5905-00-104-5757	14	20	5905-00-247-8715	14	8
5905-00-104-8345	6	24	5905-00-247-8732	19	44
5905-00-104-8345	11	53	5905-00-247-8735	14	19
5905-00-104-8351	9	6	5905-00-249-3642	8	4
5905-00-104-8351	13	2	5905-00-249-4210	19	14
5905-00-104-8351	14	6	5905-00-254-1777	10	1
5905-00-106-1247	14	4	5905-00-254-7112	7	9
5905-00-106-9344	18	36	5905-00-256-0410	6	27
5905-00-106-9346	7	4	5935-00-258-8865	18	41
5905-00-106-9346	10	4	5935-00-259-0205	1	8
5905-00-110-0310	17	20	5935-00-260-0516	7	25
5905-00-110-0991	14	21	5905-00-279-2527	8	10
5905-00-111-4744	17	27	5905-00-279-2527	14	11
5905-00-111-4858	17	20	5905-00-279-2537	14	3
5905-00-111-8372	7	6	5905-00-279-2647	9	4
5905-00-120-9152	17	30	5905-00-279-2647	22	68
5905-00-121-9861	11	27	5905-00-279-3499	17	30
5905-00-121-9861	18	10	5905-00-279-4307	13	3
5905-00-121-9861	19	47	5910-00-280-6451	7	3
5905-00-131-1256	14	12	5910-00-280-6451	10	5
5905-00-134-9862	11	46	5910-00-280-6451	11	24
5905-00-136-8338	7	7	5910-00-280-6451	13	6
5935-00-149-4066	26	1	5910-00-280-6451	14	9
5960-00-166-7663	5	4	5905-00-299-1994	7	5
5960-00-166-7663	11	22	5905-00-299-1994	8	7
5960-00-167-0389	11	16	5905-00-299-2004	9	7
5970-00-178-1152	11	49	5915-00-348-0659	18	21
5970-00-178-1152	19	6	5905-00-405-8260	18	3
5960-00-179-4446	5	14	5905-00-421-0623	21	16
5960-00-179-4749	11	14	5905-00-484-0277	6	49
5905-00-185-6946	11	52	6210-00-500-1952	4	39
5960-00-188-3899	18	42	5960-00-501-1488	18	13
5960-00-188-6584	6	17	5915-00-503-0050	18	11
5905-00-192-3987	5	20	5915-00-503-0050	18	11
5905-00-192-4504	7	8	6660-00-504-2437	1	9
5905-00-195-6758	17	26	5915-00-504-9411	18	30
5905-00-195-6806	18	17	5910-00-509-4327	12	2
5905-00-228-6084	9	8	5950-00-518-2002	22	63
5905-00-228-6084	13	1	5910-00-538-1508	17	23

NATIONAL STOCK NUMBER AND PART NUMBER INDEX
LATEST NATIONAL STOCK NUMBER ASSIGNMENTS- CONTINUED

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
6625-00-542-0991	1	1	5910-00-807-5570	18	14
5960-00-542-7004	11	1	5910-00-822-2579	5	29
5905-00-542-9316	11	31	5910-00-823-1068	17	31
5905-00-552-5057	14	2	5910-00-825-7342	18	12
6625-00-553-6053	19	26	5905-00-834-9437	20	1
5920-00-556-0144	4	36	5905-00-840-4547	19	2
5905-00-556-3350	4	47	5905-00-841-4111	18	4
5910-00-557-1094	17	28	5905-00-846-8152	24	3
5910-00-577-6859	21	12	5910-00-851-7794	19	1
5910-00-577-7921	12	18	5960-00-860-7709	17	10
5355-00-616-7324	3	21	5915-00-865-3311	18	15
5355-00-616-7824	4	17	5960-00-879-5078	11	23
5960-00-617-9304	17	6	5961-00-881-9190	18	22
6625-00-630-8878	22	15	5935-00-888-1439	18	25
5920-00-636-0679	1	6	5905-00-889-0312	23	3
5920-00-636-0679	1	6	5910-00-892-9193	19	12
5910-00-636-2155	17	19	5910-00-892-9193	22	66
5910-00-636-2155	19	43	5905-00-898-9007	6	36
5935-00-636-7145	25	1	5915-00-914-1771	19	45
5960-00-647-2763	18	26	5915-00-914-1771	22	45
5910-00-667-6114	17	22	5935-00-926-7460	23	11
6625-00-669-3758	1	1	5310-00-942-5110	22	70
5960-00-681-9802	11	17	5935-00-947-1010	27	6
5961-00-729-6963	17	6	5305-00-954-8114	3	24
5935-00-732-1919	1	4	6210-00-964-8340	4	41
5910-00-804-7466	19	9	5910-00-984-8373	6	28
5910-00-807-5570	5	22	5910-00-984-8373	17	23
5910-00-807-5570	6	23	5910-00-988-4193	18	5
5910-00-807-5570	11	26	5915-00-988-4193	18	5

LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
BPD.01	96095	10	5	MS35335-72	96906	13	10
BPD.01	96095	11	24	MS51957-63	96906	3	29
BPD.01	96095	13	6	M24251-6-2	81349	17	10
BPD.01	96095	14	9	NL522W01-008	81349	11	49
				NL522W01-008	81349	19	6
BPD.01	96095	19	1	RCR20G101JS	81349	18	36
BR316PHSPTD	91662	11	13	RCR20G512JS	81349	17	27
BR377PHSPTD	09182	5	21	RCR20G560JS	81349	6	24
BR377PHSPTD	09182	6	4	RCR20G560JS	81349	11	53
BR377PHSPTD	91662	11	8	RCR32G1O2JS	81349	11	27
BR377PHSPTD	91662	18	32	RCR32G1O3JS	81349	18	10
B13D1B64	81483	11	44	RCR32G123JS	81349	7	4
CC21CH050C	81349	21	12	RCR32G151JS	81349	9	8
CC21CH100D	81349	17	28	RCR32G154JS	81349	14	21
CC30CH470G	81349	17	18	RCR32G154JS	81349	9	6
				RCR32G154JS	81349	13	2
CG409/U(4FT)	80058	1	9	RCR32G183JS	81349	14	6
CK62AW472M	81349	17	31	RCR32G221JS	81349	7	7
CK62AX222K	81349	18	12	RCR32G222JS	81349	14	4
CK70AW102M	81349	19	9	RCR32G224JS	81349	7	6
CM15C680J	81349	19	43	RCR32G224JS	81349	12	3
CM15FD101GPS	81349	6	28	RCR32G273JS	81349	13	7
CM15FD101GPS	81349	17	23	RCR32G303JS	81349	14	20
COM1	09182	6	26	RCR32G331JS	81349	6	49
CP05A1KE104K3	81349	5	22	RCR32G331JS	81349	8	8
CP05AIKE104K3	81349	6	23	RCR32G474JS	81349	18	23
CP05AIKE104K3	81349	11	26	RCR32G820JS	81349	7	5
CP05A1KE104K3	81349	18	14	RCR42G471JS	81349	14	12
CP05A1KE224K3	81349	5	29	RC20GF102K	81349	18	3
CQR29A1KF1O3KMS	81349	17	2	RC20GF120JS	81349	21	17
CX3135/U(6FT)	80058	1	3	RC20GF273K	81349	17	16
CY-1605/USM-44	80058	1	1	RC32GF102JS	81349	19	47
CY-2105A/USM-44A	80058	1	1	RC32GF103K	81349	10	4
MS35215-5	96906	3	24	RC32GF104K	81349	9	7
MS35333-170	96906	3	30	RC32GF106K	81349	14	3
MS35333-72	96906	6	47	RC32GF123K	81349	13	1

SECTION IV

TM11-6625-508-24P

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
RC32GF154JS	81349	13	2	2233	02764	3	38
RC32GF185J	81349	13	3	2234	09182	3	8
RC32GF224J	81349	14	8	2237	09182	3	5
RC32GF471K	81349	19	44	2262	09182	6	54
RC32GF563K	81349	14	19	2263	09182	6	20
RC42GF123J	81349	19	14	2264	02764	6	48
RC42GF223J	81t9	14	11	2265	09182	6	44
RC42GF223J	81349	8	10	2273	02764	1	3
RC42GF273J	81349	10	1	2285	02764	4	60
RC42GF393J	81349	8	4	2286	02764	4	59
RNC70K7502FS	81349	9	2	2287	02764	4	67
RV4ATSA103A	81349	4	47	2288	02764	4	62
RV4ATSA502A	81349	11	46	2290	02764	11	45
RV4NAYSB502A	81349	11	31	2291	02764	11	38
RW31V512	81349	18	4	2293	09182	4	3
SCH-309-70-BB-EE-X	09182	3	16	2294	09182	4	7
S380-70BBDD	75376	4	43	2295	02764	4	44
5380-70DDLBB	75376	3	21	2296	02764	4	55
S380-70DDLBB	75376	4	17	2298	02764	4	46
S76-18BDLM	75376	4	42	2299	02764	4	56
TS-510/U	80058	1	2	2300	09182	4	4
TS-510A/U	80058	1	2	2312	02764	4	45
TS101P01	96906	11	21	2317	09182	3	15
UG291DU	80058	23	11	2321	09182	3	34
UG349BU	80058	1	4	2322	02764	11	10
101W	02820	5	3	2329	02764	11	40
101W	02820	6	18	2336	02764	11	42
1028	02820	5	5	2342	02764	4	14
1028	02820	6	3	2346	02764	11	29
1028	02820	11	12	2347	09182	3	26
1028	02820	18	33	2400	02764	11	28
103W	09182	6	2	2401	02764	11	33
103W	02820	11	2	2428	02764	4	20
110D	98821	17	5	2429	02764	1	9
12AT7WC	81349	5	14	2443	09182	3	3
1470	80112	3	45	2445	02764	23	14
2000	09182	4	11	2448	02764	8	6
2001	09182	4	1	2449	02764	12	1
2003	92764	6	14	2450	09182	13	4
2005	02764	6	15	2451	02764	10	6
2014	09182	22	31	2456-2457	02764	11	47
2017	02764	6	25	2478-3	02764	11	34
2019	02764	11	7	2480	09182	4	5
2032	02764	5	8	2486-2	02764	11	50
2045	02764	6	19	2487	02764	6	33
2051-2	02764	1	5	356-5	08108	5	6
2075	02764	11	41	37-11-PS	75376	4	17
210-71N	09182	4	53	39-56P5	09182	11	34
2120	02764	6	52	5687WB	81349	11	14
2123	02764	4	51	5726	81349	11	23
2127	02764	7	1	6AH6WA	81349	11	1
2128	02764	9	10	6AU6WB	09182	11	17
2129	09182	3	25	6RS21GB89BAG1	24455	11	43
2143	02764	4	54	6U8A	81349	17	6
2152	66150	1	6	608AS420	28480	18	11
2158	02764	4	26	608A27A	28480	18	5
2175	09182	3	2	608A27A	28480	22	45
2191	09182	3	1	608D342	28480	19	26
2193	09182	3	35	608D60C	28480	18	15
2194	09182	3	31	608D60KNPS	09182	18	16
2195	09182	3	36	608D74BPS	09182	3	28
2195-1	02764	11	30	6080WC	81349	11	20
2196	09182	3	33	618BS714	28480	3	23
22-3	81073	18	25	706	95263	4	68
2204	02764	6	30	71A2	73680	4	13
2205	02764	6	40	71A9	73680	4	12
2206	09182	3	37	7235A	96071	4	27
2218	09182	3	10	7503	80112	4	66
2223	02764	5	2	8141D-117	96212	4	39

By Order of the Secretary of the Army:

BERNARD W. RODGERS
General, United States Army
Chief of Staff

Official:

J.C. PENNINGTON
Brigadier General United States Army
The Adjutant General

Distribution:

Active Army:

HISA (33)	Army Dep (1) except
USAISCOM (2)	LBAD (6)
COE (1)	SAAD (30)
TSG (1)	TOAD (14)
USAARENBD (1)	SHAD (3)
DARCOM (1)	Fort Gillem (10)
TRADOC (2)	Units org under fol TOE: (1)
OS Maj Comd (4)	6-615
Tecom (2)	6-616
USACC (4)	7
MDW (1)	11-16
Armies (2)	11-97
Corps (2)	11-98
Svc Colleges (1)	11-117
USASIGS (5)	11-500 (AA-AC)
USAADS (2)	17
USAFAFS (2)	29-1
USAARMS (2)	29-11
USAIS (2)	29-16
USAES (2)	29-17
USAICS (3)	29-21
MAAG (1)	29-25
USARMIS (1)	29-27
USAERDAA (1)	29-35
USAERDAW (1)	29-36
USA Dep (1)	29-37
Sig Sec USA Dep (1)	29-51
Sig Dep (1)	29-75
Sig FLDMS (1)	31-105
Fort Gordon (10)	37
Fort Huachuc (10)	55-89
Fort Carson (5)	57
Ft Richardson (ECOM Ofc) (2)	57-100

NG: State AG (3); Units - None

USAR: None

For explanation of abbreviations used, see AR 310-50.

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?



THEN... JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, CAREFULLY TEAR IT
OUT, FOLD IT AND DROP IT
IN THE MAIL!

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-5825-270-10

PUBLICATION DATE

23 Jul 81

PUBLICATION TITLE

Radio Frequency R-2176/FRN

BE EXACT... PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

PAGE
NO.

PARA-
GRAPH

FIGURE
NO.

TABLE
NO.

TEAR ALONG PERFORATED LINE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS
• ARE OBSOLETE.

P.S.-IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR
RECOMMENDATION MAKE A CARBON COPY OF THIS
AND GIVE IT TO YOUR HEADQUARTERS.

PIN: 020850-00